

COLOR INDEX	
[Symbol]	PLOT BOUNDARY
[Symbol]	ABUTTING ROAD
[Symbol]	PROPOSED WORK (COVERAGE AREA)
[Symbol]	EXISTING (To be retained)
[Symbol]	EXISTING (To be demolished)

AREA STATEMENT (BMP)		VERSION NO: 1.0.11
PROJECT DETAIL:		VERSION DATE: 01/11/2018
Authority: BBMP	Plot Use: Residential	
Inward No: BBMP/Ad.Com./EST/1349/19-20	Plot SubUse: Plotted Resi development	
Application Type: Sonama Panwari	Land Use Zone: Residential (Main)	
Proposal Type: Building Permission	Plot/Sub Plot No.: SITE NO-1,	
Nature of Sanction: New	Khata No. (As per Khata Extract): SITE NO-1,	
Location: Ring-II	Locality / Street of the property: SITE NO-1, NANDI DURGA ROAD EXTN 8th ROAD, JAYAMAHAL, BANGALORE, WARD NO- 63, PID NO- 92-8-1,	
Building Line Specified as per Z.R: NA		
Zone: East		
Ward: Ward-063		
Planning District: 204-Benson Town		
AREA DETAILS:		SQ.MT.
AREA OF PLOT (Minimum)	(A)	222.36
NET AREA OF PLOT	(A-Deductions)	222.36
COVERAGE CHECK		
Permissible Coverage area (75.00 %)		166.77
Proposed Coverage Area (43.77 %)		97.32
Achieved Net coverage area (43.77 %)		97.32
Balance coverage area left (31.23 %)		69.45
FAR CHECK		
Permissible F.A.R. as per zoning regulation 2015 (1.75)		389.12
Additional F.A.R. within Ring II (for amalgamated plot -)		0.00
Allowable TOR Area (60% of Plotted FAR)		0.00
Premium FAR for Plot within Impact Zone (-)		0.00
Total Perm. FAR area (1.75)		389.12
Residential FAR (97.28%)		285.21
Proposed FAR Area		293.19
Achieved Net FAR Area (1.32)		293.19
Balance FAR Area (0.43)		95.93
BUILT UP AREA CHECK		
Proposed BuiltUp Area		407.62
Achieved BuiltUp Area		407.62

Approval Date : 01/10/2020 3:38:34 PM

Payment Details

Sr.No.	Challan Number	Receipt Number	Amount (INR)	Payment Mode	Transaction Number	Payment Date	Remark
1	BBMP/34956/CH/19-20	BBMP/34956/CH/19-20	1844	Online	9626942519	01/06/2020 4:50:31 PM	-
	No.	Head	Amount (INR)	Remark			
	1	Scrutiny Fee	1844	-			

Approval Condition :

This Plan Sanction is issued subject to the following conditions :


- Sanction is accorded for the Residential Building at SITE NO-1, SITE NO-1, NANDI DURGA ROAD EXTN 8th ROAD, JAYAMAHAL, BANGALORE, WARD NO- 63, PID NO- 92-8-1, Bangalore.
- Sanction is accorded for Residential use only. The use of the building shall not be deviated to any other use.
- 3.87.09 area reserved for car parking shall not be converted for any other purpose.
- Development charges towards increasing the capacity of water supply, sanitary and power main has to be paid to BWSSB and BESCOM if any.
- Necessary ducts for running telephone cables, cables at ground level for postal services & space for dumping garbage within the premises shall be provided.
- The applicant shall INSURE all workmen involved in the construction work against any accident / untoward incidents arising during the time of construction.
- The applicant shall not stock any building materials / debris on footpath or on roads or on drains. The debris shall be removed and transported to near by dumping yard.
- The applicant shall maintain during construction such barricading as considered necessary to prevent dust, debris & other materials endangering the safety of people / structures etc. in & around the site.
- The applicant shall plant at least two trees in the premises.
- Permission shall be obtained from forest department for cutting trees before the commencement of the work.
- License and approved plans shall be posted in a conspicuous place of the licensed premises. The building license and the copies of sanctioned plans with specifications shall be mounted on a frame and displayed and they shall be made available during inspections.
- If any owner / builder contravenes the provisions of Building Bye-laws and rules in force, the Architect / Engineer / Supervisor will be informed by the Authority in the first instance, warned in the second instance and cancel the registration if the same is repeated for the third time.
- Technical personnel, applicant or owner as the case may be shall strictly adhere to the duties and responsibilities specified in Schedule - IV (Bye-law No. 3.6) under sub section IV-8 (e) to (k).
- The building shall be constructed under the supervision of a registered structural engineer.
- On completion of foundation or footings before erection of walls on the foundation and in the case of columnar structure before erecting the columns 'COMMENCEMENT CERTIFICATE' shall be obtained.
- Drinking water supplied by BWSSB should not be used for the construction activity of the building.
- The applicant shall ensure that the Rain Water Harvesting Structures are provided & maintained in good repair for storage for non potable purposes or recharge of ground water at all times having a minimum total capacity mentioned in the Bye-law 32(a).
- If any owner / builder contravenes the provisions of Building Bye-laws and rules in force, the authority will inform the same to the concerned registered Architect / Engineer / Supervisor in the first instance, warn in the second instance and cancel the registration of the professional if the same is repeated for the third time.
- The Builder / Contractor / Professional responsible for supervision of work shall not materially and structurally deviate the construction from the sanctioned plan, without previous approval of the authority. They shall explain to the owner about the risk involved in contravention of the provisions of the Act, Rules, Bye-laws, Zoning Regulations, Standing Orders and Policy Orders of the BBMP.
- In case of any false information, misrepresentation of facts, or pending court cases, the plan sanction is deemed cancelled.

Special Condition as per Labour Department of Government of Karnataka vide ADDENDUM (HosadaagHoodke) Letter No. LD/95/LET/2013, dated: 01-04-2013 :


- Registration of Applicant / Builder / Owner / Contractor and the construction workers working in the construction site with the "Karnataka Building and Other Construction workers Welfare Board" should be strictly adhered to.
- The Applicant / Builder / Owner / Contractor should submit the Registration of establishment and list of construction workers engaged at the time of issue of Commencement Certificate. A copy of the same shall also be submitted to the concerned local Engineer in order to inspect the establishment and ensure the registration of establishment and workers working at construction site or work place.
- The Applicant / Builder / Owner / Contractor shall also inform the changes if any of the list of workers engaged by him.
- At any point of time No Applicant / Builder / Owner / Contractor shall engage a construction worker in his site or work place who is not registered with the "Karnataka Building and Other Construction workers Welfare Board".

Note :


- Accommodation shall be provided for setting up of schools for imparting education to the children of construction workers in the labour camps / construction sites.
- List of children of workers shall be furnished by the builder / contractor to the Labour Department which is mandatory.
- Employment of child labour in the construction activities strictly prohibited.
- Obtaining NOC from the Labour Department before commencing the construction work is a must.
- BBMP will not be responsible for any dispute that may arise in respect of property in question.
- In case if the documents submitted in respect of property in question is found to be false or fabricated, the plan sanctioned stands cancelled automatically and legal action will be initiated.

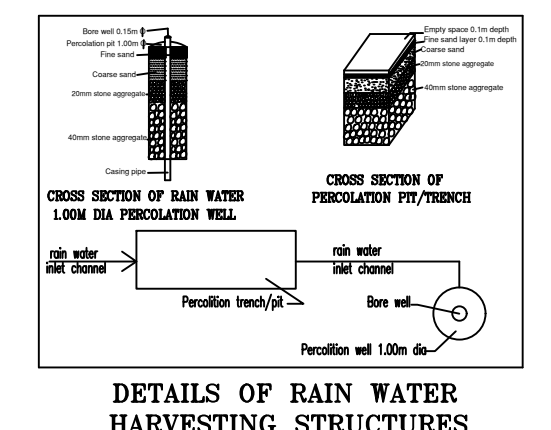


DETAILS OF RAIN WATER HARVESTING STRUCTURES

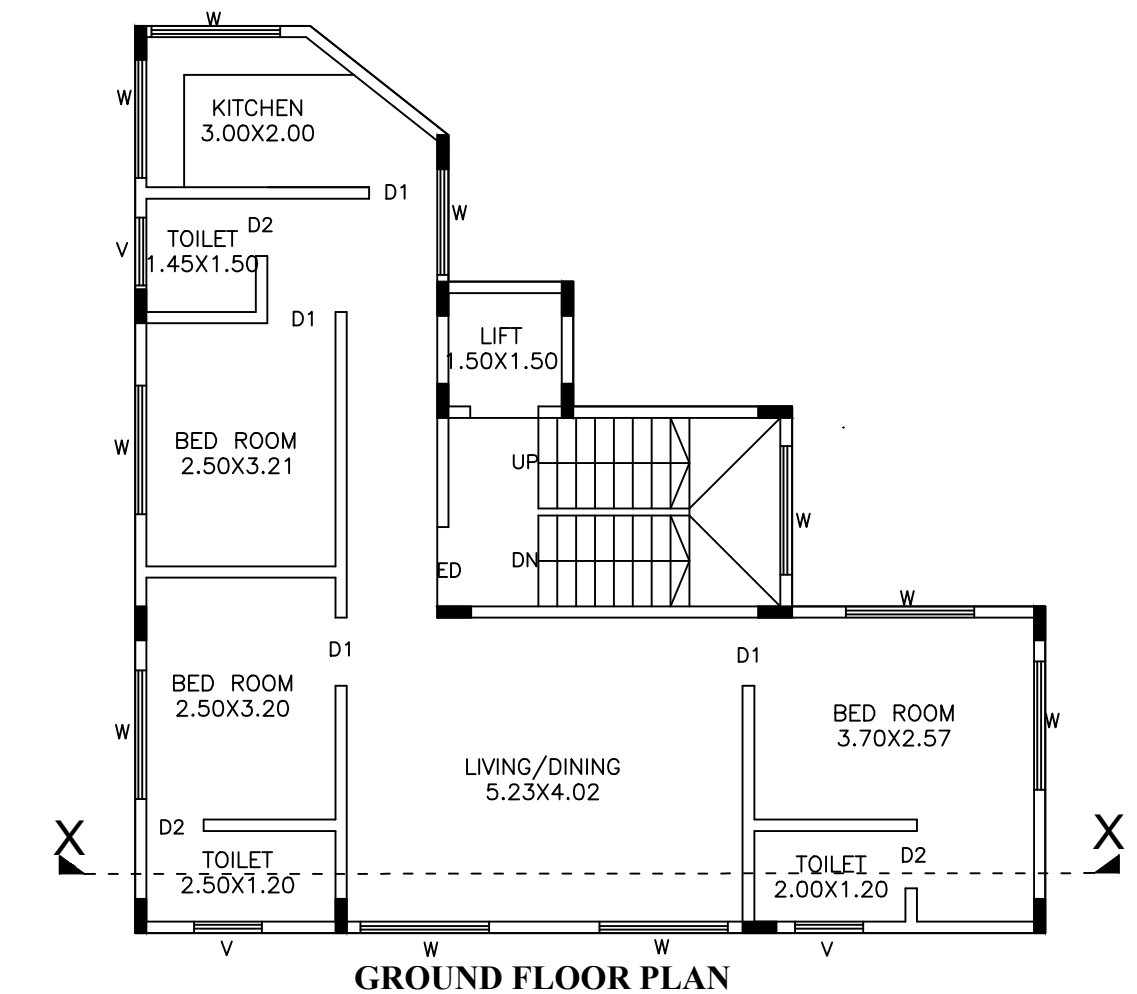


GROUND FLOOR PLAN

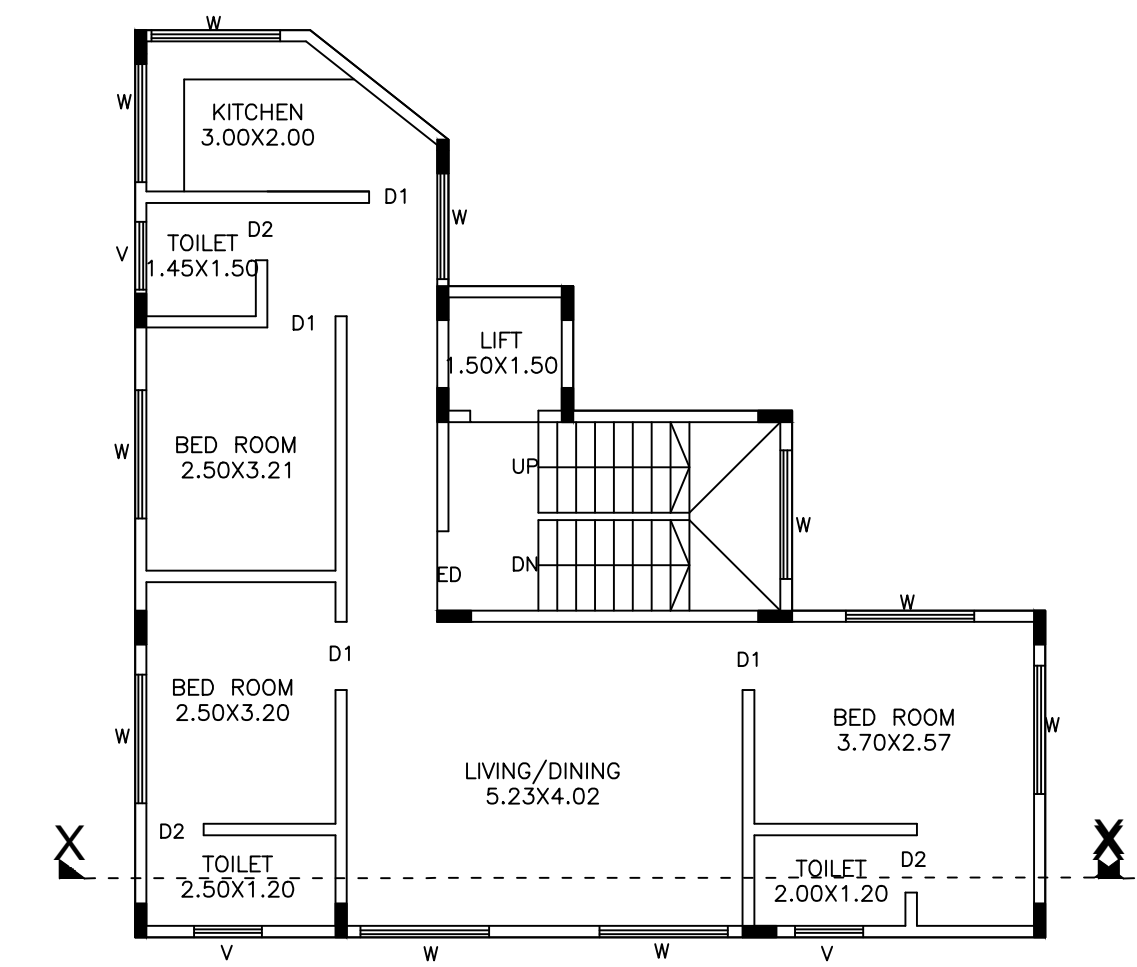


FIRST FLOOR PLAN

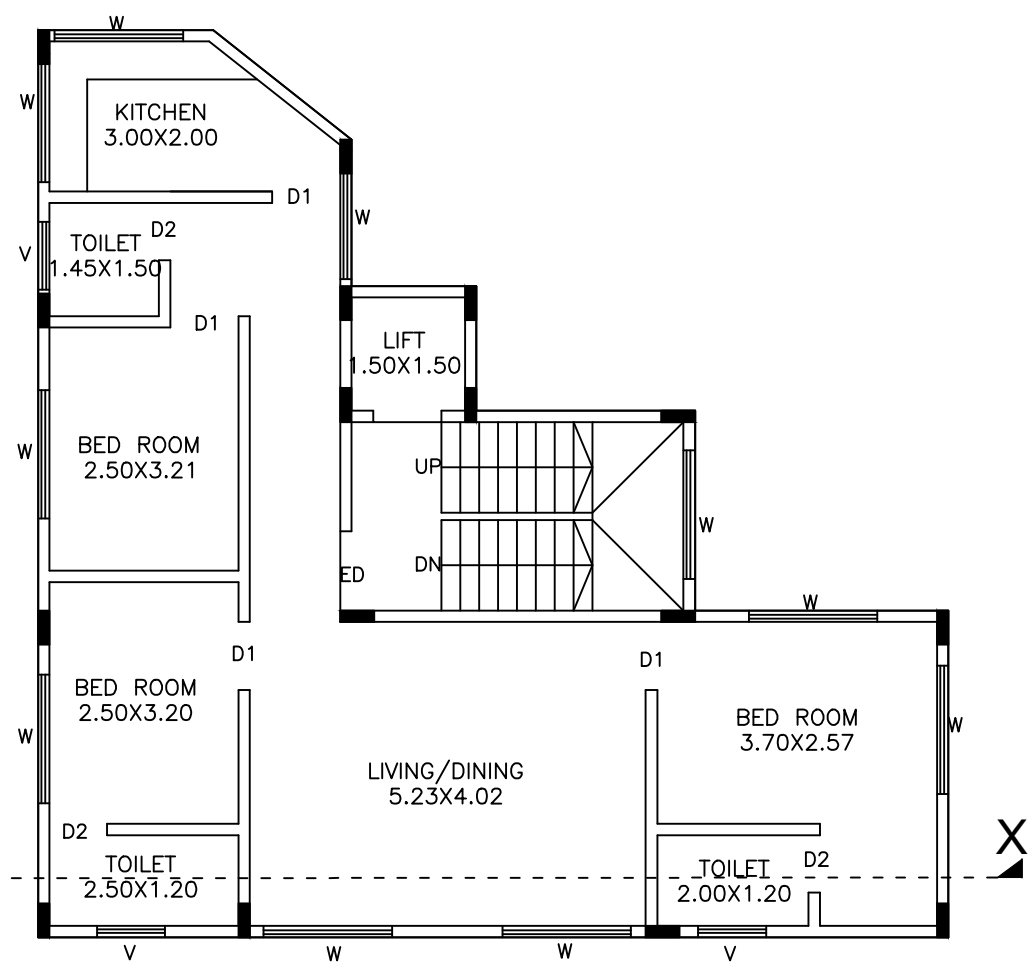


SECOND FLOOR PLAN

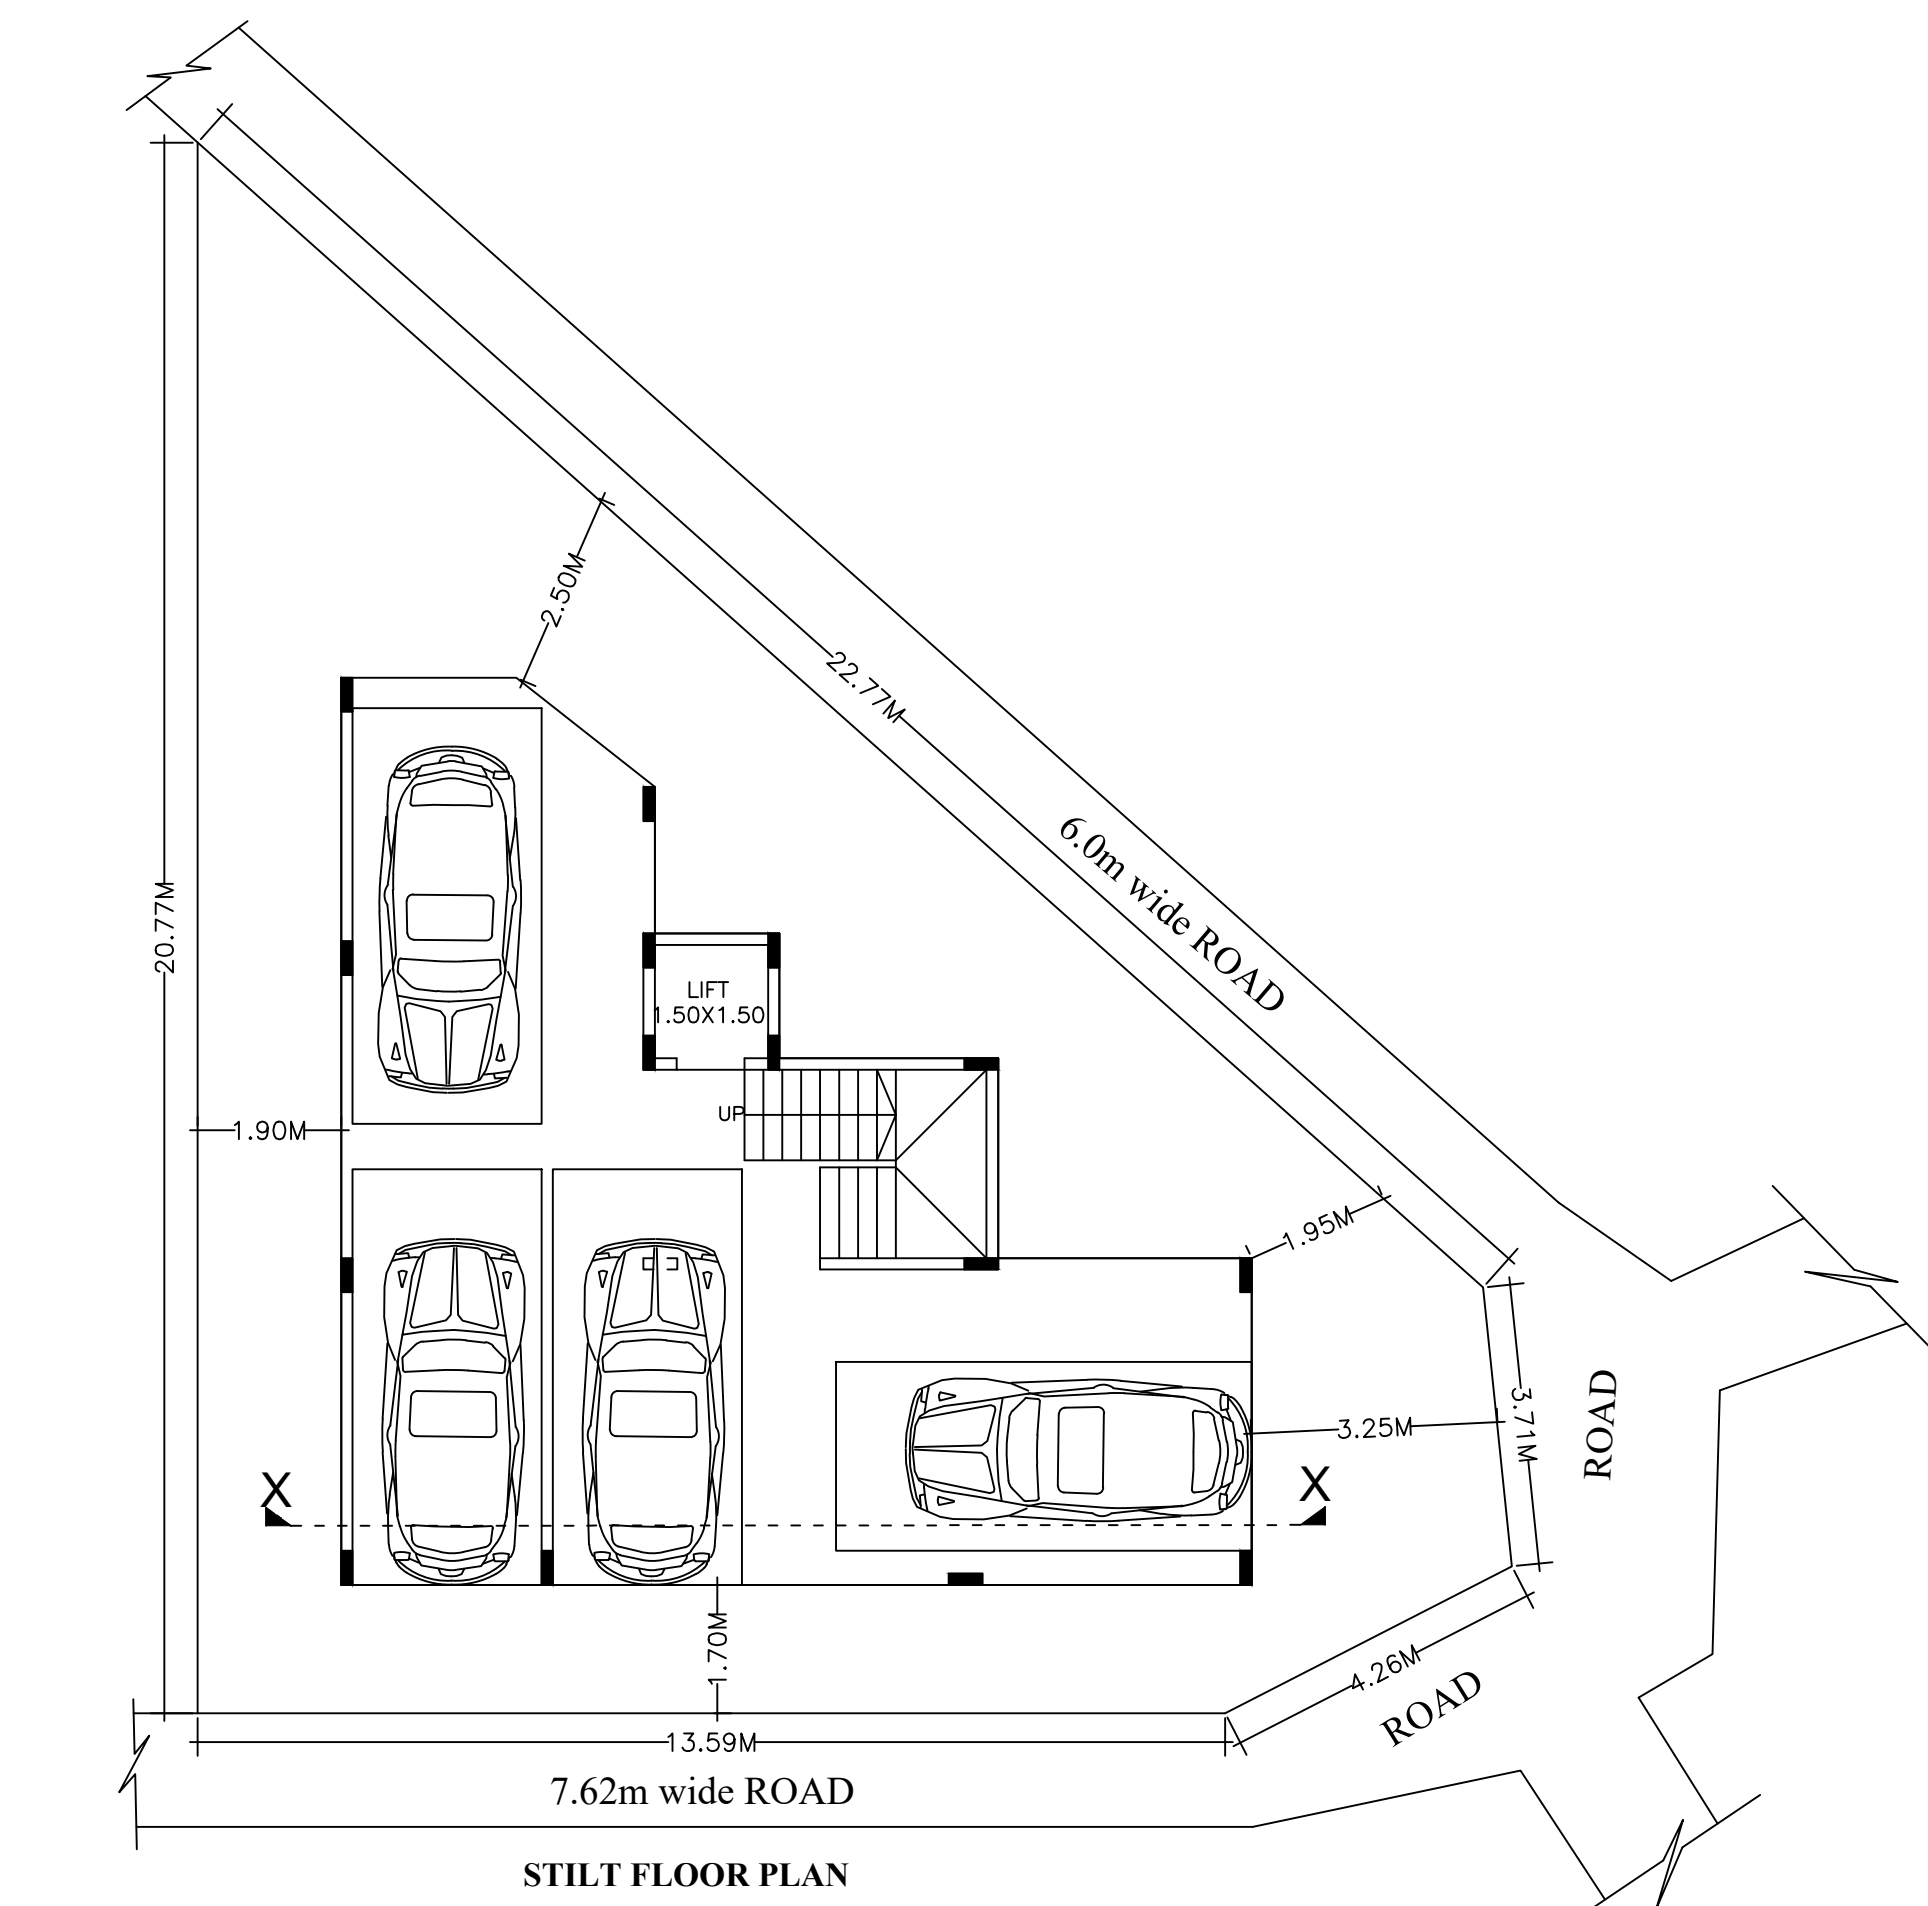


STILT FLOOR PLAN

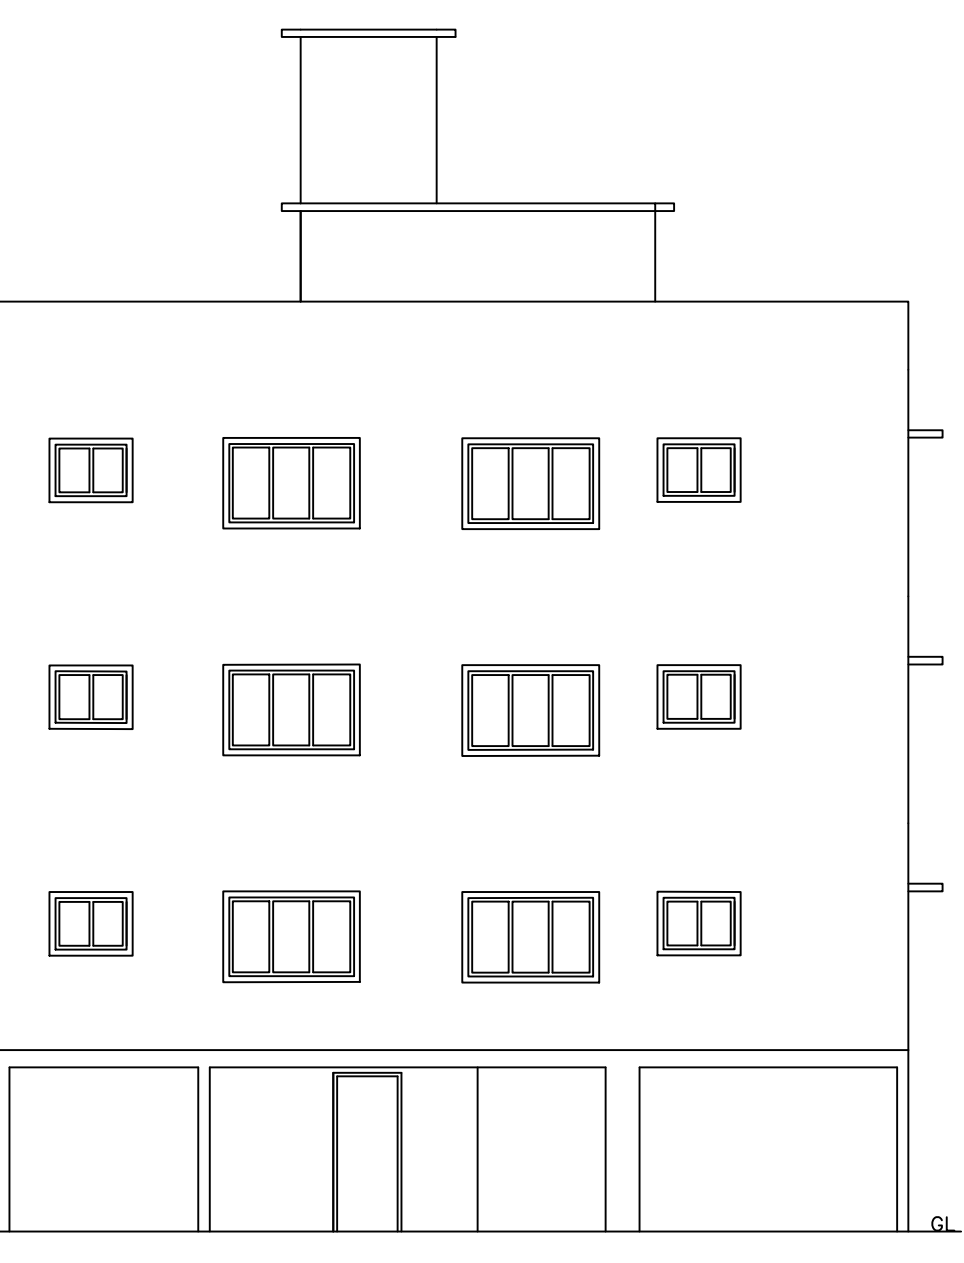


ELEVATION

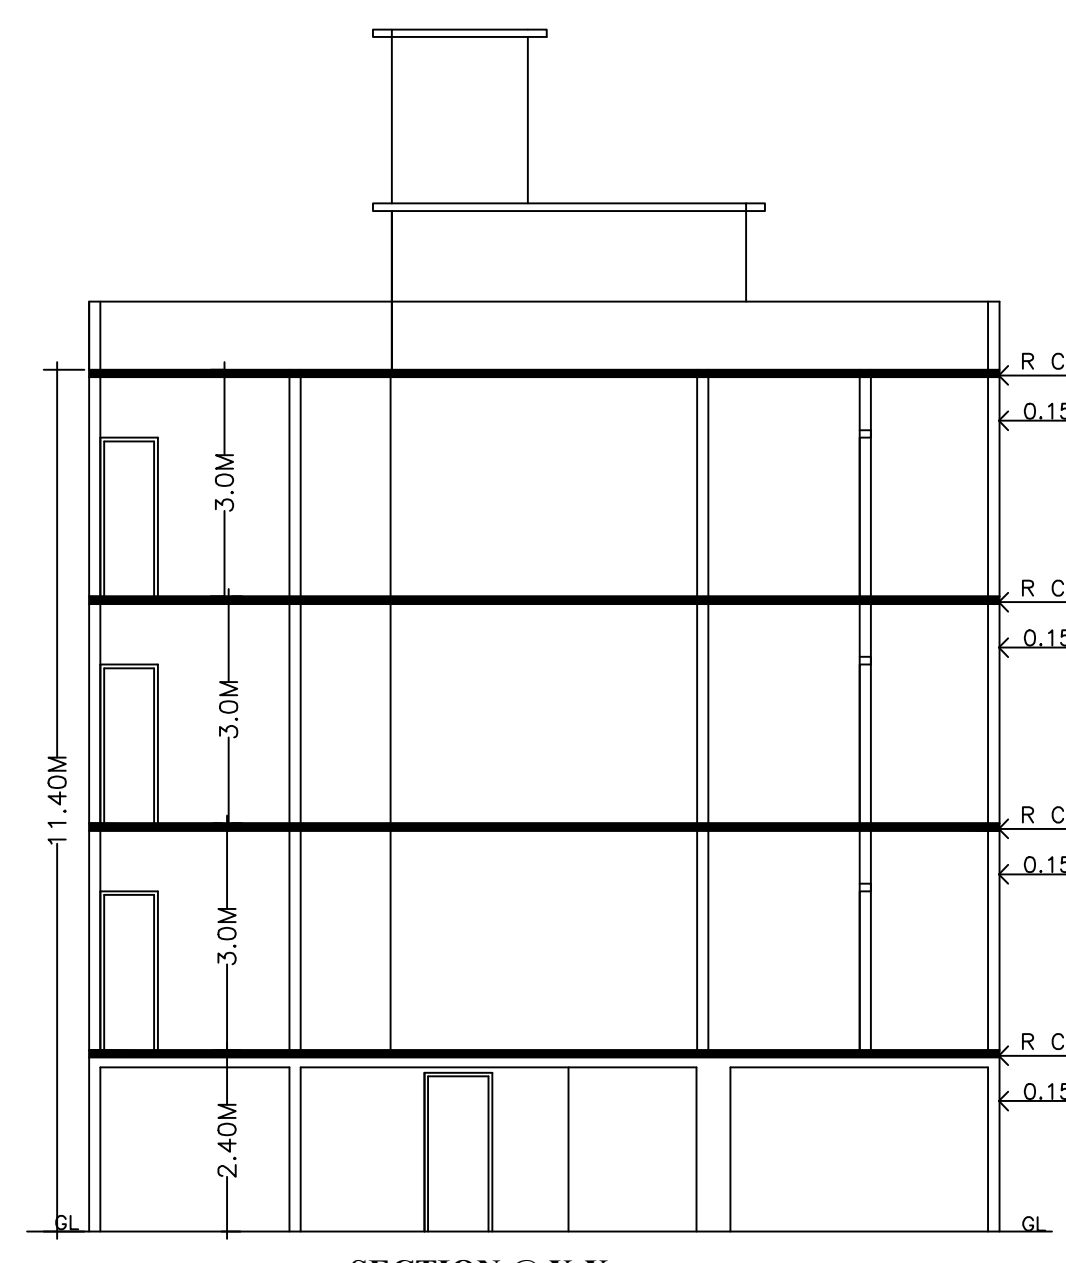

SECTION @ X-X

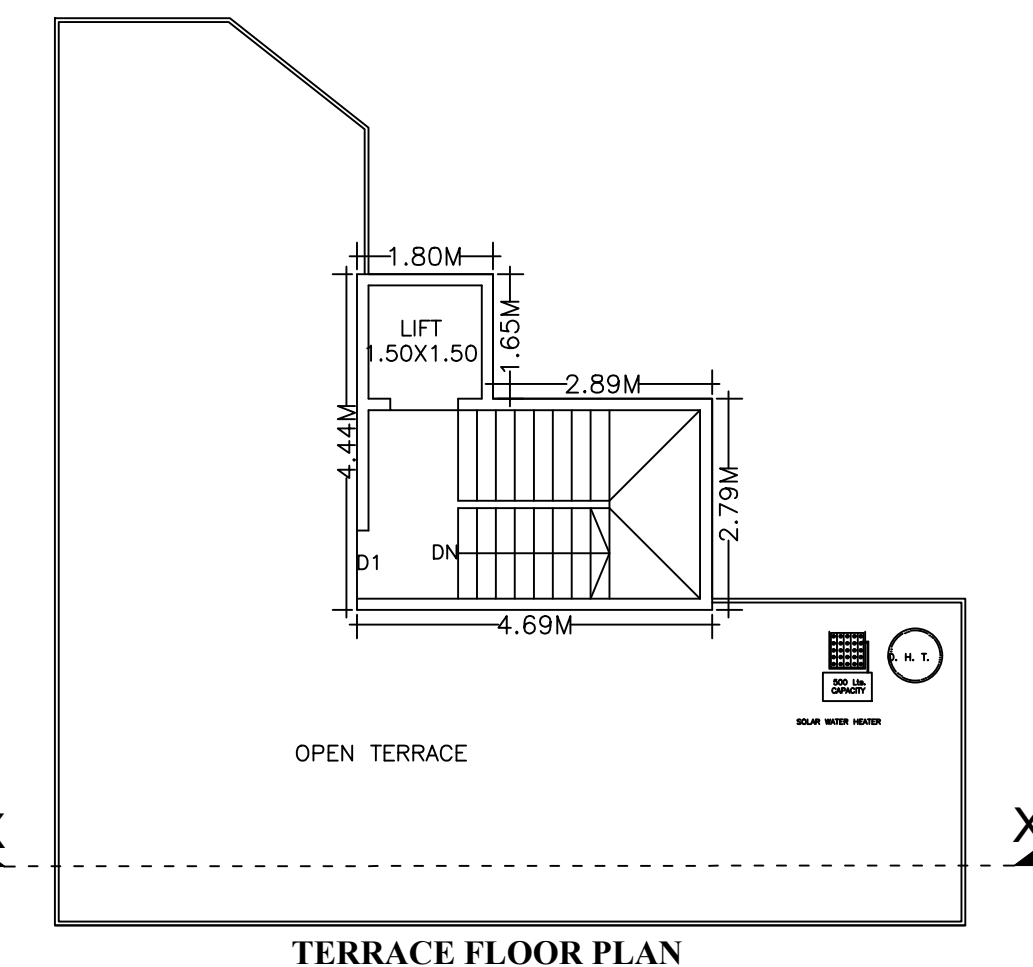

TERRACE FLOOR PLAN

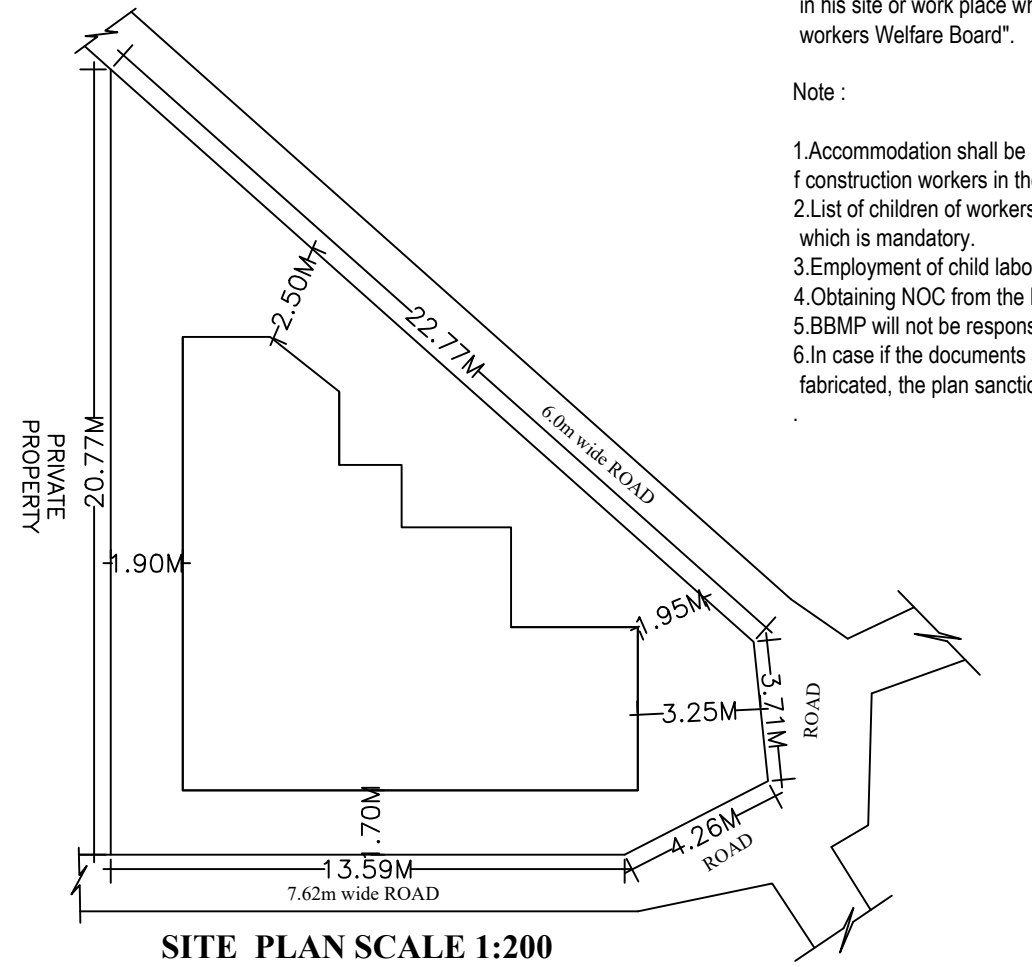

SITE PLAN SCALE 1:200

FAR & Tenement Details

Block	No. of Same Bldg	Total Built Up Area (Sq.mt.)	Deductions (Area in Sq.mt.)				Proposed FAR Area (Sq.mt.)	Total FAR Area (Sq.mt.)	Tnmt (No.)
			StairCase	Lift	Lift Machine	Parking			
AA (BB)	1	407.62	16.09	9.00	2.25	87.09	285.21	293.19	03
Grand Total:	1	407.62	16.09	9.00	2.25	87.09	285.21	293.19	3.00

Required Parking (Table 7a)

Block Name	Type	SubUse	Area (Sq.mt.)	Units		Reqd./Unit		Reqd.	
				Reqd.	Prop.	Reqd./Unit	Reqd.	Prop.	
AA (BB)	Residential	Plotted Resi development	50 - 225	1	-	1	3	-	-
Total :				-	-	-	3	4	-

Parking Check (Table 7b)

Vehicle Type	Reqd.		Achieved	
	No.	Area (Sq.mt.)	No.	Area (Sq.mt.)
Car	3	41.25	4	55.00
Total Car	3	41.25	4	55.00
TwoWheeler	-	13.75	0	0.00
Other Parking	-	-	-	32.09
Total		55.00		87.09

Block :AA (BB)

Floor Name	Total Built Up Area (Sq.mt.)	Deductions (Area in Sq.mt.)				Proposed FAR Area (Sq.mt.)	Total FAR Area (Sq.mt.)	Tnmt (No.)
		StairCase	Lift	Parking	Resi.			
Terrace Floor	18.34	16.09	0.00	2.25	0.00	0.00	0.00	00
Second Floor	97.32	0.00	2.25	0.00	95.07	95.07	01	
First Floor	97.32	0.00	2.25	0.00	95.07	95.07	01	
Ground Floor	97.32	0.00	2.25	0.00	95.07	95.07	01	
Stilt Floor	97.32	0.00	2.25	0.00	87.09	7.98	00	
Total:	407.62	16.09	9.00	2.25	87.09	285.21	293.19	03
Total Number of Same Blocks	1							
Total:	407.62	16.09	9.00	2.25	87.09	285.21	293.19	03

SCHEDULE OF JOINERY:

BLOCK NAME	NAME	LENGTH	HEIGHT	NOS
AA (BB)	V	1.00	1.80	09
AA (BB)	W	1.80	2.10	27

UnitBUA Table for Block :AA (BB)

FLOOR	Name	UnitBUA Type	UnitBUA Area	Carpet Area	No. of Rooms	No. of Tenement
GROUND FLOOR PLAN	GF1	FLAT	75.59	75.59	8	1
TYPICAL - 1& 2 FLOOR PLAN	FF2SF3	FLAT	75.59	75.59	8	2
Total:	-	-	226.77	226.77	24	3

Block USE/SUBUSE Details

Block Name	Block Use	Block SubUse	Block Structure	Block Land Use Category
AA (BB)	Residential	Plotted Resi development	Bldg upto 11.5 mt. Ht.	R

SCHEDULE OF JOINERY:

BLOCK NAME	NAME	LENGTH	HEIGHT	NOS
AA (BB)	D2	0.76	2.10	09
AA (BB)	D1	0.90	2.10	12
AA (BB)	ED	1.05	2.10	03

The plans are approved in accordance with the acceptance for approval by the Assistant Director of town planning (EAST) on date: 10/01/2020 vide lp number: BBMP/Ad.Com./EST/1349/19-20 subject to terms and conditions laid down along with this building plan approval.

Validity of this approval is two years from the date of issue.

ASSISTANT DIRECTOR OF TOWN PLANNING (EAST)

BHRUHAT BENGALURU MAHANAGARA PALIKE

OWNER / GPA HOLDER'S SIGNATURE

OWNER'S ADDRESS WITH ID NUMBER & CONTACT NUMBER :  
1). UZAIR AHMED AVOOR , 2). ZOYA FATHIMA  
SITE NO- 1, NANDI DURGA ROAD EXTN 8th ROAD, JAYAMAHAL, BANGALORE, WARD NO- 63, PID NO- 92-8-1, (OLD WARD NO- 92),

ARCHITECT/ENGINEER /SUPERVISOR 'S SIGNATURE  
MALLU MADHUSUDHAN REDDY #2, LEVEL 2, SB COMPLEX, NEXT TO IYER SCHOOL, HMT MAIN ROAD, MATHIKERE.  
BCC/BL-3.6/E-4003/2014-15

PROJECT TITLE :  
THE PLAN OF THE PROPOSED RESIDENTIAL BUILDING AT SITE NO-1, NANDI DURGA ROAD EXTN 8th ROAD, JAYAMAHAL, BANGALORE, WARD NO- 63, PID NO- 92-8-1, (OLD WARD NO- 92),

DRAWING TITLE : 1932444640-06-01-2020  
02-36-17\$ \_\$ZOYAFATHIMA

SHEET NO : 1