
BEDROOM

BEDROOM

2.55X3.13

1.30X1.60

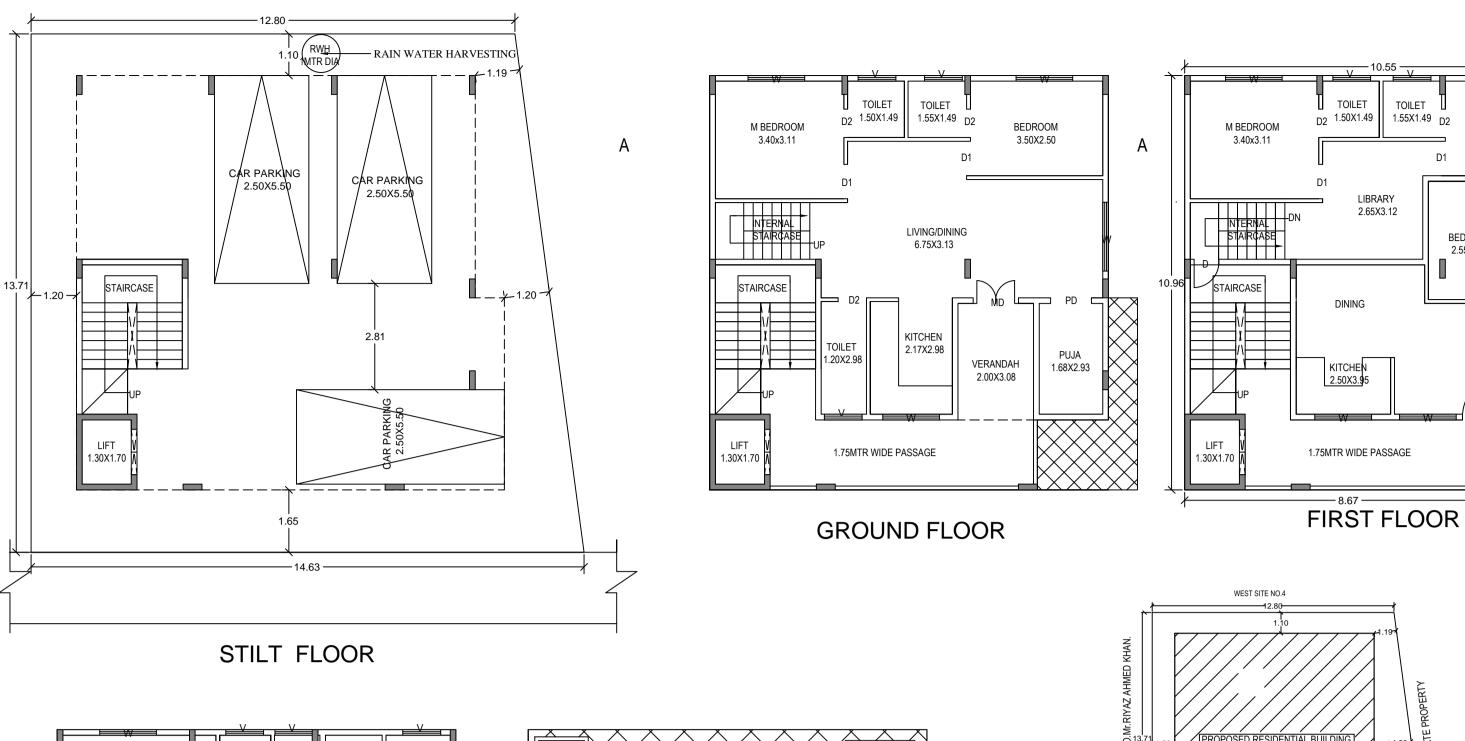


TOILET TOILET D2 1.70X1.20 D2 1.35X1.49 1.20X2.50 BEDROOM 3.30X2.50 KITCHEN/LIVING STAIRCASE KITCHEN/LIVING BEDROOM 2.70X3.00 1.75MTR WIDE PASSAGE 1.30X1.70 SECOND FLOOR TERRACE FLOOR

BEDROOM

4.05X2.50

1.30X1.70

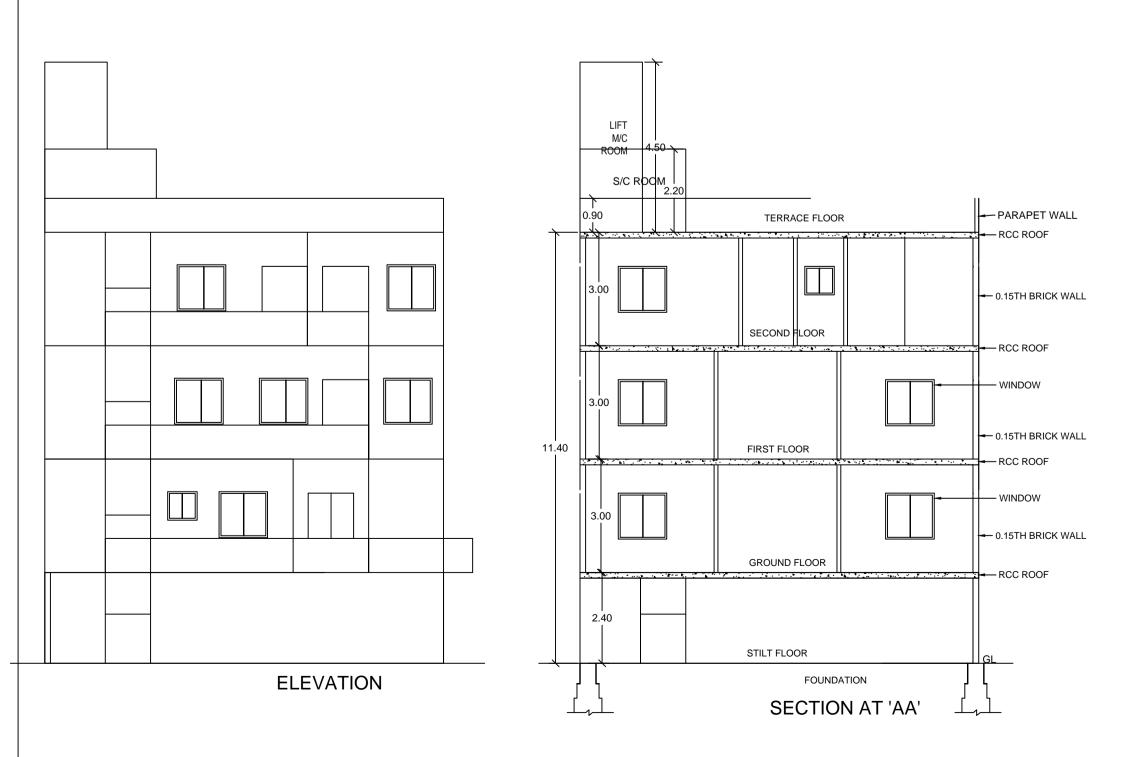

9.0MTR WIDE ROAD SITE PLAN. SCALE.1:200

Block :RESI (AA)

Floor Name	Total Built Up Area (Sq.mt.)	Deductions (Area in Sq.mt.)				Proposed FAR Area (Sq.mt.)	Total FAR Area (Sq.mt.)	Tnmt (No.)
		StairCase	Lift	Lift Machine	Parking	Resi.	(oq.mt.)	
Terrace Floor	20.21	18.00	0.00	2.21	0.00	0.00	0.00	00
Second Floor	112.15	10.47	2.21	0.00	0.00	99.47	99.47	02
First Floor	112.15	14.22	2.21	0.00	0.00	95.72	95.72	01
Ground Floor	112.15	14.22	2.21	0.00	0.00	95.72	95.72	01
Stilt Floor	119.55	10.18	2.21	0.00	107.16	0.00	0.00	00
Total:	476.21	67.09	8.84	2.21	107.16	290.91	290.91	04
Total Number of Same Blocks :	1							
Total:	476.21	67.09	8.84	2.21	107.16	290.91	290.91	04

SCHEDULE OF	JOINERY:			
BLOCK NAME	NAME	LENGTH	HEIGHT	NOS
RESI (AA)	D2	0.75	2.10	09
RESI (AA)	D1	0.91	2.10	10
RESI (AA)	MD	1.20	2.10	05
RESI (AA)	PD	1.20	2.10	01

SCHEDULE OF	JOINERY:			
BLOCK NAME	NAME	LENGTH	HEIGHT	NOS
RESI (AA)	W2	0.90	1.20	01
RESI (AA)	V	1.00	1.50	08
RESI (AA)	W	1.50	1.20	01
RESI (AA)	W	1.80	1.20	14
RESI (AA)	W	1.80	1.50	04
RESI (AA)	W	2.11	1.50	01

UnitBUA Table for Block :RESI (AA)

	- 101 -10011 11	,				
FLOOR	Name	UnitBUA Type	UnitBUA Area	Carpet Area	No. of Rooms	No. of Tenement
GROUND FLOOR PLAN	SPLITTGF	FLAT	126.51	118.03	9	1
FIRST FLOOR PLAN	FF	FLAT	42.33	38.15	4	1
	SPLITTGF	FLAT	0.00	0.00	5	I
SECOND	SF	FLAT	51.83	48.42	5	0
FLOOR PLAN	SF1	FLAT	32.80	29.07	3	2
Total:	-		253.47	233.68	26	4

Block USE/SUBL	ISE Details
Dia al- Massa	

Block Name	Block Use	Block SubUse	Block Structure	Category	
RESI (AA)	Residential	Plotted Resi development	Bldg upto 11.5 mt. Ht.	R	
-		-			

Required Parking(Table 7a)

Block	Type SubUse		Area	Units		Car		
Name	туре	Subose	(Sq.mt.)	Reqd.	Prop.	Reqd./Unit	Reqd.	Prop.
RESI (AA)	Residential	Plotted Resi development	50 - 225	1	-	1	2	-
	Total :		-	-	-	-	2	3

Approval Condition:

This Plan Sanction is issued subject to the following conditions

1.Sanction is accorded for the Residential Building at 33/1A, HENNUR VILLAGE, KASABA HOBLI , BANGALORE, Bangalore.

a).Consist of 1Stilt + 1Ground + 2 only. 2. Sanction is accorded for Residential use only. The use of the building shall not be deviated to any

3.107.16 area reserved for car parking shall not be converted for any other purpose.

4.Development charges towards increasing the capacity of water supply, sanitary and power main has to be paid to BWSSB and BESCOM if any.

5. Necessary ducts for running telephone cables, cubicles at ground level for postal services & space for dumping garbage within the premises shall be provided.

6. The applicant shall INSURE all workmen involved in the construction work against any accident / untoward incidents arising during the time of construction.

7. The applicant shall not stock any building materials / debris on footpath or on roads or on drains. The debris shall be removed and transported to near by dumping yard. 8. The applicant shall maintain during construction such barricading as considered necessary to prevent dust, debris & other materials endangering the safety of people / structures etc. in

& around the site. 9. The applicant shall plant at least two trees in the premises.

10.Permission shall be obtained from forest department for cutting trees before the commencement of the work. 11.License and approved plans shall be posted in a conspicuous place of the licensed premises. The

building license and the copies of sanctioned plans with specifications shall be mounted on a frame and displayed and they shall be made available during inspections. 12.If any owner / builder contravenes the provisions of Building Bye-laws and rules in force, the Architect / Engineer / Supervisor will be informed by the Authority in the first instance, warned in the second instance and cancel the registration if the same is repeated for the third time. 13. Technical personnel, applicant or owner as the case may be shall strictly adhere to the duties and

responsibilities specified in Schedule - IV (Bye-law No. 3.6) under sub section IV-8 (e) to (k). 14. The building shall be constructed under the supervision of a registered structural engineer. 15.On completion of foundation or footings before erection of walls on the foundation and in the case of columnar structure before erecting the columns "COMMENCEMENT CERTIFICATE" shall be obtained. 16.Drinking water supplied by BWSSB should not be used for the construction activity of the building. 17. The applicant shall ensure that the Rain Water Harvesting Structures are provided & maintained in

good repair for storage of water for non potable purposes or recharge of ground water at all times having a minimum total capacity mentioned in the Bye-law 32(a). 18.If any owner / builder contravenes the provisions of Building Bye-laws and rules in force, the authority will inform the same to the concerned registered Architect / Engineers / Supervisor in the first instance, warn in the second instance and cancel the registration of the professional if the same

is repeated for the third time. 19. The Builder / Contractor / Professional responsible for supervision of work shall not shall not materially and structurally deviate the construction from the sanctioned plan, without previous approval of the authority. They shall explain to the owner s about the risk involved in contravention of the provisions of the Act, Rules, Bye-laws, Zoning Regulations, Standing Orders and Policy Orders of

20.In case of any false information, misrepresentation of facts, or pending court cases, the plan sanction is deemed cancelled.

Special Condition as per Labour Department of Government of Karnataka vide ADDENDUM (HosadaagiHoodike) Letter No. LD/95/LET/2013, dated: 01-04-2013 :

1.Registration of

Applicant / Builder / Owner / Contractor and the construction workers working in the construction site with the "Karnataka Building and Other Construction workers Welfare Board"should be strictly adhered to

2. The Applicant / Builder / Owner / Contractor should submit the Registration of establishment and list of construction workers engaged at the time of issue of Commencement Certificate. A copy of the same shall also be submitted to the concerned local Engineer in order to inspect the establishment and ensure the registration of establishment and workers working at construction site or work place. 3. The Applicant / Builder / Owner / Contractor shall also inform the changes if any of the list of workers engaged by him.

4.At any point of time No Applicant / Builder / Owner / Contractor shall engage a construction worker in his site or work place who is not registered with the "Karnataka Building and Other Construction workers Welfare Board".

1.Accommodation shall be provided for setting up of schools for imparting education to the children o f construction workers in the labour camps / construction sites. 2.List of children of workers shall be furnished by the builder / contractor to the Labour Department

which is mandatory. 3. Employment of child labour in the construction activities strictly prohibited.

4. Obtaining NOC from the Labour Department before commencing the construction work is a must. 5.BBMP will not be responsible for any dispute that may arise in respect of property in question. 6.In case if the documents submitted in respect of property in question is found to be false or fabricated, the plan sanctioned stands cancelled automatically and legal action will be initiated.

Parking Check (Table 7b)

Vehicle Type	F	Reqd.	Achieved		
	No.	Area (Sq.mt.)	No.	Area (Sq.mt.)	
Car	2	27.50	3	41.25	
Total Car	2	27.50	3	41.25	
TwoWheeler	-	13.75	0	0.00	
Other Parking	-	-	-	65.91	
Total		41.25		107.1	

FAR &Tenement Details

	ement Detai	10							
No. of Same Up A	Total Built Up Area (Sg.mt.)	D	eductions (Area in Sq.mt.)	Proposed FAR Area (Sq.mt.)	Total FAR Area (Sg.mt.)	Tnmt (No.)		
		(Sq.IIII.)	StairCase	Lift	Lift Machine	Parking	Resi.	(oq.mi.)	
RESI (AA)	1	476.21	67.09	8.84	2.21	107.16	290.91	290.91	04
Grand Total:	1	476.21	67.09	8.84	2.21	107.16	290.91	290.91	4.00

Note: Earlier plan sanction vide L.P No._

is deemed cancelled.

The modified plans are approved in accordance with the acceptance for approval by the Assistant director of town planning (EAST) on date: 07/07/2020 Vide lp number :


BBMP/AD.COM./EST/0163/20-21 subject to terms and

conditions laid down along with this modified building plan approval.

Name : LAKSHMANA
Designation : Assistant Director Town Planning

ASSISTANT DIRECTOR OF TOWN PLANNING (EAST

BHRUHAT BENGALURU MAHANAGARA PALIKE

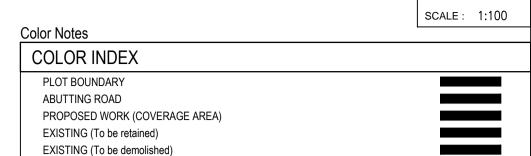


	<u> </u>	
AREA STATEMENT (BBMP)	VERSION NO.: 1.0.13	
	VERSION DATE: 26/06/2020	
PROJECT DETAIL:	·	
Authority: BBMP	Plot Use: Residential	
Inward_No: BBMP/Ad.Com./EST/0163/20-21	Plot SubUse: Plotted Resi development	
Application Type: Suvarna Parvangi	Land Use Zone: Residential (Main)	
Proposal Type: Building Permission	Plot/Sub Plot No.: 33/1A	
Nature of Sanction: NEW	Khata No. (As per Khata Extract): 157/527	
Location: RING-III	Locality / Street of the property: HENNUR BANGALORE	VILLAGE, KASABA HOBLI,
Building Line Specified as per Z.R: NA		
Zone: East		
Ward: Ward-024		
Planning District: 311-Horamavu		
AREA DETAILS:	·	SQ.MT.
AREA OF PLOT (Minimum)	(A)	188.03
NET AREA OF PLOT	(A-Deductions)	188.03
COVERAGE CHECK		
Permissible Coverage area (7	,	141.02
Proposed Coverage Area (63	,	119.54
Achieved Net coverage area		119.54
Balance coverage area left (1	11.42 %)	21.48
FAR CHECK		
Permissible F.A.R. as per zon		329.05
Additional F.A.R within Ring I	and II (for amalgamated plot -)	0.00
Allowable TDR Area (60% of	Perm.FAR)	0.00
Premium FAR for Plot within I	mpact Zone (-)	0.00
Total Perm. FAR area (1.75)		329.05
Residential FAR (100.00%)		290.90
Proposed FAR Area		290.90
Achieved Net FAR Area (1.5	5)	290.90
Balance FAR Area (0.20)		38.15
BUILT UP AREA CHECK		
Proposed BuiltUp Area		476.21
Achieved BuiltUp Area		476.21

Approval Date: 07/07/2020 9:20:28 AM

Payment Details

Sr No. Challan Number	Challan	Receipt	Amount (INR)	Payment Mode	Transaction	Pavment Date	Remark
	Number	Number	Amount (IIVIX)	r ayment would	Number	rayillelii Dale	
1 BBMP/4485/CH/20-21	DDMD/4495/CU/20 24	BBMP/4485/CH/20-21	450	Online	10552606743	06/20/2020	
	DDIVIF/4403/CH/20-21	450	Offillite	10002000740	1:45:33 PM	-	
	No.		Amount (INR)	Remark			
	1	S	450	-			

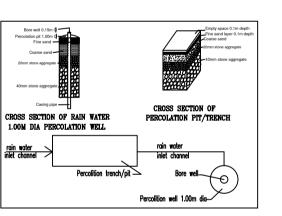

DETAILS OF RAIN WATER HARVESTING STRUCTURES

OWNER / GPA HOLDER'S SIGNATURE

OWNER'S ADDRESS WITH ID NUMBER & CONTACT NUMBER:

1. S. MALLESWARI 2. LOKESH KUMAR. S HENNUR VILLAGE,

KASABA HOBLI

S. Lokesh krumar

S. Malleswain

ARCHITECT/ENGINEER

/SUPERVISOR 'S SIGNATURE

R. Vasanth Madhava No 29, 2nd main road, Tata Silk Fsim,

Basavanagudi./nNo 29, 2nd main road, Tata Silk Fsim

Basavanagudi. BCC/BL-3.6/E:3212.00

PROJECT TITLE:

PLAN SHOING PROPOSED RESIDENTIAL BUILDING AT SITE NO.11, HENNUR VILLAGE, H B R LAYOUT, BANGALORE NORTH TALUK , BANGALORE. WARD NO.24, KHATHA NO.157/527/A/5.

DRAWING TITLE:

1440816935-30-06-2020 01-43-28\$_\$SP 163 PDCR

SHEET NO: 1