

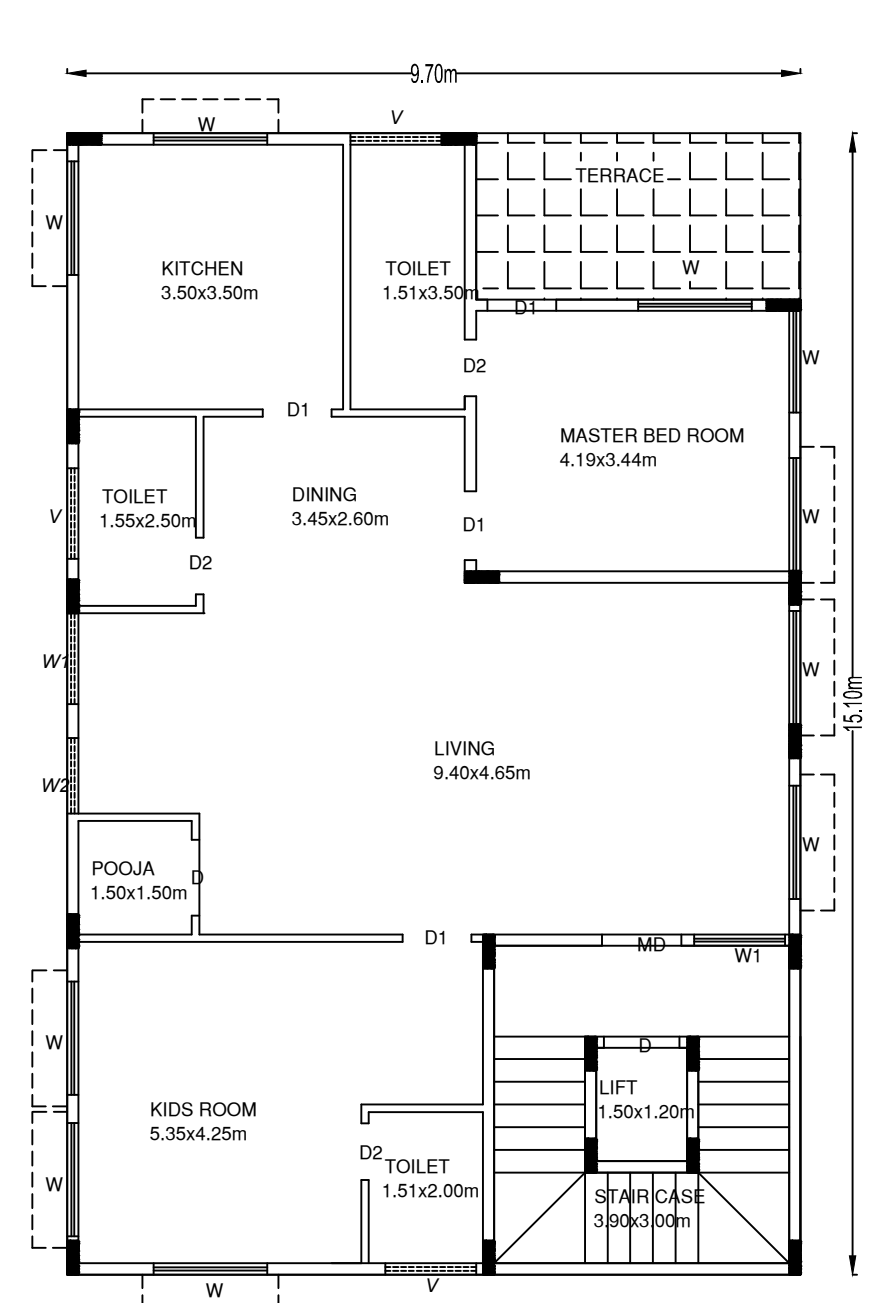



PROPOSED STILT FLOOR PLAN

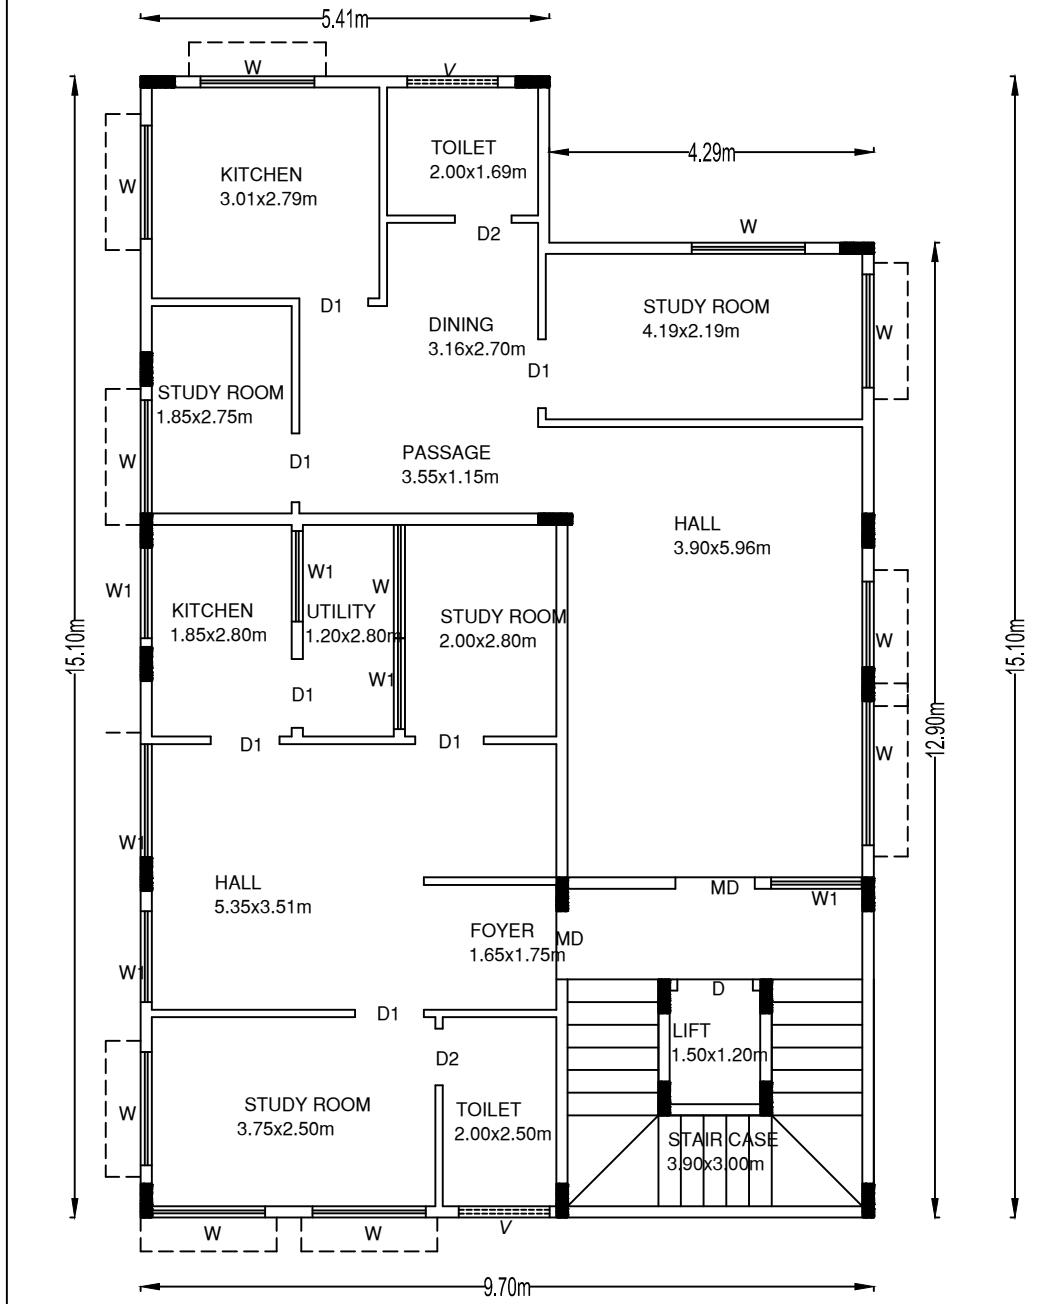


TYPICAL PROPOSED GROUND AND FIRST FLOOR PLAN

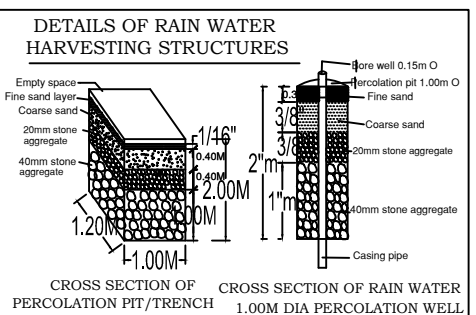

PROPOSED SECOND FLOOR PLAN

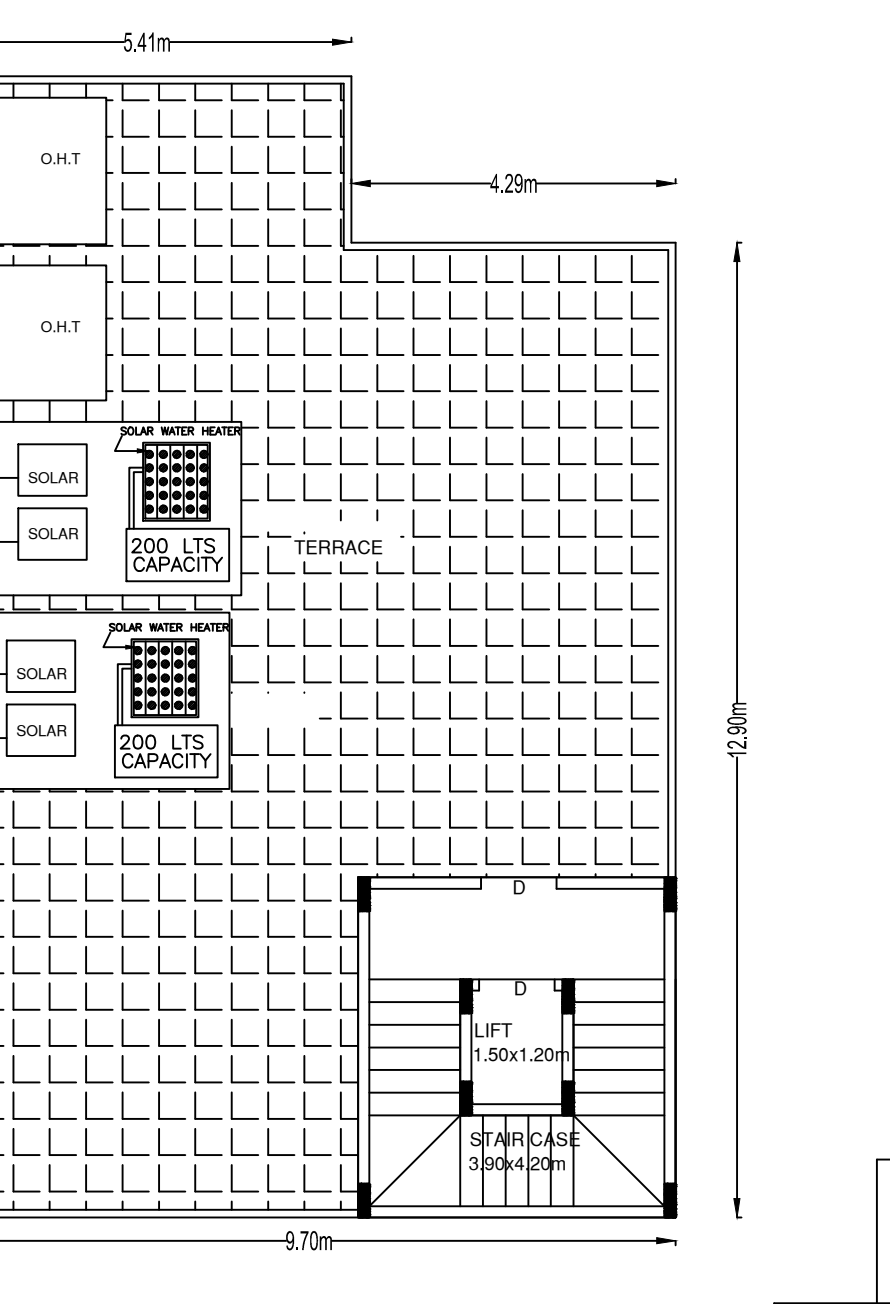

PROPOSED TERRACE FLOOR PLAN

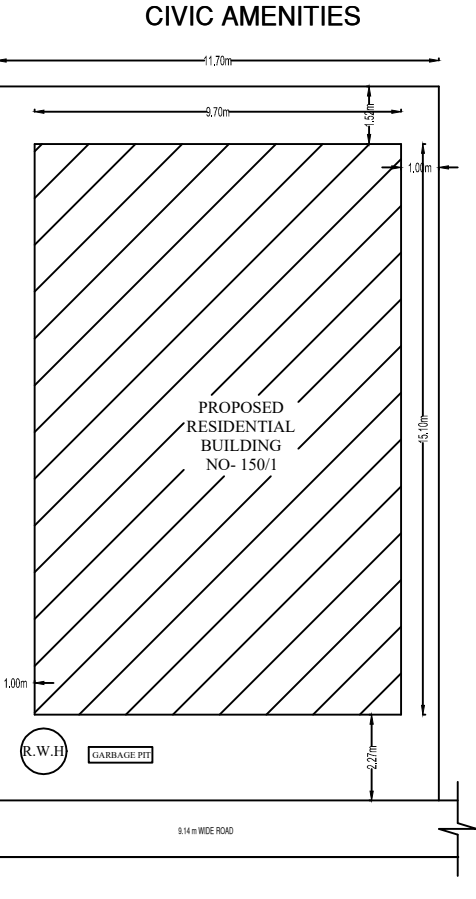

SITE PLAN (SCALE: 1:200)

Block USE/SUBUSE Details

Block Name	Block Use	Block SubUse	Block Structure	Block Land Use Category
A1 (RESIDENTIAL)	Residential	Plotted Resi development	Bldg upto 11.5 m. Ht.	R

Required Parking (Table 7a)


Block Name	Type	SubUse	Area (Sq.mt.)	Units		Car	
				Reqd.	Prop.	Reqd./Unit	Prop.
A1 (RESIDENTIAL)	Residential	Plotted Resi development	50 - Z25	1	-	1	4
Total :				-	-	-	4

Parking Check (Table 7b)


Vehicle Type	Reqd.		Achieved	
	No.	Area (Sq.mt.)	No.	Area (Sq.mt.)
Car	4	55.00	4	55.00
Total Car	4	55.00	4	55.00
TwoWheeler	-	13.75	0	0.00
Other Parking	-	-	-	78.39
Total	-	68.75	-	133.39

FAR & Tenement Details

Block	No. of Same Bldg	Total Built Up Area (Sq.mt.)	Deductions (Area in Sq.mt.)				Proposed FAR Area (Sq.mt.)	Total FAR Area (Sq.mt.)	Trmt (No.)
			StairCase	Lift	Lift Machine	Parking			
A1 (RESIDENTIAL)	1	578.20	73.92	7.20	1.80	133.39	361.89	361.89	04
Grand Total:	1	578.20	73.92	7.20	1.80	133.39	361.89	361.89	4.00

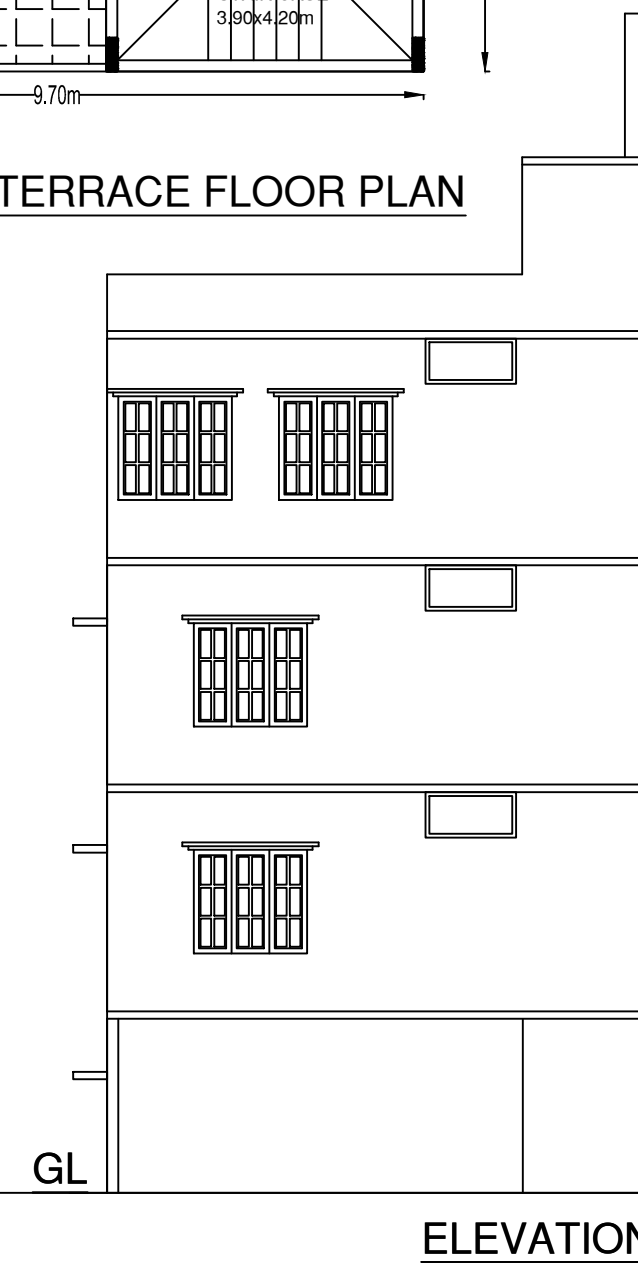

ELEVATION

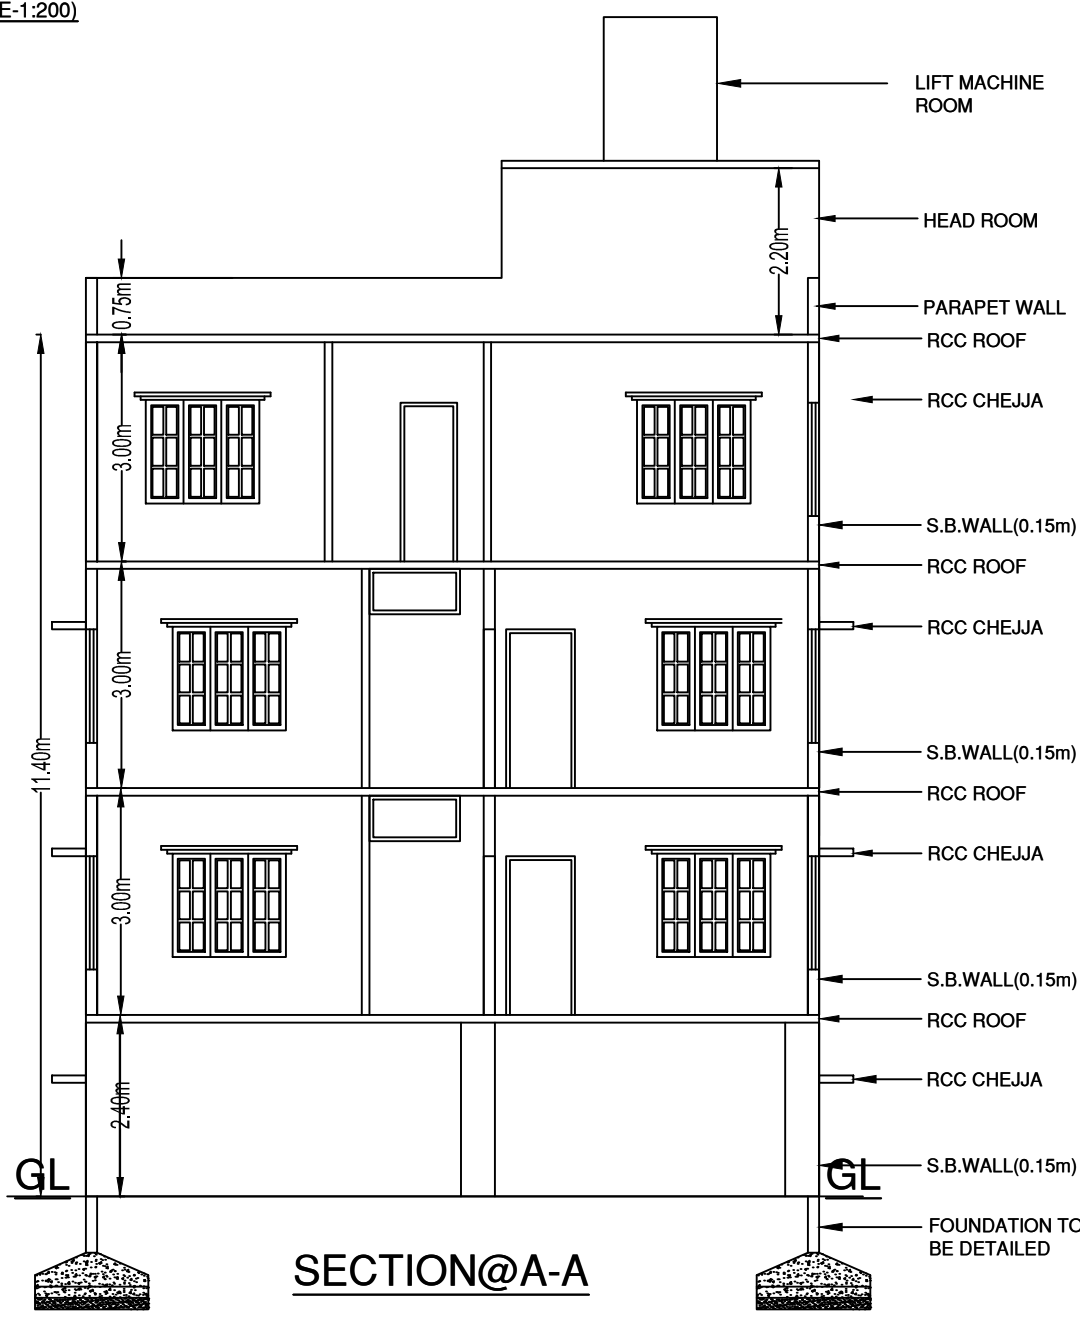

SECTION @ A-A

- Approval Condition :
- This Plan Sanction is issued subject to the following conditions :
- The sanction is accorded for.
 - Consisting of Block - A1 (RESIDENTIAL) Wing - A1-1 (RESIDENTIAL) Consisting of G F, STILT+2UF.
 - The sanction is accorded for Plotted Resi development A1 (RESIDENTIAL) only. The use of the building shall not deviate to any other use.
 - Car Parking reserved in the plan should not be converted for any other purpose.
 - Development charges towards increasing the capacity of water supply, sanitary and power main has to be paid to BWSSB and BESCOM if any.
 - Necessary ducts for running telephone cables, cubicles at ground level for postal services & space for dumping garbage within the premises shall be provided.
 - The applicant shall construct temporary toilets for the use of construction workers and it should be demolished after the construction.
 - The applicant shall INSURE all workmen involved in the construction work against any accident / untoward incidents arising during the time of construction.
 - The applicant shall not stock any building materials / debris on footpath or on roads or on drains. The debris shall be removed and transported to near by dumping yard.
 - The applicant / builder is prohibited from selling the setback area / open spaces and the common facility areas, which shall be accessible to all the tenants and occupants.
 - The applicant shall provide a space for locating the distribution transformers & associated equipment as per K.E.R.C. (E&D) code leaving 3.00 mts. from the building within the premises.
 - The applicant shall provide a separate room preferably 4.50 x 3.65 m in the basement for installation of telecom equipment and also to make provisions for telecom services as per Bye-law No. 25.
 - The applicant shall maintain during construction such barricading as considered necessary to prevent dust, debris & other materials endangering the safety of people / structures etc. in & around the site.
 - Planting shall be obtained from forest department for cutting trees before the commencement of the work.
 - License and approved plans shall be posted in a conspicuous place of the licensed premises. The building license and the copies of sanctioned plans with specifications shall be mounted on a frame and displayed and they shall be made available during inspections.
 - If any owner / builder contravenes the provisions of Building Bye-laws and rules in force, the Architect / Engineer / Supervisor will be informed by the Authority in the first instance, warned in the second instance and cancel the registration if the same is repeated for the third time.
 - Technical personnel, applicant or owner as the case may be shall strictly adhere to the duties and responsibilities specified in Schedule - IV (Bye-law No. 3.6) under sub section IV-8 (e) to (k).
 - The building shall be constructed under the supervision of a registered structural engineer.
 - On completion of foundation or footings before erection of walls on the foundation and in the case of columnar structure before erecting the columns "COMMENCEMENT CERTIFICATE" shall be obtained.
 - Construction or reconstruction of the building should be completed before the expiry of five years from the date of issue of license & within one month after their completion shall apply for permission to occupy the building.
 - The building should not be occupied without obtaining "OCCUPANCY CERTIFICATE" from the competent authority.
 - Drinking water supplied by BWSSB should not be used for the construction activity of the building.
 - The applicant shall ensure that the Rain Water Harvesting Structures are provided & maintained in good repair for storage of water for non potable purposes or recharge of ground water at all times having a minimum total capacity mentioned in the Bye-law 32(a).
 - The building shall be designed and constructed adopting the norms prescribed in National Building Code and in the "Criteria for earthquake resistant design of structures" bearing No. IS 1893-2002 published by the Bureau of Indian Standards making the building resistant to earthquake.
 - The applicant should provide solar water heaters as per table 17 of Bye-law No. 29 for the building.
 - Facilities for physically handicapped persons prescribed in schedule XI (Bye laws - 31) of Building bye-laws 2003 shall be ensured.
 - The applicant shall provide at least one common toilet in the ground floor for the use of the visitors / servants / drivers and security men and also entrance shall be approached through a ramp for the Physically Handicapped persons together with the stepped entry.
 - The Occupancy Certificate will be considered only after ensuring that the provisions of conditions vide Sl. No. 23, 24, 25 & 26 are provided in the building.
 - The applicant shall ensure that no inconvenience is caused to the neighbors in the vicinity of construction and that the construction activities shall stop before 10.00 PM and shall not resume the work earlier than 7.00 AM to avoid hindrance during late hours and early morning hours.
 - Garbage originating from Apartments / Commercial buildings shall be segregated into organic and inorganic waste and should be processed in the Recycling processing unit ----- k.g capacity installed at site for its re-use / disposal (Applicable for Residential units of 20 and above and 2000 Sqm and above built up area for Commercial building).
 - The structures with basements shall be designed for structural stability and safety to ensure for soil stabilization during the course of excavation for basements with safe design for retaining walls and super structure for the safety of the structure as well as neighboring property, public roads and footpaths, and besides ensuring safety of workman and general public by erecting safe barricades.

Block :A1 (RESIDENTIAL)

Floor Name	Total Built Up Area (Sq.mt.)	Deductions (Area in Sq.mt.)				Proposed FAR Area (Sq.mt.)	Total FAR Area (Sq.mt.)	Trmt (No.)
		StairCase	Lift	Lift Machine	Parking			
Terrace Floor	20.70	18.90	0.00	1.80	0.00	0.00	0.00	
Second Floor	137.01	14.58	1.80	0.00	0.00	120.63	120.63	
First Floor	137.01	14.58	1.80	0.00	0.00	120.63	120.63	
Ground Floor	137.01	14.58	1.80	0.00	0.00	120.63	120.63	
Stilt Floor	146.47	11.28	1.80	0.00	133.39	0.00	0.00	
Total:	578.20	73.92	7.20	1.80	133.39	361.89	361.89	
Total Number of Same Blocks :	1	-	-	-	-	-	-	
Total:	578.20	73.92	7.20	1.80	133.39	361.89	361.89	

SCHEDULE OF JOINERY:

BLOCK NAME	NAME	LENGTH	HEIGHT	NOS
A1 (RESIDENTIAL)	D2	0.75	2.10	06
A1 (RESIDENTIAL)	D1	0.91	2.10	14
A1 (RESIDENTIAL)	D2	0.91	2.10	02
A1 (RESIDENTIAL)	D	1.00	2.10	02
A1 (RESIDENTIAL)	MD	1.05	2.10	04

SCHEDULE OF JOINERY:

BLOCK NAME	NAME	LENGTH	HEIGHT	NOS
A1 (RESIDENTIAL)	W2	1.00	1.20	02
A1 (RESIDENTIAL)	V	1.20	1.20	08
A1 (RESIDENTIAL)	W1	1.20	1.20	09
A1 (RESIDENTIAL)	W	1.35	1.20	02
A1 (RESIDENTIAL)	W1	1.49	1.20	01
A1 (RESIDENTIAL)	W	1.50	1.20	27
A1 (RESIDENTIAL)	W	1.51	1.20	01
A1 (RESIDENTIAL)	W	1.99	1.20	01

UnitBUA Table for Block :A1 (RESIDENTIAL)

FLOOR	Name	UnitBUA Type	UnitBUA Area	Carpet Area	No. of Rooms	No. of Tenement
TYPICAL GROUND & FIRST FLOOR PLAN	SPLIT A	FLAT	135.21	127.86	9	2
SECOND FLOOR PLAN	SPLIT B	FLAT	68.35	62.30	7	2
	SPLIT C	FLAT	69.04	63.43	7	2
Total:	-	-	407.82	381.46	32	4

Color Notes

COLOR INDEX	
PLOT BOUNDARY	---
ABUTTING ROAD	---
PROPOSED WORK (COVERAGE AREA)	---
EXISTING (To be retained)	---
EXISTING (To be demolished)	---

AREA STATEMENT (BBMP)

PROJECT DETAIL:	VERSION NO.:	1.0.3
Authority: BBMP	VERSION DATE:	21/01/2021
Inward No: PRJ/0343/21-22	Plot SubUse: Plotted Resi development	
Application Type: Suvarna Parvangi	Land Use Zone: Residential (Main)	
Proposal Type: Building Permission	Plot/Sub Plot No.: 150/1	
Nature of Sanction: NEW	City Survey No.: 150/1	
Location: RING-II	PID No. (As per Khata Extract): 16-3-150	
Building Line Specified as per Z.R. NA	Locality / Street of the property: kamala nagar	
Zone: West		
Ward: Ward-075		
Planning District: 213-Rajaji Nagar		
AREA DETAILS:		SQ.MT.
AREA OF PLOT (Minimum)	(A)	221.01
NET AREA OF PLOT	(A-Deductions)	221.01
COVERAGE CHECK		
Permissible Coverage area (75.00 %)		165.76
Proposed Coverage Area (66.27 %)		146.47
Achieved Net coverage area (66.27 %)		146.47
Balance coverage area left (8.73 %)		19.29
FAR CHECK		
Permissible F.A.R. as per zoning regulation 2015 (1.75)		386.77
Additional F.A.R. within Ring I and II (for amalgamated plot -)		0.00
Allowable TDR Area (60% of Perm.FAR)		0.00
Premium FAR for Plot within Impact Zone (-)		0.00
Total Perm. FAR area (1.75)		386.77
Residential FAR (100.00%)		361.90
Proposed FAR Area		361.90
Achieved Net FAR Area (1.64)		361.90
Balance FAR Area (0.11)		24.87
BUILT UP AREA CHECK		
Proposed BuiltUp Area		578.20
Achieved BuiltUp Area		578.20

Approval Date :

- Registration of Applicant / Builder / Owner / Contractor and the construction workers working in the construction site with the "Karnataka Building and Other Construction workers Welfare Board" should be strictly adhered to.
 - The Applicant / Builder / Owner / Contractor should submit the Registration of establishment and list of construction workers engaged at the time of issue of Commencement Certificate. A copy of the same shall also be submitted to the concerned local Engineer in order to inspect the establishment and ensure the registration of establishment and workers working at construction site or work place.
 - The Applicant / Builder / Owner / Contractor shall also inform the changes if any of the list of workers engaged by him.
 - At any point of time No Applicant / Builder / Owner / Contractor shall engage a construction worker in his site or work place who is not registered with the "Karnataka Building and Other Construction workers Welfare Board".
- Note :
- Accommodation shall be provided for setting up of schools for imparting education to the children of construction workers in the labour camps / construction sites.
 - List of children of workers shall be furnished by the builder / contractor to the Labour Department which is mandatory.
 - Employment of child labour in the construction activities strictly prohibited.
 - Obtaining NOC from the Labour Department before commencing the construction work is a must.
 - BBMP will not be responsible for any dispute that may arise in respect of property in question.
 - In case if the documents submitted in respect of property in question is found to be false or fabricated, the plan sanctioned stands cancelled automatically and legal action will be initiated.

OWNER / GPA HOLDER'S SIGNATURE

OWNER'S ADDRESS WITH ID NUMBER & CONTACT NUMBER : Kavitha S & N Shivakumar #150, 2nd cross, BEML Layout, Basaweshwaranagar, Bangalore

S. Kavitha

ARCHITECT/ENGINEER /SUPERVISOR 'S SIGNATURE

Ajay A.R.No. 664 8th cross sirivaramnava nagara, Andrahalli BCC/B.L-3.6/E-3737/012-13

Ajay A.R.

PROJECT TITLE : PROPOSED RESIDENTIAL BUILDING , SITE NO-150/1,PID-16-3-150, SITUATED AT KAMALA NAGAR, BEL HCBS 1ST STAGE, BANGALORE IN WARD - 16

DRAWING TITLE : 1068706476-09-04-202104-40-555_SKAVITHA S

SHEET NO: 1

SANCTIONING AUTHORITY :

OFFICIAL SIGNATURE	OFFICIAL DESIGNATION

This approval of Building plan/ Modified plan is valid for two years from the date of issue of plan and building licence by the competent authority.

WEST