




BASEMENT FLOOR PLAN

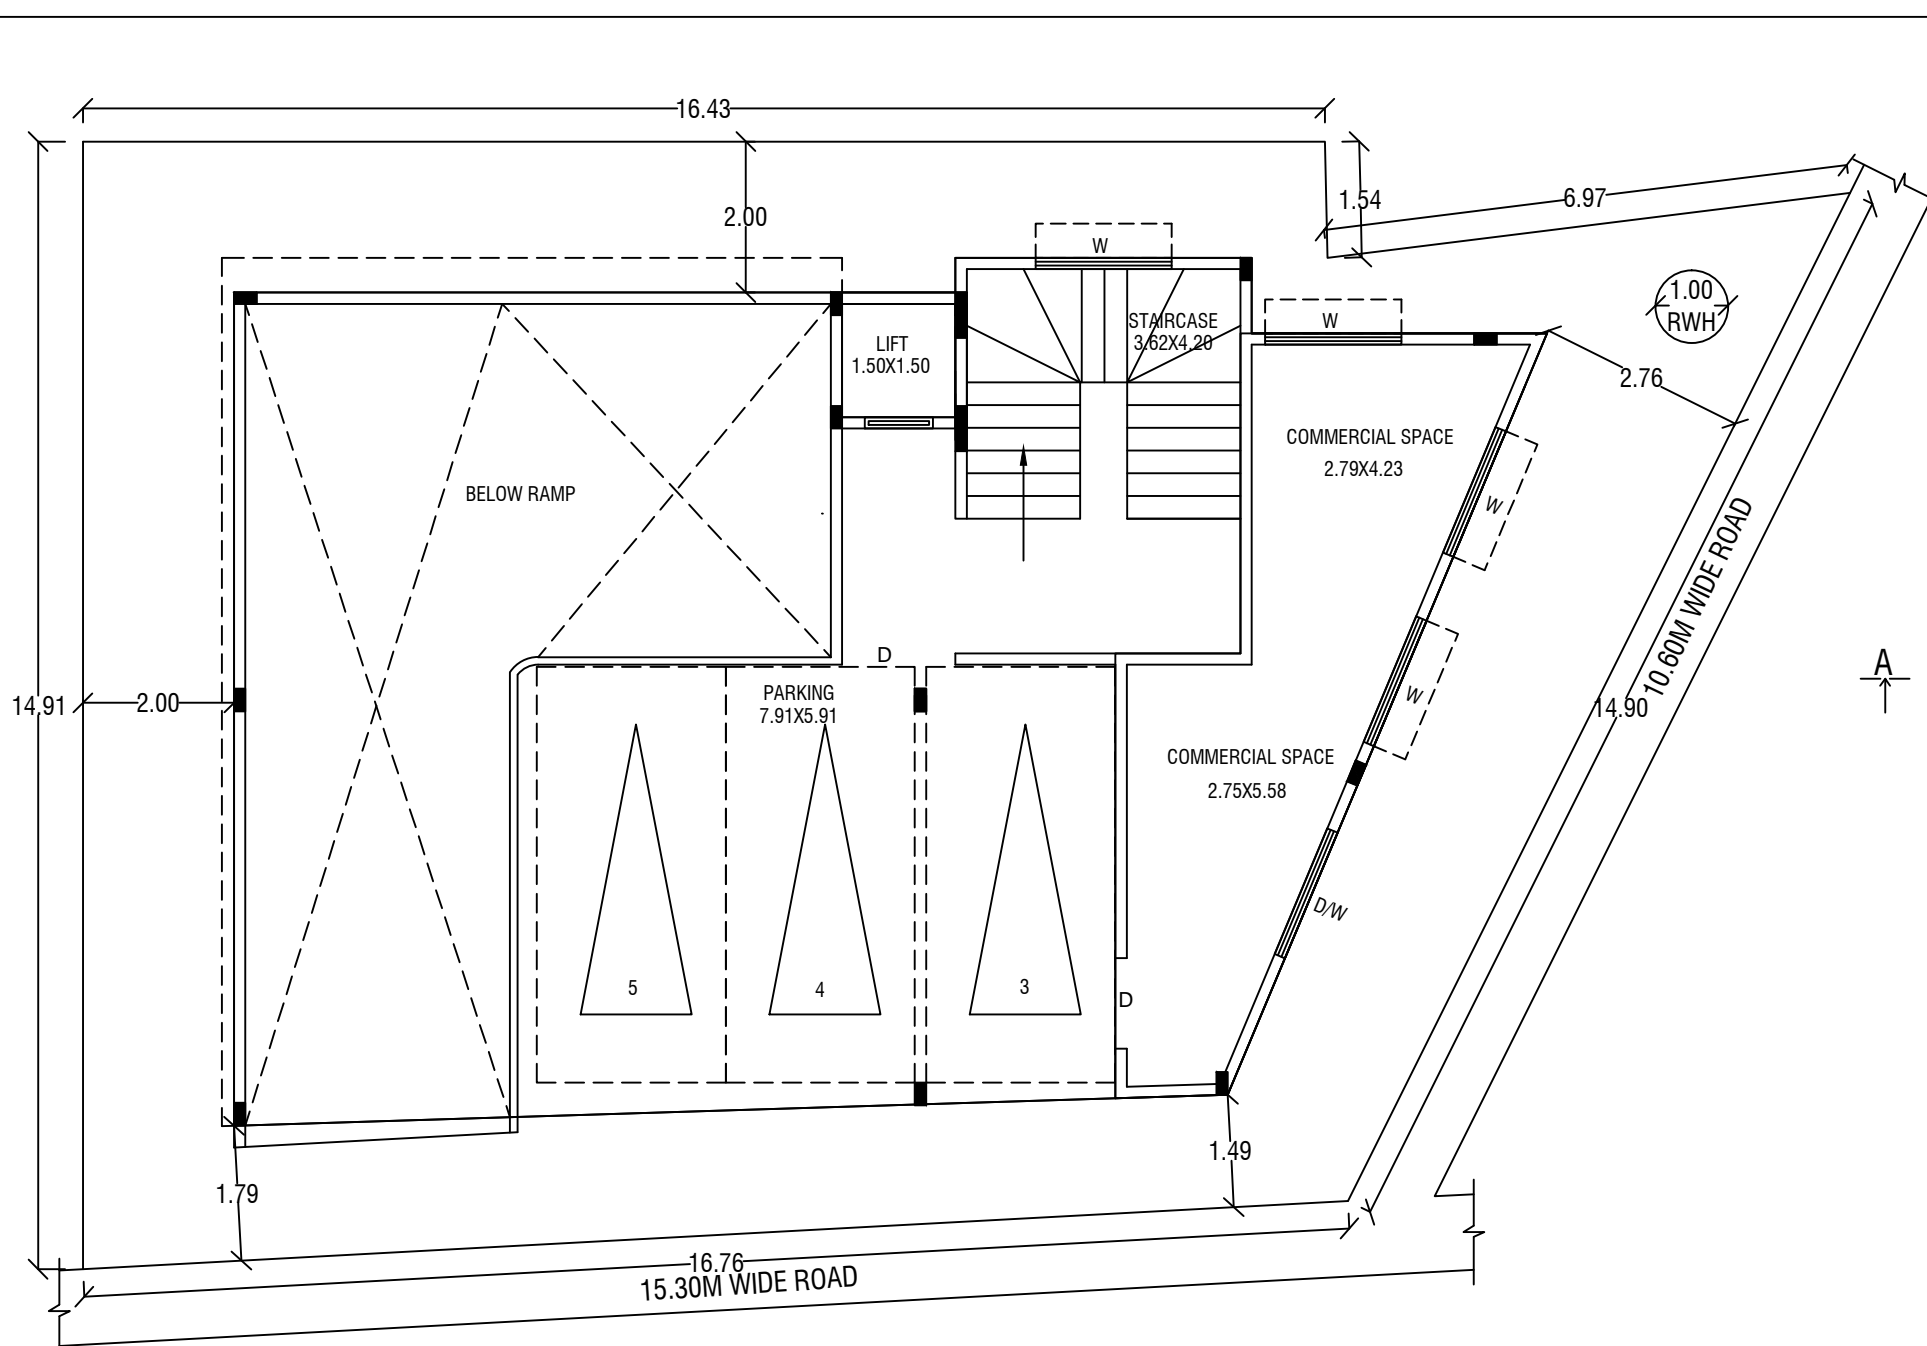


GROUND FLOOR PLAN

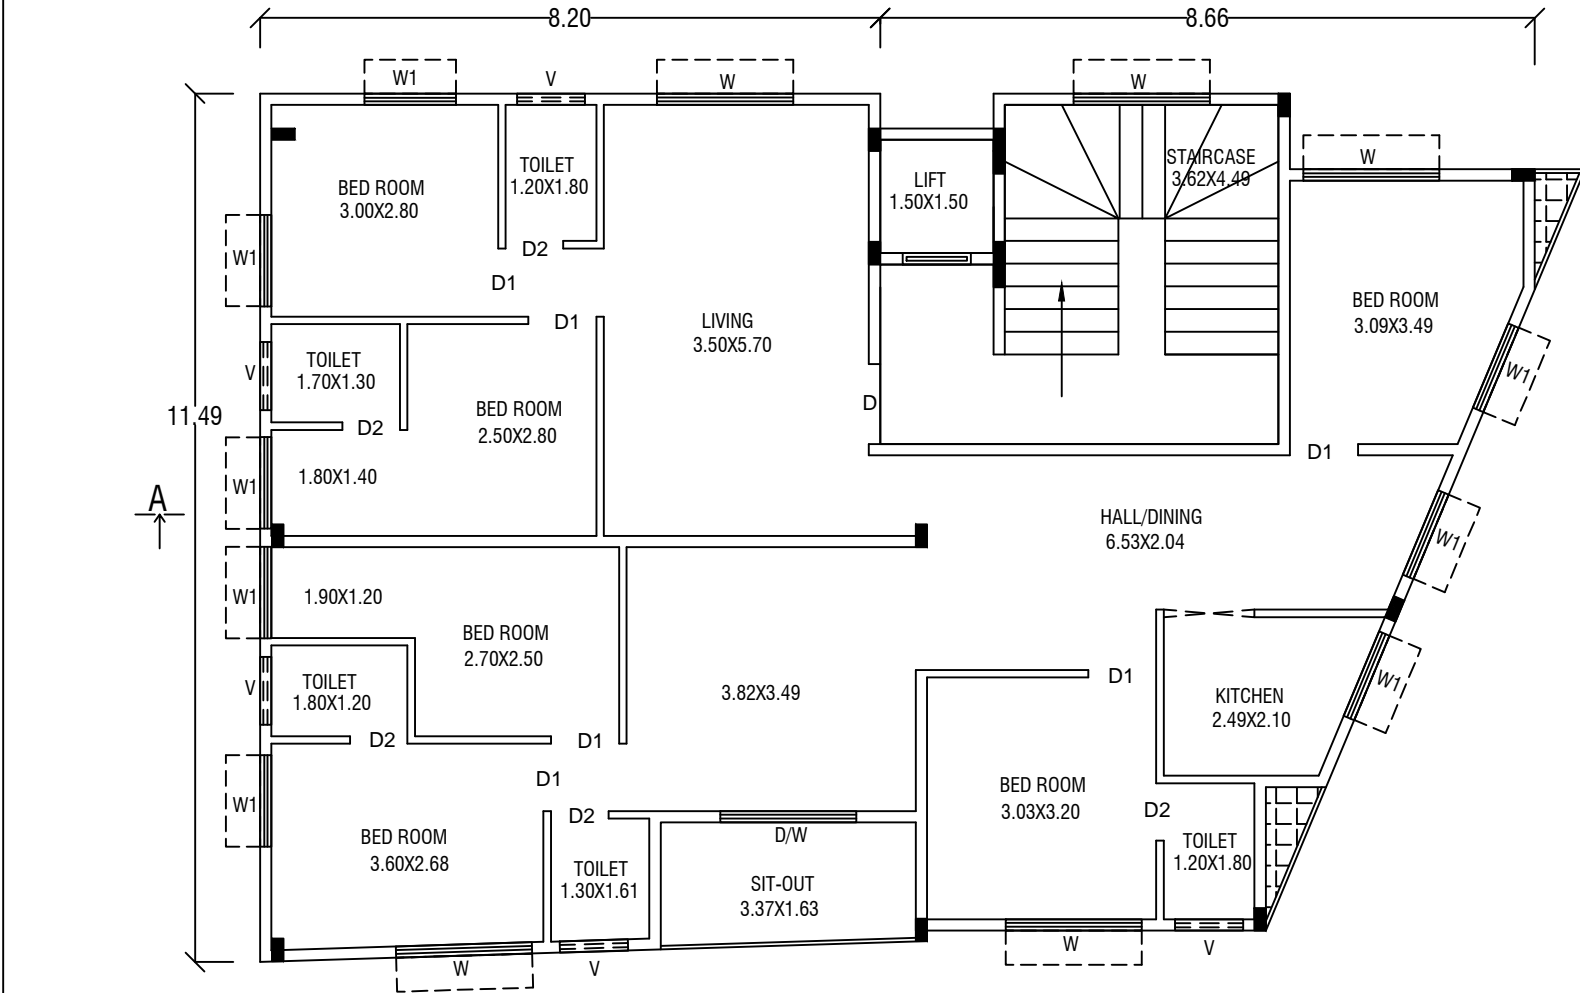


TYPICAL - 1st & 2nd FLOOR PLAN

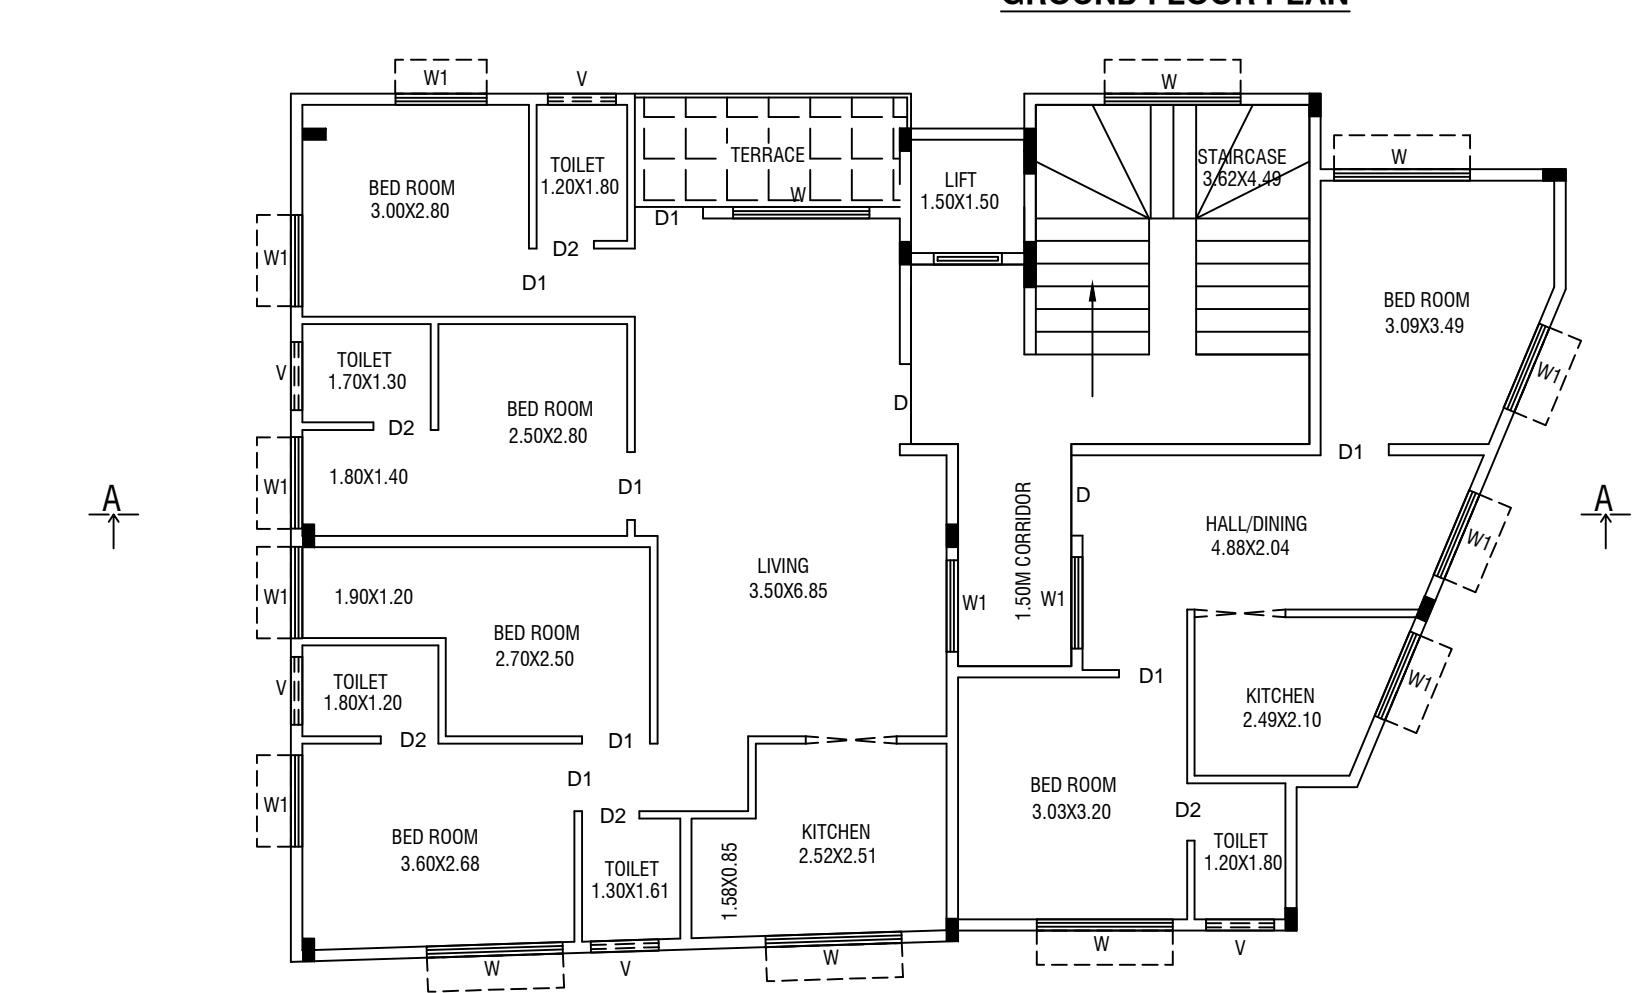


THIRD FLOOR PLAN

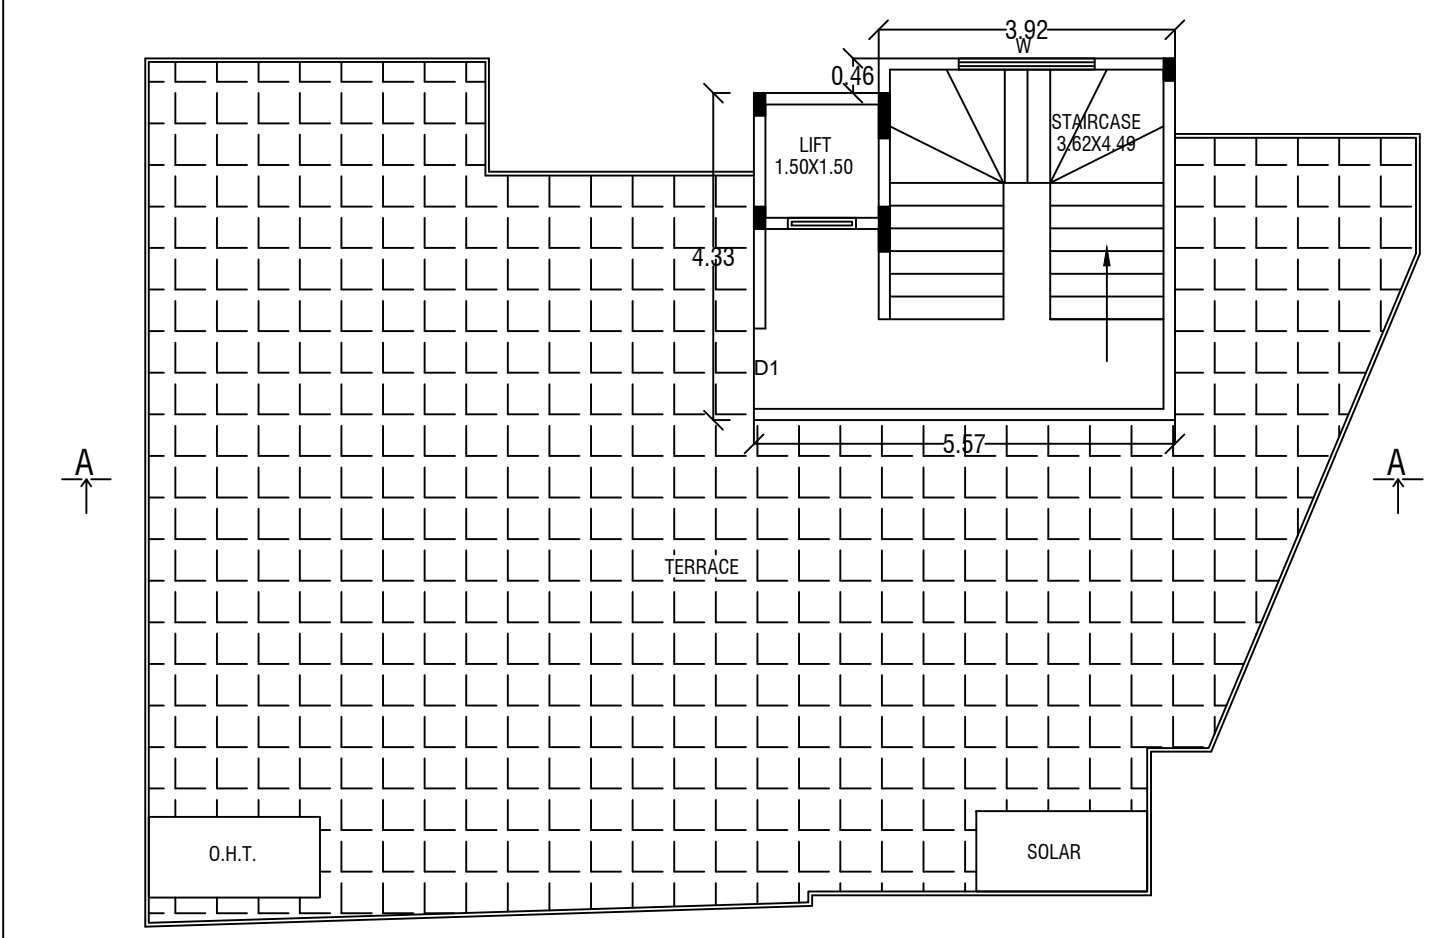


TERRACE FLOOR PLAN

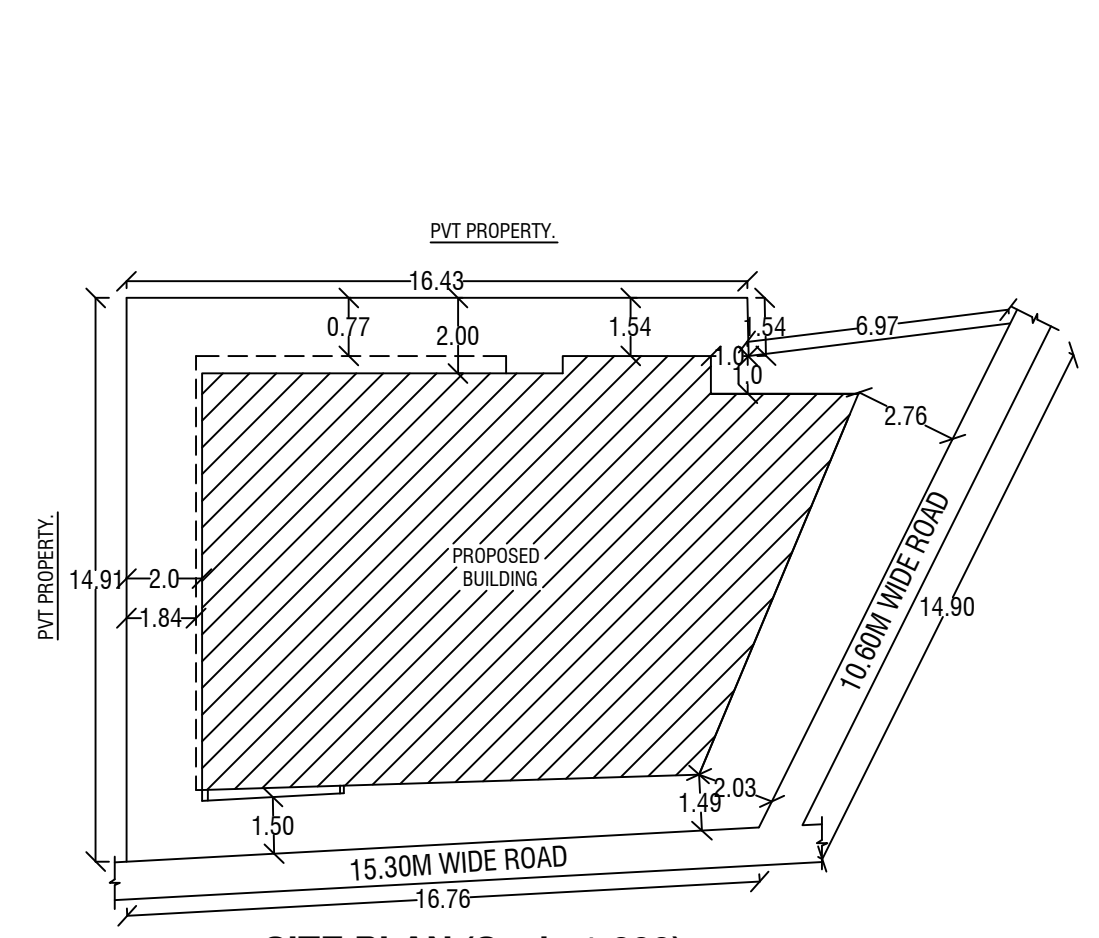

SITE PLAN (Scale 1:200)

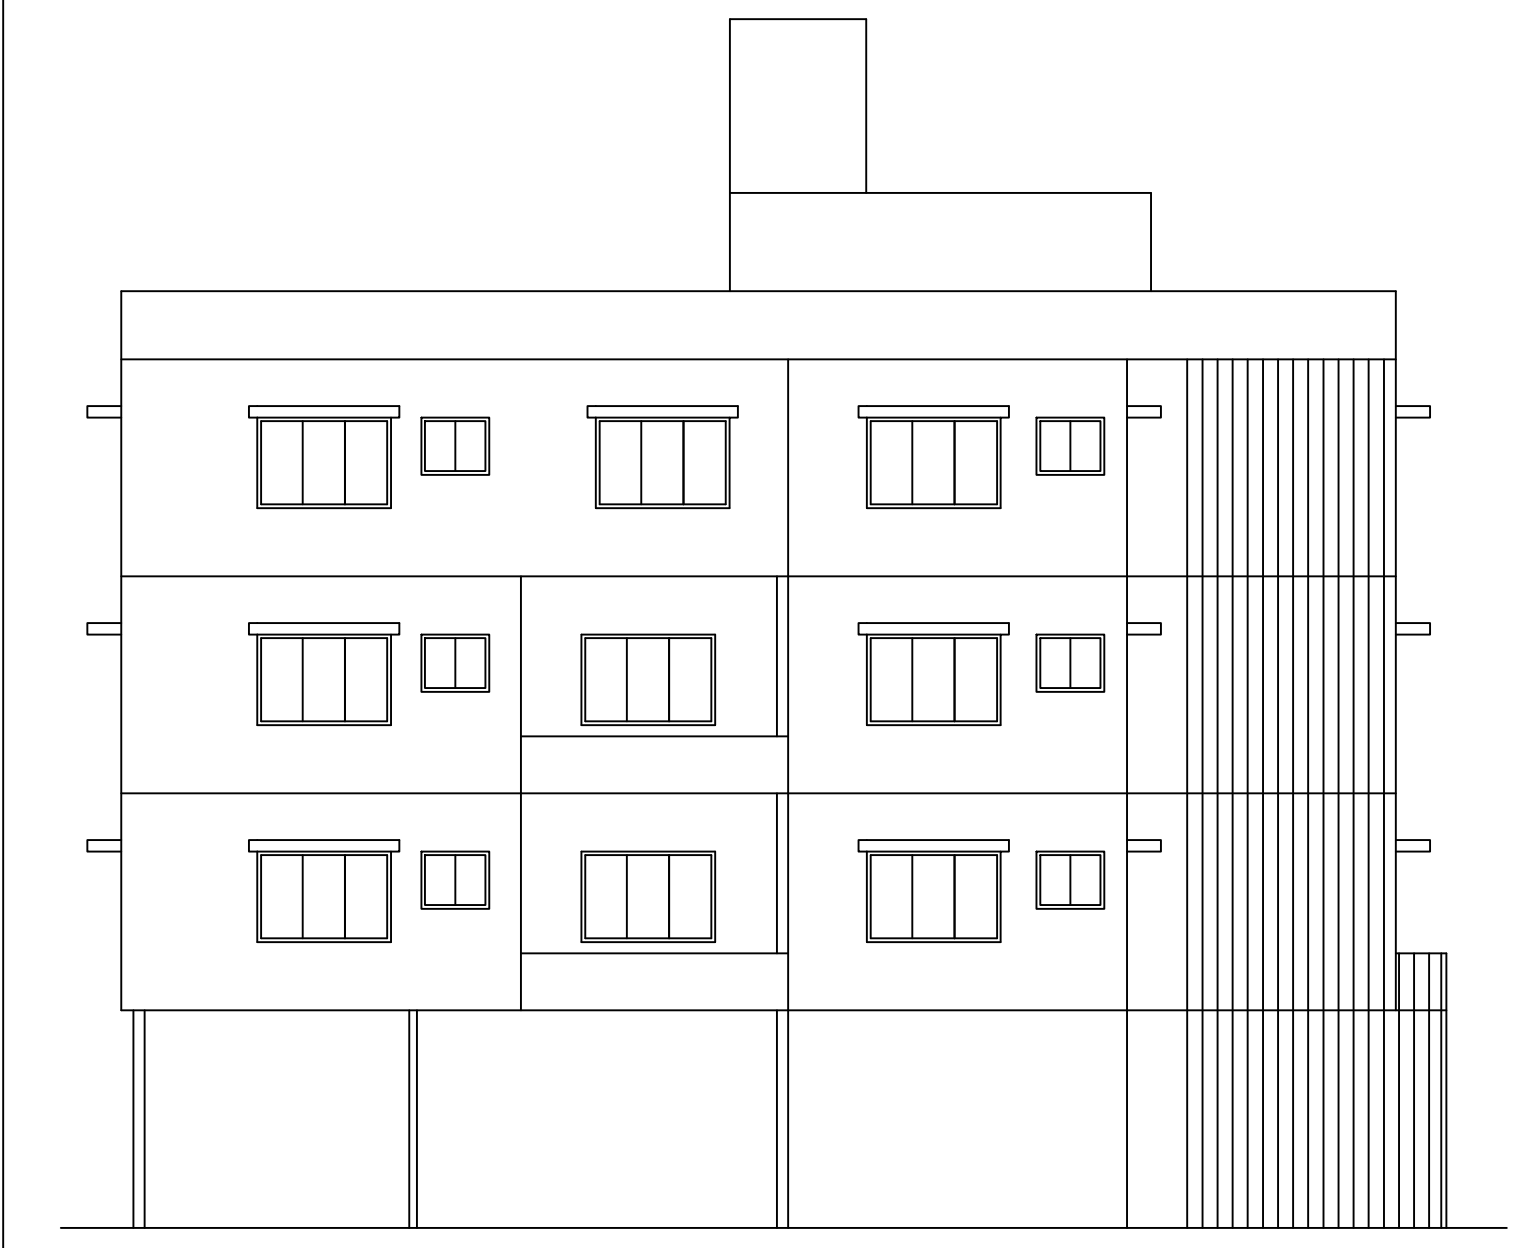

ELEVATION

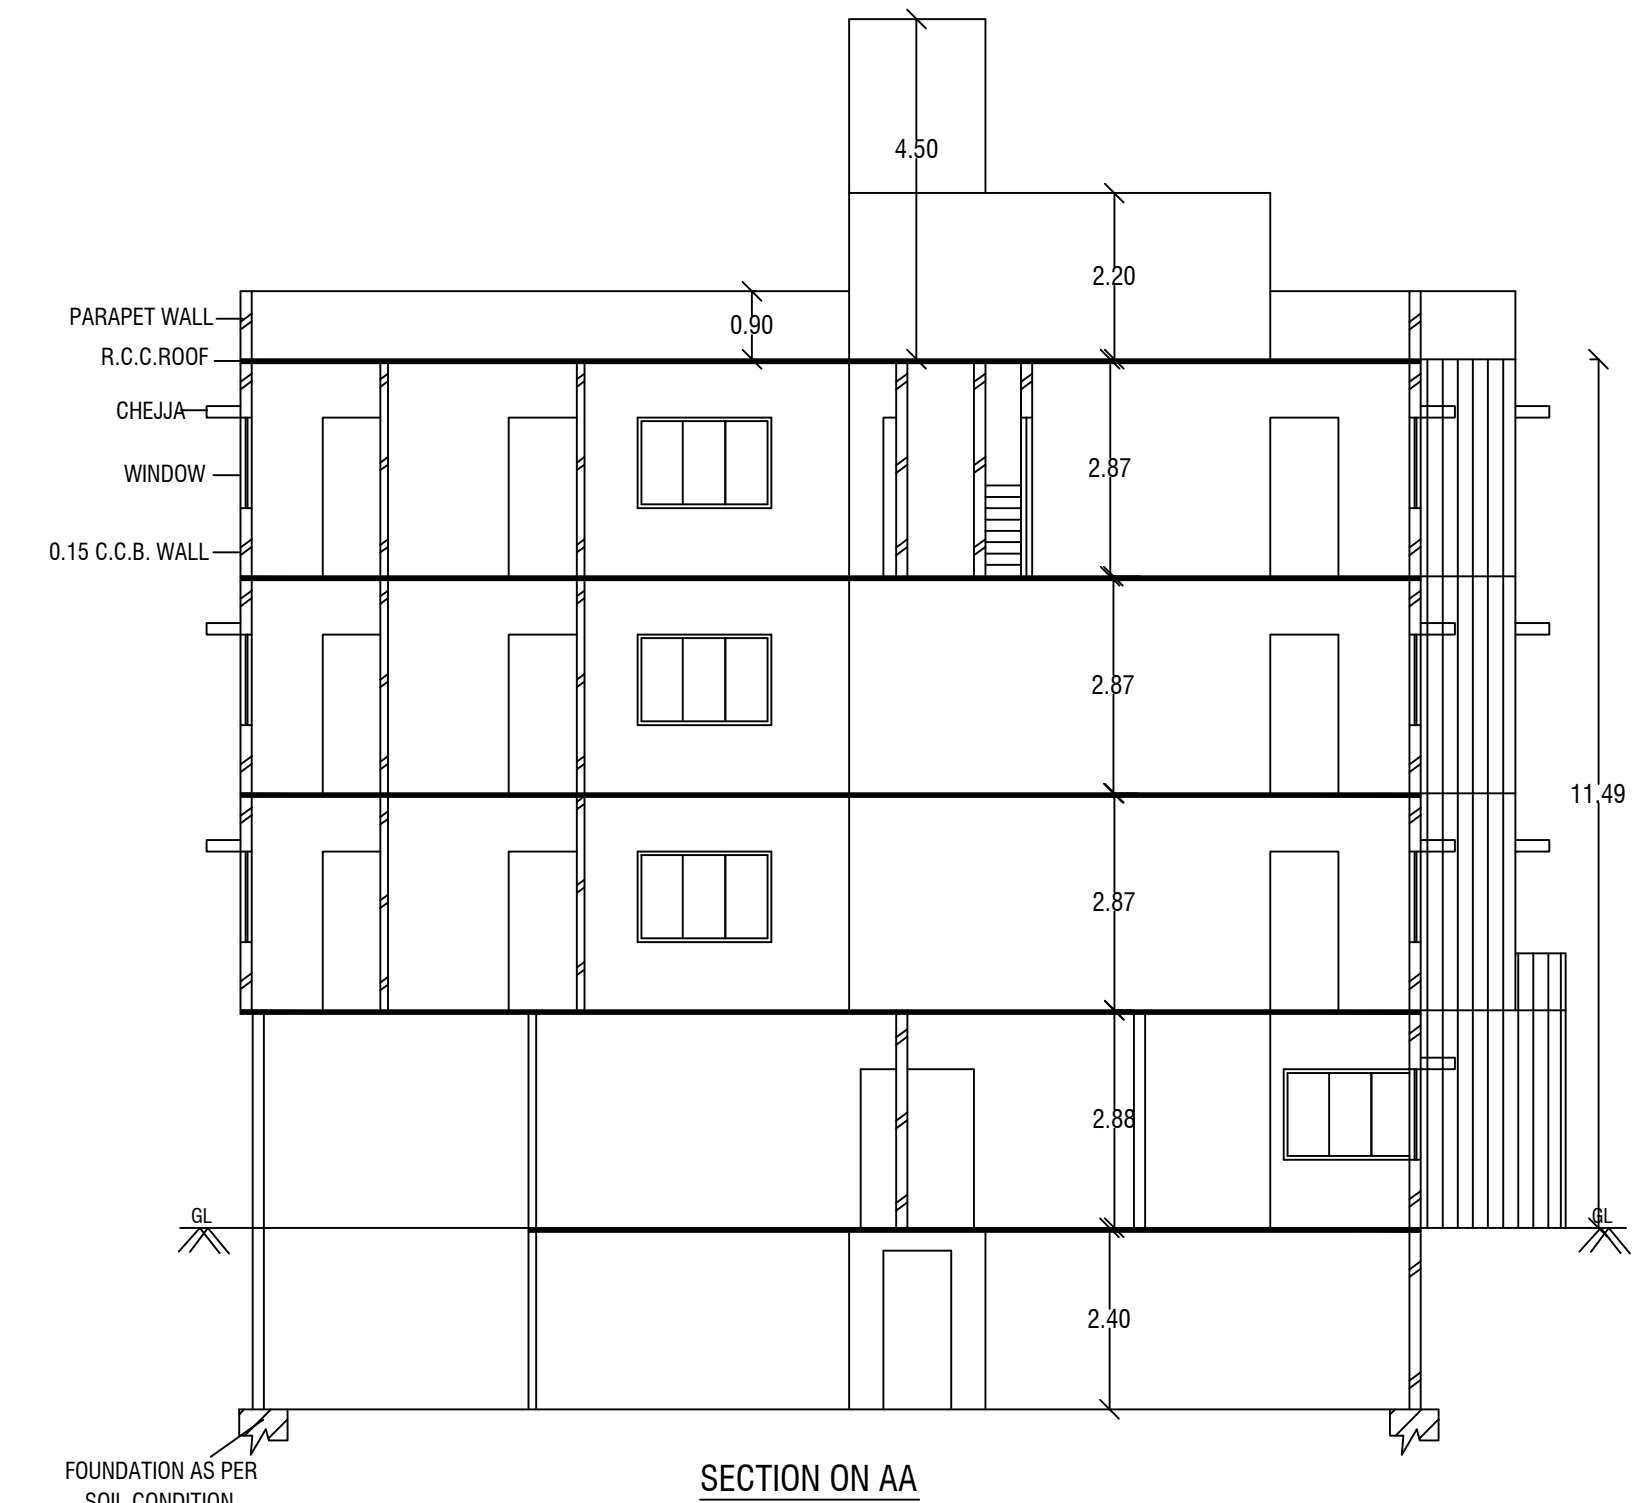

SECTION ON AA

Block A (COMM)

Floor Name	Total Built Up Area (Sq.mt)	Deductions (Area in Sq.mt)						Proposed FAR Area (Sq.mt)		Total FAR Area (Sq.mt)	Trmt (No.)
		StairCase	Lift	Lift Machine	Void	Ramp	Parking	Resi.	Commercial		
Terrace Floor	28.15	25.90	0.00	2.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Third Floor	164.07	0.00	2.25	0.00	24.56	0.00	0.00	137.26	0.00	137.26	02
Second Floor	169.41	0.00	2.25	0.00	20.16	0.00	0.00	147.00	0.00	147.00	01
First Floor	169.41	0.00	2.25	0.00	20.16	0.00	0.00	147.00	0.00	147.00	01
Ground Floor	96.43	0.00	2.25	0.00	0.00	0.00	64.90	0.00	29.28	29.28	00
Basement Floor	233.17	0.00	2.25	0.00	0.00	78.37	152.55	0.00	0.00	0.00	00
Total:	860.65	25.90	11.25	2.25	64.88	78.37	217.46	431.26	29.28	460.54	04

SCHEDULE OF JOINERY:


BLOCK NAME	NAME	LENGTH	HEIGHT	NOS
A (COMM)	D2	0.76	2.10	15
A (COMM)	D1	0.90	2.10	22
A (COMM)	D	1.06	2.10	04
A (COMM)	D	1.20	2.10	01

SCHEDULE OF JOINERY:

BLOCK NAME	NAME	LENGTH	HEIGHT	NOS
A (COMM)	W3	0.90	1.20	15
A (COMM)	W1	1.21	1.20	26
A (COMM)	W	1.80	1.20	24

UnitBUA Table for Block A (COMM)

FLOOR	Name	UnitBUA Type	UnitBUA Area	Carpet Area	No. of Rooms	No. of Tenement
THIRD FLOOR	SPLIT 3	FLAT	91.64	85.91	10	2
THIRD FLOOR	SPLIT 4	FLAT	43.97	39.28	5	2
TYPICAL - 1, 2 FLOOR PLAN	SPLIT 1	FLAT	145.51	136.38	13	2
Total:	-	-	426.64	397.95	41	4

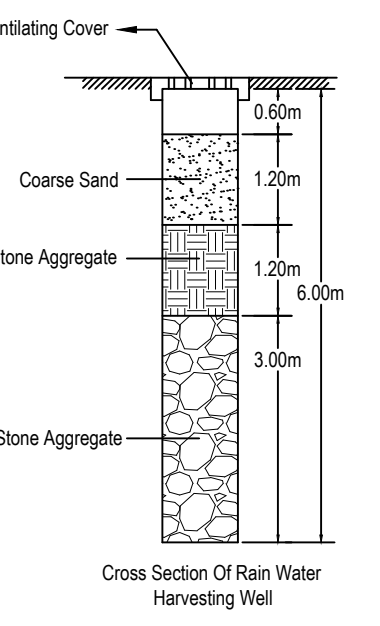

Note: Earlier plan sanction vide L.P No. dated: \_\_\_\_\_ is deemed cancelled. The modified plans are approved in accordance with the acceptance for approval by the Joint Commissioner (EAST) on date: 12/08/2020 vide Ip number: BBMP/AD.COM./EST/0169/20-21 subject to terms and conditions laid down along with this modified building plan approval.

Validity of this approval is two years from the date of issue.

ASSISTANT DIRECTOR OF TOWN PLANNING (EAST)

BHRUHAT BENGALURU MAHANAGARA PALIKE

- Approval Condition :
- This Plan Sanction is issued subject to the following conditions :
- Sanction is accorded for the Commercial Building at 23, NEW BAMBOO BAZAR ROAD, PULAKESHINAGAR, BANGALORE, Bangalore.
  - Consist of 1 Basement + 1 Ground + 3 only.
  - Sanction is accorded for Commercial use only. The use of the building shall not be deviated to any other use.
  - 27.15 area reserved for car parking shall not be converted for any other purpose.
  - Development charges towards increasing the capacity of water supply, sanitary and power main has to be paid to BWSSB and BESCOM if any.
  - Necessary ducts for running telephone cables, cubicles at ground level for postal services & space for dumping garbage within the premises shall be provided.
  - The applicant shall INSURE all workmen involved in the construction work against any accident / untoward incidents arising during the time of construction.
  - The applicant shall not stock any building materials / debris on footpath or on roads or on drains. The debris shall be removed and transported to near by dumping yard.
  - The applicant shall maintain during construction such barricading as considered necessary to prevent dust, debris & other materials endangering the safety of people / structures etc. in & around the site.
  - Permission shall be obtained from forest department for cutting trees before the commencement of the work.
  - License and approved plans shall be posted in a conspicuous place of the licensed premises. The building license and the copies of sanctioned plans with specifications shall be mounted on a frame and displayed and they shall be made available during inspections.
  - If any owner / builder contravenes the provisions of Building Bye-laws and rules in force, the Architect / Engineer / Supervisor will be informed by the Authority in the first instance, warned in the second instance and cancel the registration if the same is repeated for the third time.
  - Technical personnel, applicant or owner as the case may be shall strictly adhere to the duties and responsibilities specified in Schedule - IV (Bye-law No. 3.6) under sub section IV-5 (a) to (k).
  - The building shall be constructed under the supervision of a registered structural engineer.
  - On completion of foundation or footings before erection of walls on the foundation and in the case of columnar structure before erecting the columns "OCCUPANCY CERTIFICATE" shall be obtained.
  - The building should not be occupied without obtaining "OCCUPANCY CERTIFICATE" from the competent authority.
  - Drinking water supplied by BWSSB should not be used for the construction activity of the building.
  - The applicant shall ensure that the Rain Water Harvesting Structures are provided & maintained in good repair for storage of water for non potable purposes or recharge of ground water at all times having a minimum total capacity mentioned in the Bye-law 32(a).
  - If any owner / builder contravenes the provisions of Building Bye-laws and rules in force, the authority will inform the same to the concerned registered Architect / Engineers / Supervisor in the first instance, warn in the second instance and cancel the registration of the professional if the same is repeated for the third time.
  - The Builder / Contractor / Professional responsible for supervision of work shall not shall not materially and structurally deviate the construction from the sanctioned plan, without previous approval of the authority. They shall explain to the owner about the risk involved in contravention of the provisions of the Act, Rules, Bye-laws, Zoning Regulations, Standing Orders and Policy Orders of the BBMP.
  - In case of any false information, misrepresentation of facts, or pending court cases, the plan sanction is deemed cancelled.

Special Condition as per Labour Department of Government of Karnataka vide ADDENDUM (Hosadaagihookke) Letter No. LD/95/LET/2013, dated: 01-04-2013 :

- Registration of Applicant / Builder / Owner / Contractor and the construction workers working in the construction site with the "Karnataka Building and Other Construction workers Welfare Board" should be strictly adhered to.
  - The Applicant / Builder / Owner / Contractor should submit the Registration of establishment and list of construction workers engaged at the time of issue of Commencement Certificate. A copy of the same shall also be submitted to the concerned local Engineer in order to inspect the establishment and ensure the registration of establishment and workers working at construction site or work place.
  - The Applicant / Builder / Owner / Contractor shall also inform the changes if any of the list of workers engaged by him.
- At any point of time No Applicant / Builder / Owner / Contractor shall engage a construction worker in his site or work place who is not registered with the "Karnataka Building and Other Construction workers Welfare Board".

- Note :
- Accommodation shall be provided for setting up of schools for imparting education to the children of construction workers in the labour camps / construction sites.
  - List of children of workers shall be furnished by the builder / contractor to the Labour Department which is mandatory.
  - Employment of child labour in the construction activities strictly prohibited.
  - Obtaining NOC from the Labour Department before commencing the construction work is a must.
  - BBMP will not be responsible for any dispute that may arise in respect of property in question.
  - In case if the documents submitted in respect of property in question is found to be false or fabricated, the plan sanctioned stands cancelled automatically and legal action will be initiated.

Color Index

Color	Description
Red	Plot Boundary
Blue	Abutting Road
Green	Proposed Work (Coverage Area)
Yellow	Existing (To be retained)
Black	Existing (To be demolished)

AREA STATEMENT (BBMP)

Project Detail	Version No.	Version Date
Authority: BBMP	1.0.13	26/06/2020
Inward No: BBMP/Ad.Com./EST/0169/20-21	Plot Use: Residential	
Application Type: General	Plot Sub/Use: Small Shop	
Proposal Type: Building Permission	Land Use Zone: Residential (Main)	
Nature of Sanction: NEW	Plot/Sub Plot No.: 23	
Location: RING-II	Khata No.: (As per Khata Extract): 23	
	Locality / Street of the property: NEW BAMBOO BAZAR ROAD, PULAKESHINAGAR, BANGALORE.	
Building Line Specified as per Z.R. NA		
Zone: East		
Ward: Ward-078		
Planning District: 204-Benson Town		
AREA DETAILS:		SQ.MT.
AREA OF PLOT (Minimum)	(A)	263.19
NET AREA OF PLOT	(A-Deductions)	263.19
COVERAGE CHECK		
Permissible Coverage Area (75.00 %)		197.39
Proposed Coverage Area (36.64 %)		96.44
Achieved Net Coverage Area (36.64 %)		96.44
Balance coverage area left (38.36 %)		100.95
FAR CHECK		
Permissible F.A.R. as per zoning regulation 2015 ( 1.75 )		460.58
Additional F.A.R within Ring I and II (for amalgamated plot -)		0.00
Allowable TDR Area (60% of Perm.FAR)		0.00
Premium FAR for Plot within Impact Zone (-)		0.00
Total Perm. FAR Area ( 1.75 )		460.58
Residential FAR (93.64%)		431.25
Commercial FAR (6.36%)		29.28
Proposed FAR Area		460.54
Achieved Net FAR Area ( 1.75 )		460.54
Balance FAR Area ( 0.00 )		0.04
BUILT UP AREA CHECK		
Proposed BuiltUp Area		860.65
Achieved BuiltUp Area		860.64

Approval Date : 08/12/2020 11:58:30 AM

Payment Details

Sr No.	Challan Number	Receipt Number	Amount (INR)	Payment Mode	Transaction Number	Payment Date	Remark
1	BBMP/4637/CH/20-21	BBMP/4637/CH/20-21	4992	Online	109881781243	06/22/2020 3:51:30 PM	-
	No.	Head	Amount (INR)	Remark			
	1	Scrutiny Fee	4992	-			

Block USE/SUBUSE Details

Block Name	Block Use	Block SubUse	Block Structure	Block Land Use Category
A (COMM)	Commercial	Small Shop	Bldg upto 11.5 m. Ht.	C1

Required Parking (Table 7a)

Block Name	Type	SubUse	Area (Sq.mt)	Units		Car	
				Reqd.	Prop.	Reqd./Unit	Car
A (COMM)	Residential	Plotted Resi development	50 - 225	1	-	1	3
	Commercial	Small Shop	> 0	50	29.28	1	1
Total:						4	5

Parking Check (Table 7b)

Vehicle Type	Reqd.		Achieved	
	No.	Area (Sq.mt)	No.	Area (Sq.mt)
Car	4	55.00	5	68.75
Visitor's Car Parking	1	13.75	0	0.00
Total Car	5	68.75	5	68.75
TwoWheeler	-	27.50	0	0.00
Other Parking	-	-	-	206.41
Total		96.25		275.16

FAR & Tenement Details

Block	No of Same Bldg	Total Built Up Area (Sq.mt)	Deductions (Area in Sq.mt)						Proposed FAR Area (Sq.mt)		Total FAR Area (Sq.mt)	Trmt (No.)
			StairCase	Lift	Lift Machine	Void	Ramp	Parking	Resi.	Commercial		
A (COMM)	1	860.64	25.90	11.25	2.25	64.88	78.37	217.46	431.26	29.28	460.54	04
Grand Total:	1	860.64	25.90	11.25	2.25	64.88	78.37	217.46	431.26	29.28	460.54	04

OWNER / GPA HOLDER'S SIGNATURE

OWNER'S ADDRESS WITH ID NUMBER & CONTACT NUMBER :  
Mr. GLADSTON DAVID, & OTHERS. (Mr. VENKATESWARLU MURAM REDDY (GPA HOLDER) NO-23, NEW BAMBOO BAZAR ROAD, PULAKESHINAGAR

ARCHITECT/ENGINEER /SUPERVISOR 'S SIGNATURE  
Rajashekhar Narayana Kakaraddi #4/1 2nd e main Bhopasandra new layout , Sanjaynagar BCC/BL-3.6/E-2881/2006-07

PROJECT TITLE :  
PLAN SHOWING THE PROPOSED COMMERCIAL/RESIDENTIAL BUILDING AT SITE NO-23, NEW BAMBOO BAZAR ROAD, PULAKESHINAGAR, WARD NO-78, BANGALORE. PID NO.91-60-23.

DRAWING TITLE : 613194807-03-08-2020  
07-27-27\$ \_\$MR VENKATREDDY DRG (1)

SHEET NO : 1