

Approval Condition:

This Plan Sanction is issued subject to the following conditions:

- The sanction is accorded for:
- The sanction is accorded for Plotted Resi development A (ABCD) only. The use of the building shall not deviate to any other use.
- Car Parking reserved in the plan should not be converted for any other purpose.
- Development charges towards increasing the capacity of water supply, sanitary and power main has to be paid to BWSSB and BESCOM if any.
- Necessary ducts for running telephone cables, cables at ground level for postal services & space for dumping garbage within the premises shall be provided.
- The applicant shall construct temporary toilets for the use of construction workers and it should be demolished after the construction.
- The applicant shall INSURE all workmen involved in the construction work against any accident / workmen incidents arising during the time of construction.
- The applicant shall not stock any building materials / debris on footpath or on roads or on drains. The debris shall be removed and transported to road by dumping yard.
- The applicant / builder is prohibited from selling the setback area / open spaces and the common facility areas, which shall be accessible to all the tenants and occupants.
- The applicant shall provide a space for locating the distribution transformers & associated equipment as per E.R.C. (E&D) code having 3.00 mt. from the building within the premises.
- The applicant shall provide a separate room preferably 4.50 x 3.50 m in the basement for installation of telecom equipment and also to make provisions for telecom services as per By-law No. 25.
- The applicant shall maintain during construction such barricading as considered necessary to prevent dust, debris & other materials endangering the safety of people / structures etc. in & around the site.
- Permission shall be obtained from forest department for cutting trees before the commencement of the work.
- License and approved plans shall be posted in a conspicuous place of the licensed premises. The building license and the copies of sanctioned plans with specifications shall be mounted on a frame and displayed and they shall be made available during inspections.
- If any owner / builder contravenes the provisions of Building Bye-laws and rules in force, the Architect / Engineer / Supervisor will be informed by the Authority in the first instance, warned in the second instance and cancel the registration if same is repeated for the first time.
- Technical personnel, applicant or owner as the case may be shall strictly adhere to the duties and responsibilities specified in Schedule - IV (By-law No. 33) under sub-section (1) (b) to (h).
- The building shall be constructed under the supervision of a registered structural engineer.
- On completion of foundation or loadings before erection of walls on the foundation and in the case of columnar structure before erecting the columns "COMMENCEMENT CERTIFICATE" shall be obtained.
- Construction or reconstruction of the building should be completed before the expiry of five years from the date of issue of license & within one month after its completion shall apply for permission to occupy the building.
- The building should not be occupied without obtaining "OCCUPANCY CERTIFICATE" from the competent authority.
- Drinking water supplied by BWSSB should not be used for the construction activity of the building.
- The applicant shall ensure that the Rain Water Harvesting Structures are provided & maintained in good repair for storage of water for non potable purposes or recharge of ground water at all times having a minimum total capacity mentioned in the By-law 30(a).
- The building shall be designed and constructed according to the norms prescribed in National Building Code and in the "Criteria for earthquake resistant design of structures" bearing No. IS 1883-2002 published by the Bureau of Indian Standards making the building resistant to earthquake.
- The applicant should provide solar water heaters as per table 17 of By-law No. 29 for the building.
- Facilities for physically handicapped persons prescribed in schedule X (By-laws - 31) of Building bye-laws 2003 shall be ensured.
- The applicant shall provide at least one common toilet in the ground floor for the use of the visitors / tenants / drivers and security men and also entrance shall be approached through a ramp for the Physically Handicapped persons together with the stepped entry.
- The Occupancy Certificate shall be considered only after ensuring that the provisions of conditions vide S. No. 23, 24, 25 & 28 are provided in the building.
- The applicant shall ensure that no inconvenience is caused to the neighbors in the vicinity of construction and that the construction activities shall stop before 10:00 PM and shall not resume the work earlier than 7:00 AM to avoid disturbance during late hours and early morning hours.
- Garbage originating from Apartments / Commercial buildings shall be segregated into organic and inorganic waste and should be processed in the Recycling processing unit - a 4 capacity installed at site for its re-use / disposal (Applicable for Residential units of 20 and above and 2000 Sqm and above built up area for Commercial buildings).
- The structures with basements shall be designed for structural stability and safety to ensure for soil stabilization during the course of excavation for basements with safe design for retaining walls and super structure for the safety of the structures as well as neighboring property, public roads and footpaths, and besides ensuring safety of workman and general public by erecting safe barricades.
- Sufficient two wheeler parking shall be provided as per requirement.
- Traffic Management Plan shall be obtained from Traffic Management Consultant for all high rise structures which shall be got approved from the Competent Authority if necessary.
- The Owner / Association of high-rise building shall obtain clearance certificate from Karnataka Fire and Emergency Department every Two years with due inspection by the department regarding working condition of Fire Safety Measures installed. The certificate should be produced to the BBMP and Corporation and shall get the renewal of the permission issued once in Two years.
- The Owner / Association of high-rise building shall get the building inspected by empanelled agencies of the Karnataka Fire and Emergency Department to ensure that the equipments installed are in good and workable condition, and as evidenced to that effect shall be submitted to the Corporation and Fire Force Department every year.
- The Owner / Association of high-rise building shall obtain clearance certificate from the Electrical Inspectorate every Two years with due inspection by the Department regarding working condition of Electrical installations / Lifts etc. The certificate should be produced to the BBMP and shall get the renewal of the permission issued once in Two years.
- The Owner / Association of the high-rise building shall conduct two mock - trials in the building one before the onset of summer and another during the summer and assure complete safety in respect of fire hazards.
- The Builder / Contractor / Professional responsible for supervision of work shall not shut maturity and structurally deviate the construction from the sanctioned plan, without previous approval of the authority. They shall explain to the owner's side about the risk involved in continuation of the provisions of the Act, Rules, Bye-laws, Zoning Regulations, Standing Orders and Policy Orders of the BBMP.
- The construction or reconstruction of a building shall be commenced within a period of two (2) years from date of issue of license. Before the expiry of two years, the Owner / Developer shall give intimation to BBMP (Structuring Authority) of the intention to start work in the form prescribed in Schedule VI. Further, the Owner / Developer shall give intimation on completion of the foundation or footing of walls / columns of the foundation. Otherwise the plan sanction deemed cancelled.
- In case of Development plan, Parks and Open Spaces area and Surface Parking area shall be earmarked and reserved as per Development Plan issued by the Bangalore Development Authority.
- All other conditions and conditions mentioned in the work order issued by the Bangalore Development Authority while approving the Development Plan for the project should be strictly adhered to.
- The Applicant / Owner / Developer shall abide by the collection of solid waste and its segregation as per solid waste management by-law 2016.
- The Applicant/Owner/Developer shall abide by sustainable construction and demolition waste management as per solid waste management by-law 2016.
- The Applicant / Owners / Developers shall make necessary provision to charge electrical vehicles.
- The Applicant / Owner / Developer shall plant one tree for a) sites measuring 180 Sqm up to 240 Sqm b) minimum of two trees for sites measuring with more than 240 Sqm. c) One tree for every 240 Sq. of the FAR area as per (wherever in case of Apartment / group housing) multi-dwelling / independent plan.
- In case of any false information, misrepresentation of facts, or pending court cases, the plan sanction is deemed cancelled.
- Also see, building license for special conditions, if any.
- Special Condition as per Labour Department of Government of Karnataka vide ADDENDUM (Hosabang/Hoodde) Letter No. LD/95/ET/2013, dated: 01-04-2013:

COLOR INDEX




COLOR INDEX
 FLOOR BOUNDARY
 ABUTTING ROAD
 PROPOSED WORK (COVERAGE AREA)
 EXISTING (To be retained)
 EXISTING (To be demolished)

AREA STATEMENT (BMP)		VERSION DATE: 08/09/2020
PROJECT DETAIL		
Authority: BBMP	Plot Use: Residential	
Inward No: BBMP/Plat Cym. EST/0350/20-21	Plot SubUse: Plotted Resi development	
Application Type: General	Land Use Zone: Residential (Main)	
Proposed Type: Building Permission	Plot/Sub Plot No.: 46/1	
Nature of Sanction: ADDITION OR EXTENSION	Khata No. (As per Khata Extract): 46/1	
Location: Ring-II	Locality / Street of the property: KACHARAKANAHALLI BANGALORE	
Building Line Specified as per Z.R. NA		
Zone: East		
Ward: Ward-529		
Planning District: 217-Kannanahalli		
AREA DETAILS		50 MT
AREA OF PLOT (Minimum)	(A)	1400.99
NET AREA OF PLOT	(A-Deductions)	1459.89
COVERAGE CHECK		
Permissible Coverage area (60.00 %)		894.54
Proposed Coverage Area (28.67 %)		427.42
Existing coverage area to be retained (22.07 %)		320.10
Achieved net coverage area (50.74 %)		750.53
Balance coverage area (9.26 %)		138.01
FAR CHECK		
Permissible F.A.R. as per zoning regulation 2015 (1.75)		2609.06
Additional F.A.R. within Ring I and II for amalgamated plot -		0.00
Allowable TOR Area (80% of Perm FAR)		0.00
Premium FAR for Plot within Impact Zone (-)		0.00
Total Perm. FAR area (1.75)		2609.06
Proposed FAR Area		1396.10
Residential FAR (100.00%)		1396.10
Existing FAR Area		899.00
Achieved Net FAR Area (1.54)		2295.10
Proposed FAR Area (0.21)		313.96
BUILT UP AREA CHECK		
Existing BuiltUp Area		1720.02
Proposed BuiltUp Area		1254.45
Subvented Area ASD in BUA (Layout Lvl)		15.00
Achieved BuiltUp Area		2984.47

Approval Date : 10/17/2020 3:16:22 PM

Payment Details

Sr No.	Challan Number	Receipt Number	Amount (INR)	Payment Mode	Transaction Number	Payment Date	Remark
1	BBMP/PA242CH20-21	BBMP/PA242CH20-21	2272.8	Online	1086566871	08/09/2020	-
				Head		7/20/21 PM	
				Surcharge Fee		2272.8	

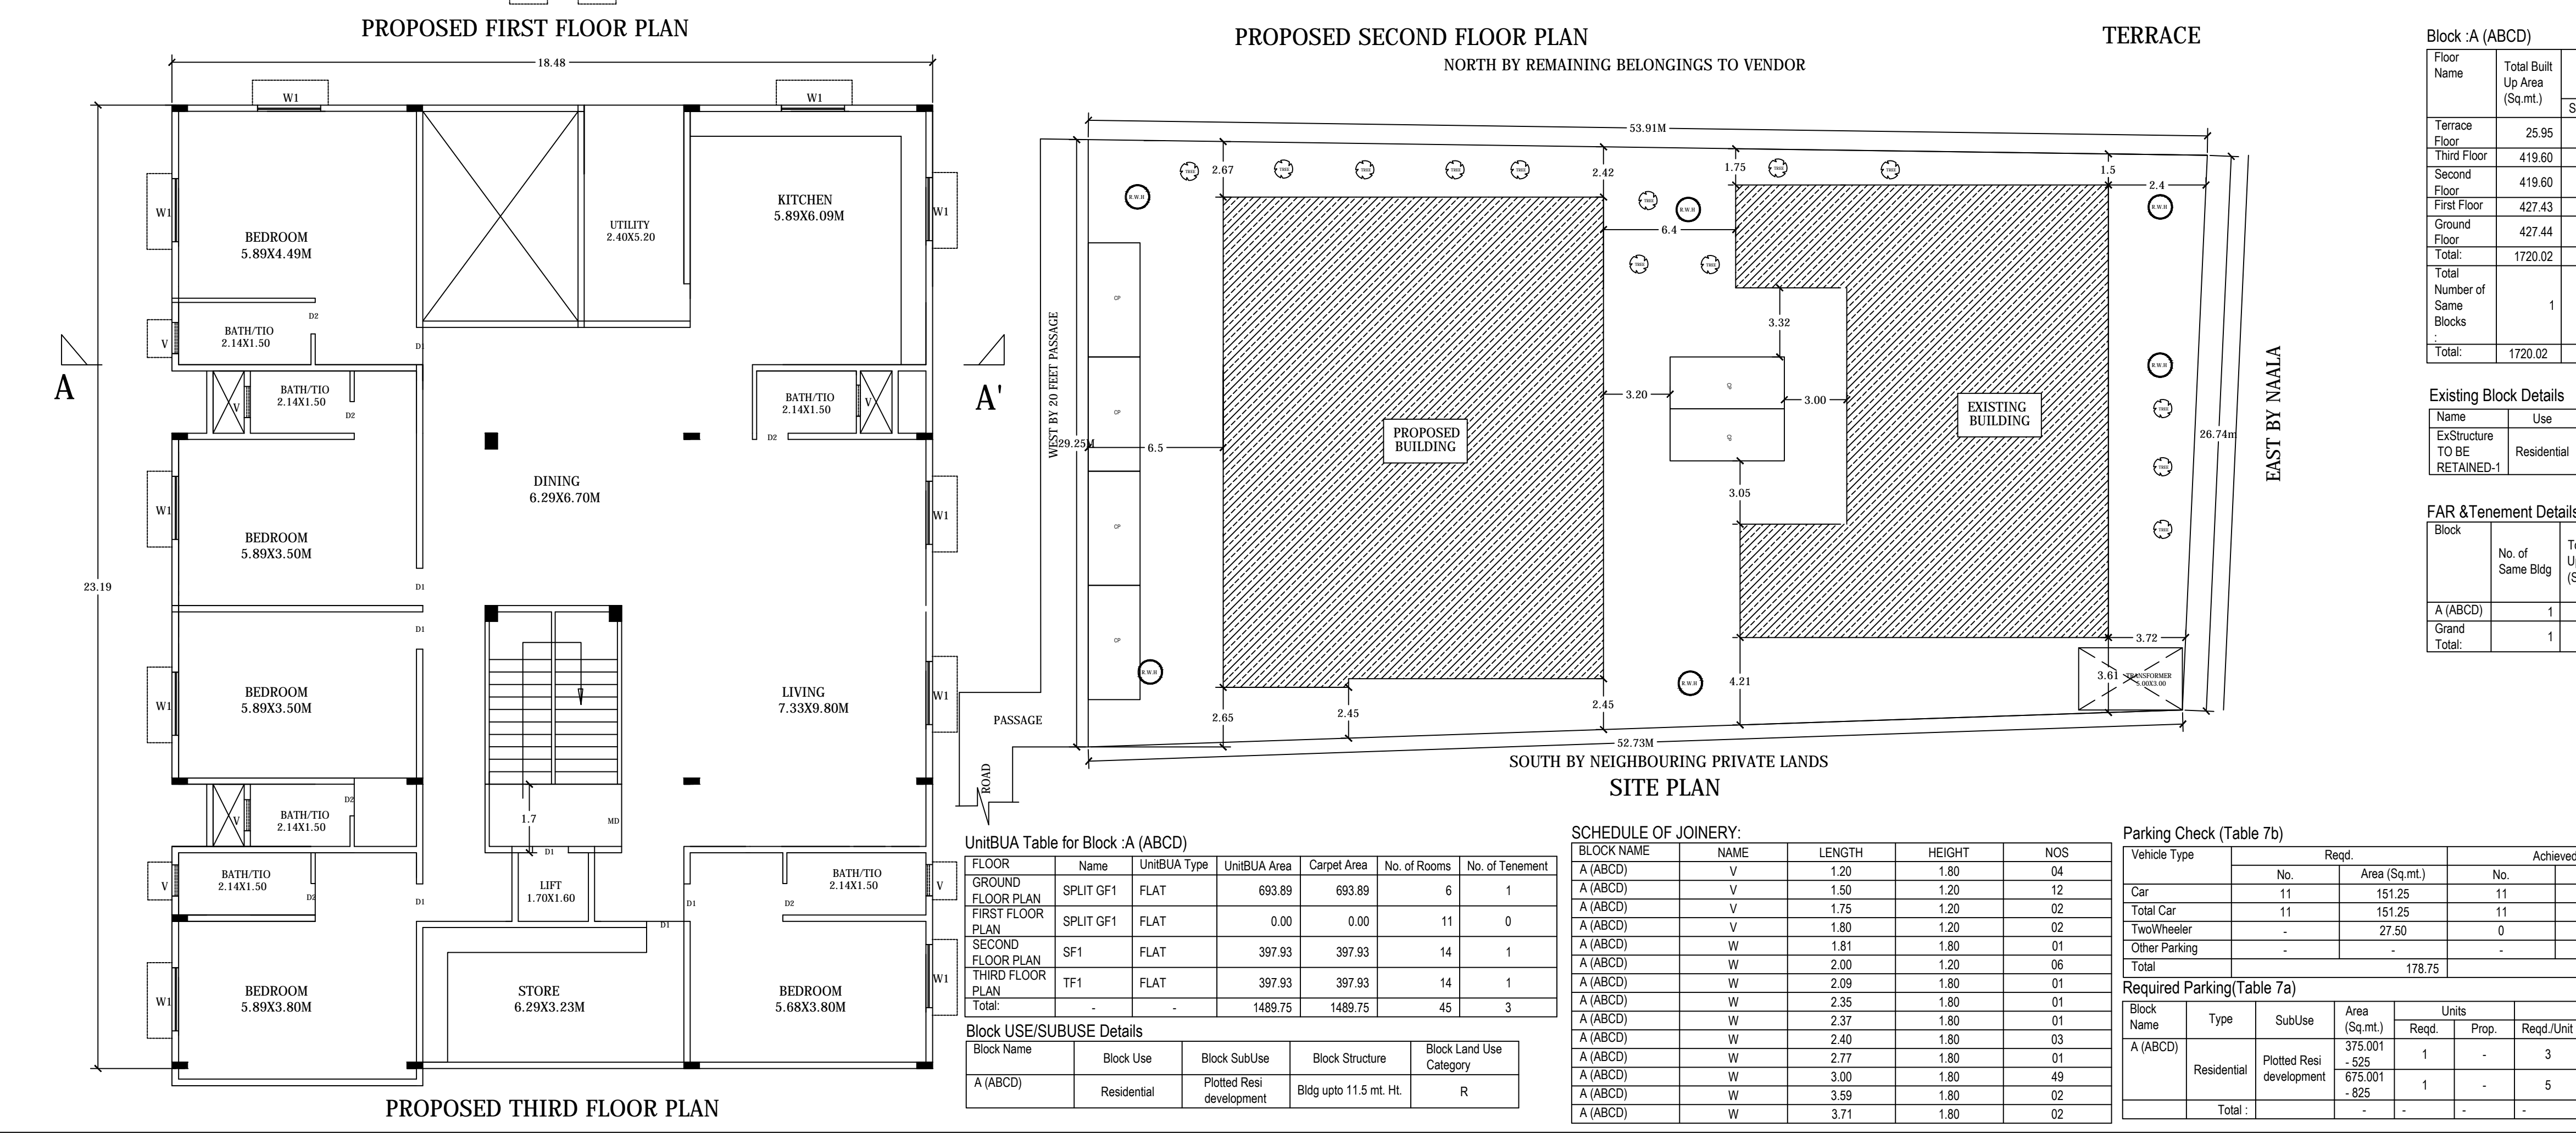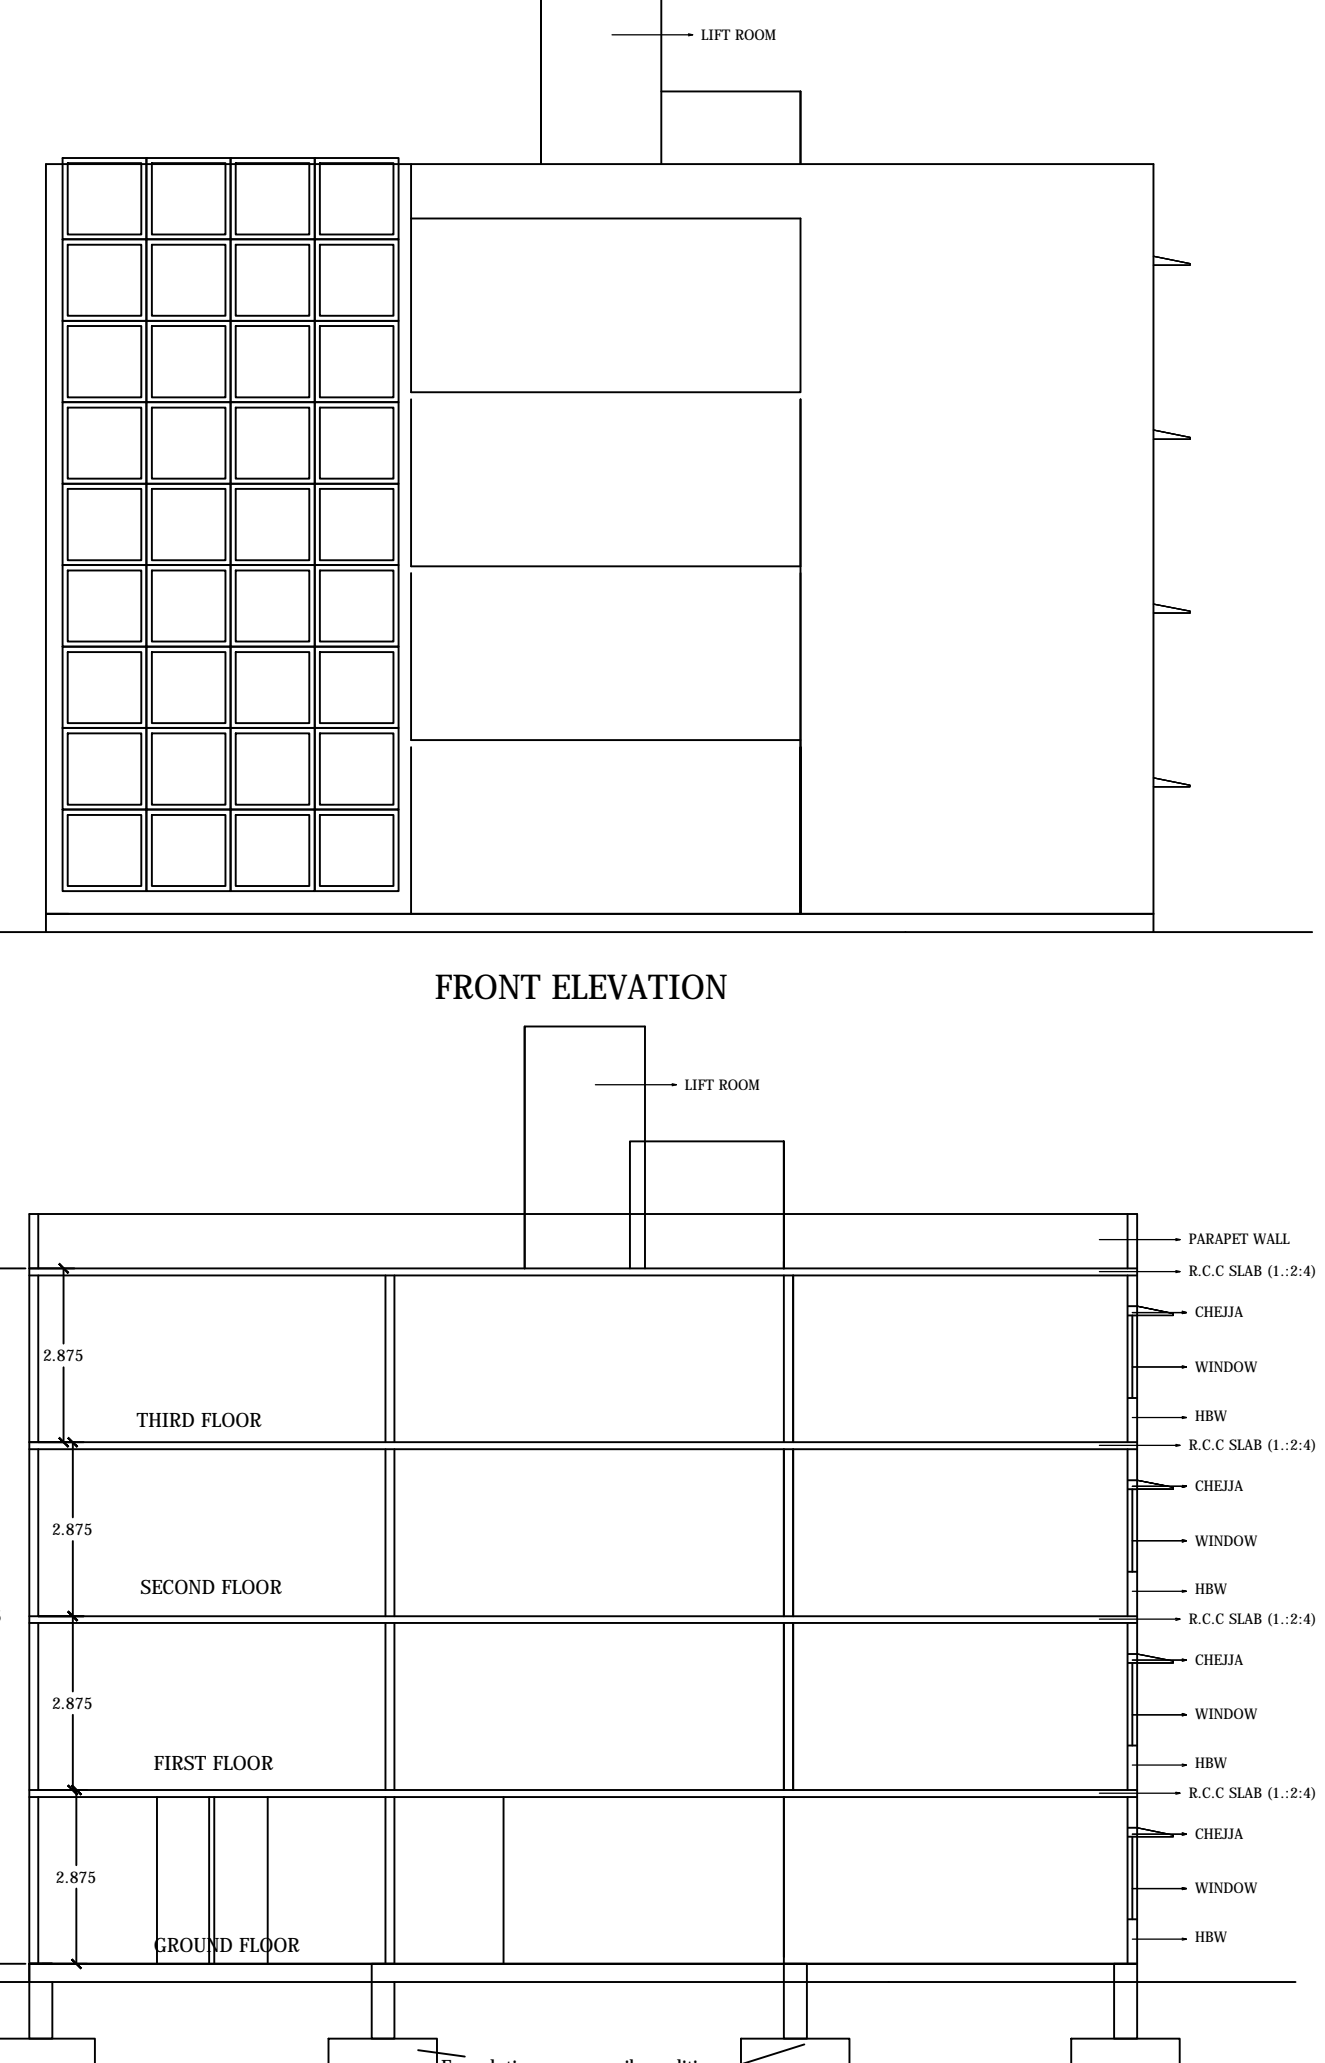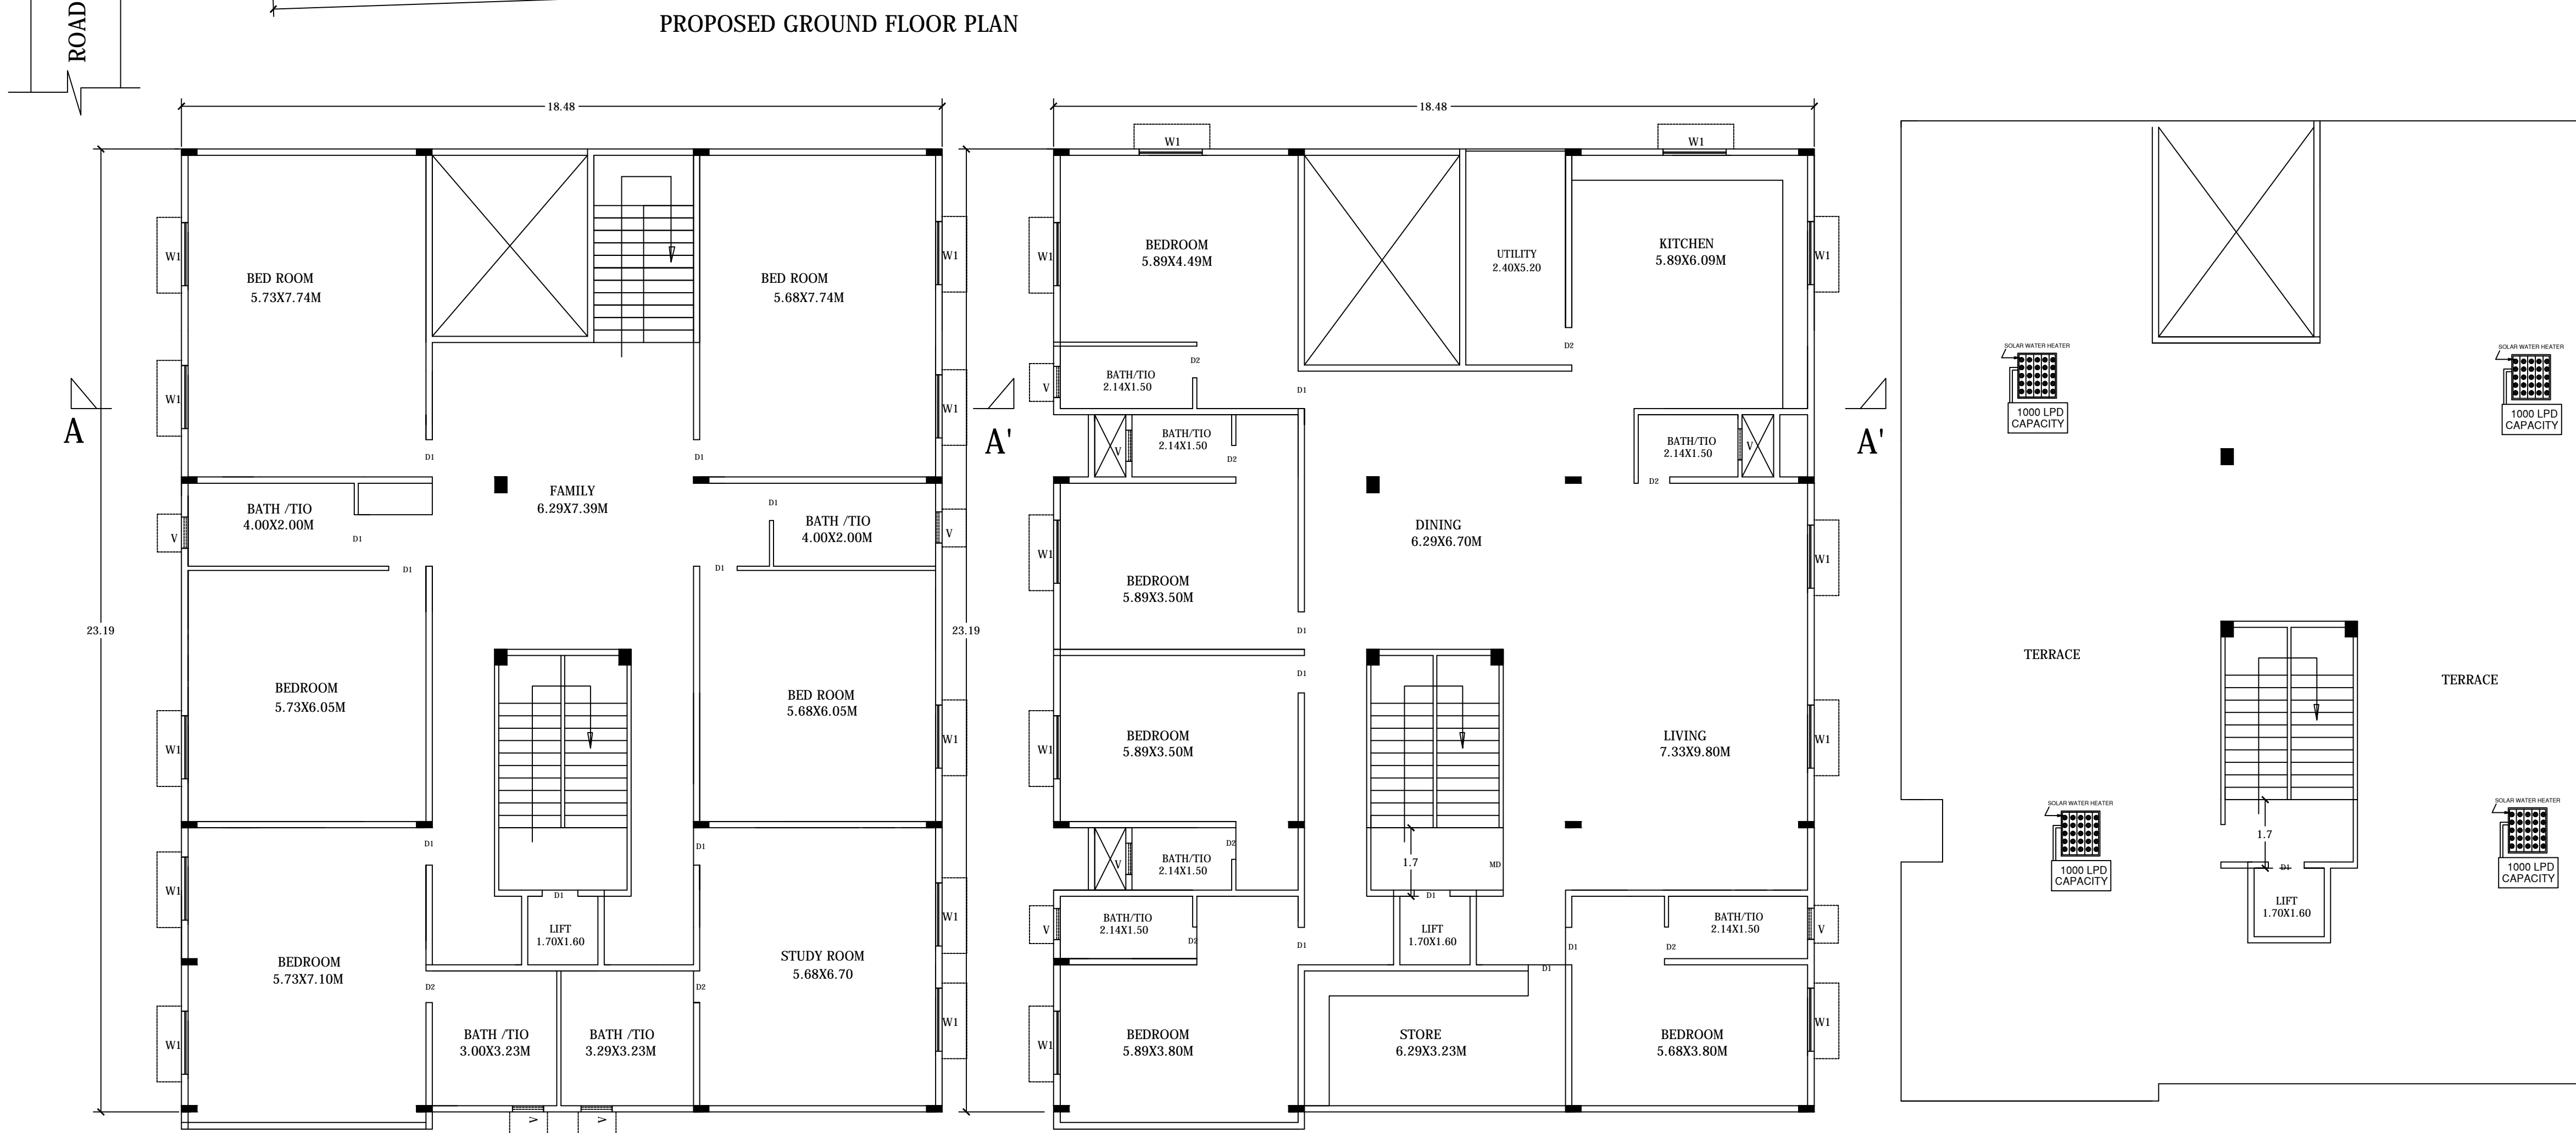

Block - A (ABCD)

Floor Name	Total Built Up Area (Sq.mt)	Deductions (Area in Sq.mt)				Proposed FAR Area (Sq.mt)	Total FAR Area (Sq.mt)	Tmt (No.)
		StartCase	Lit	Lit Machine	Void			
Terrace	25.95	23.16	0.00	2.79	0.00	0.00	0.00	00
Third Floor	419.60	17.46	2.79	0.00	18.68	0.00	380.47	01
Second Floor	419.60	17.46	2.79	0.00	18.68	0.00	380.47	01
First Floor	427.43	29.28	2.79	0.00	16.30	0.00	380.06	00
Ground Floor	427.44	30.45	2.79	0.00	16.30	122.79	255.11	01
Total	1720.02	116.81	11.16	2.79	70.36	122.79	1396.11	03

Existing Block Details

Name	Use	SubUse	Type	Structure	Height	Floor No	FAR Area	BUA Area
TO BE RETAINED-1	Residential	Apartment	Building	Bldg upto 11.5 mt. Ht.	9.00	4	899.00	1254.45

Required Parking (Table 7a)

Block Name	Type	Area (Sq.mt)	Regd.	Units	Prop.	Regd./UH	Car	Prop.
A (ABCD)	Residential	1720.02	116.81	11.16	2.79	70.36	122.79	1396.11
Total								

SCHEDULE OF JOINERY:

BLOCK NAME	NAME	LENGTH	HEIGHT	NOS
A (ABCD)	D2	0.75	2.10	12
A (ABCD)	D1	0.90	2.10	19
A (ABCD)	D2	0.90	2.10	06
A (ABCD)	D1	1.00	2.10	06
A (ABCD)	MD	1.20	2.10	01
A (ABCD)	MD	1.50	2.10	02

OWNER / GPA HOLDER'S SIGNATURE
 OWNER'S ADDRESS WITH ID NUMBER & CONTACT NUMBER :
 ECHO(PRATHIDWANI) Rep by its Managing Trustee FRANTONY SEBASTIAN O PRAEM NO.46/1, KACHARAKANAHALLI

ARCHITECT/ENGINEER / SUPERVISOR'S SIGNATURE
 MEHBOOB BASHA O'S.6TH CROSS, 5TH MAIN, VENKATARAMPURAM, BANGALORE E-3150/2007-08

PROJECT TITLE :
 PLAN SHOWING THE EXI BUILDING WITH ADDITION GROUND, FIRST, SECOND & THIRD FLOOR PLAN AT SITE NO.046/1, KACHARAKANAHALLI, BANGALORE, WARD NO.89/29, PID-89-04-04/1.

DRAWING TITLE : 1841910195-20-10-2020
 11-20-37S, \$5 REVISED ECHO PRATHIDWANI 2010 2020 :: A (ABCD) with GF+3UF

SHEET NO : 1

The plans are approved in accordance with the acceptance for approval by the Joint Commissioner (EAST) on date: 17/10/2020 vide lp number: BBMP/AD.COM./EST/0350/20-21 subject to terms and conditions laid down along with this building plan approval. Validity of this approval is two years from the date of issue.

ASSISTANT DIRECTOR OF TOWN PLANNING (EAST)
 BHRUHAT BENGALURU MAHANAGARA PALIKE