




PROPOSED BASEMENT FLOOR PLAN

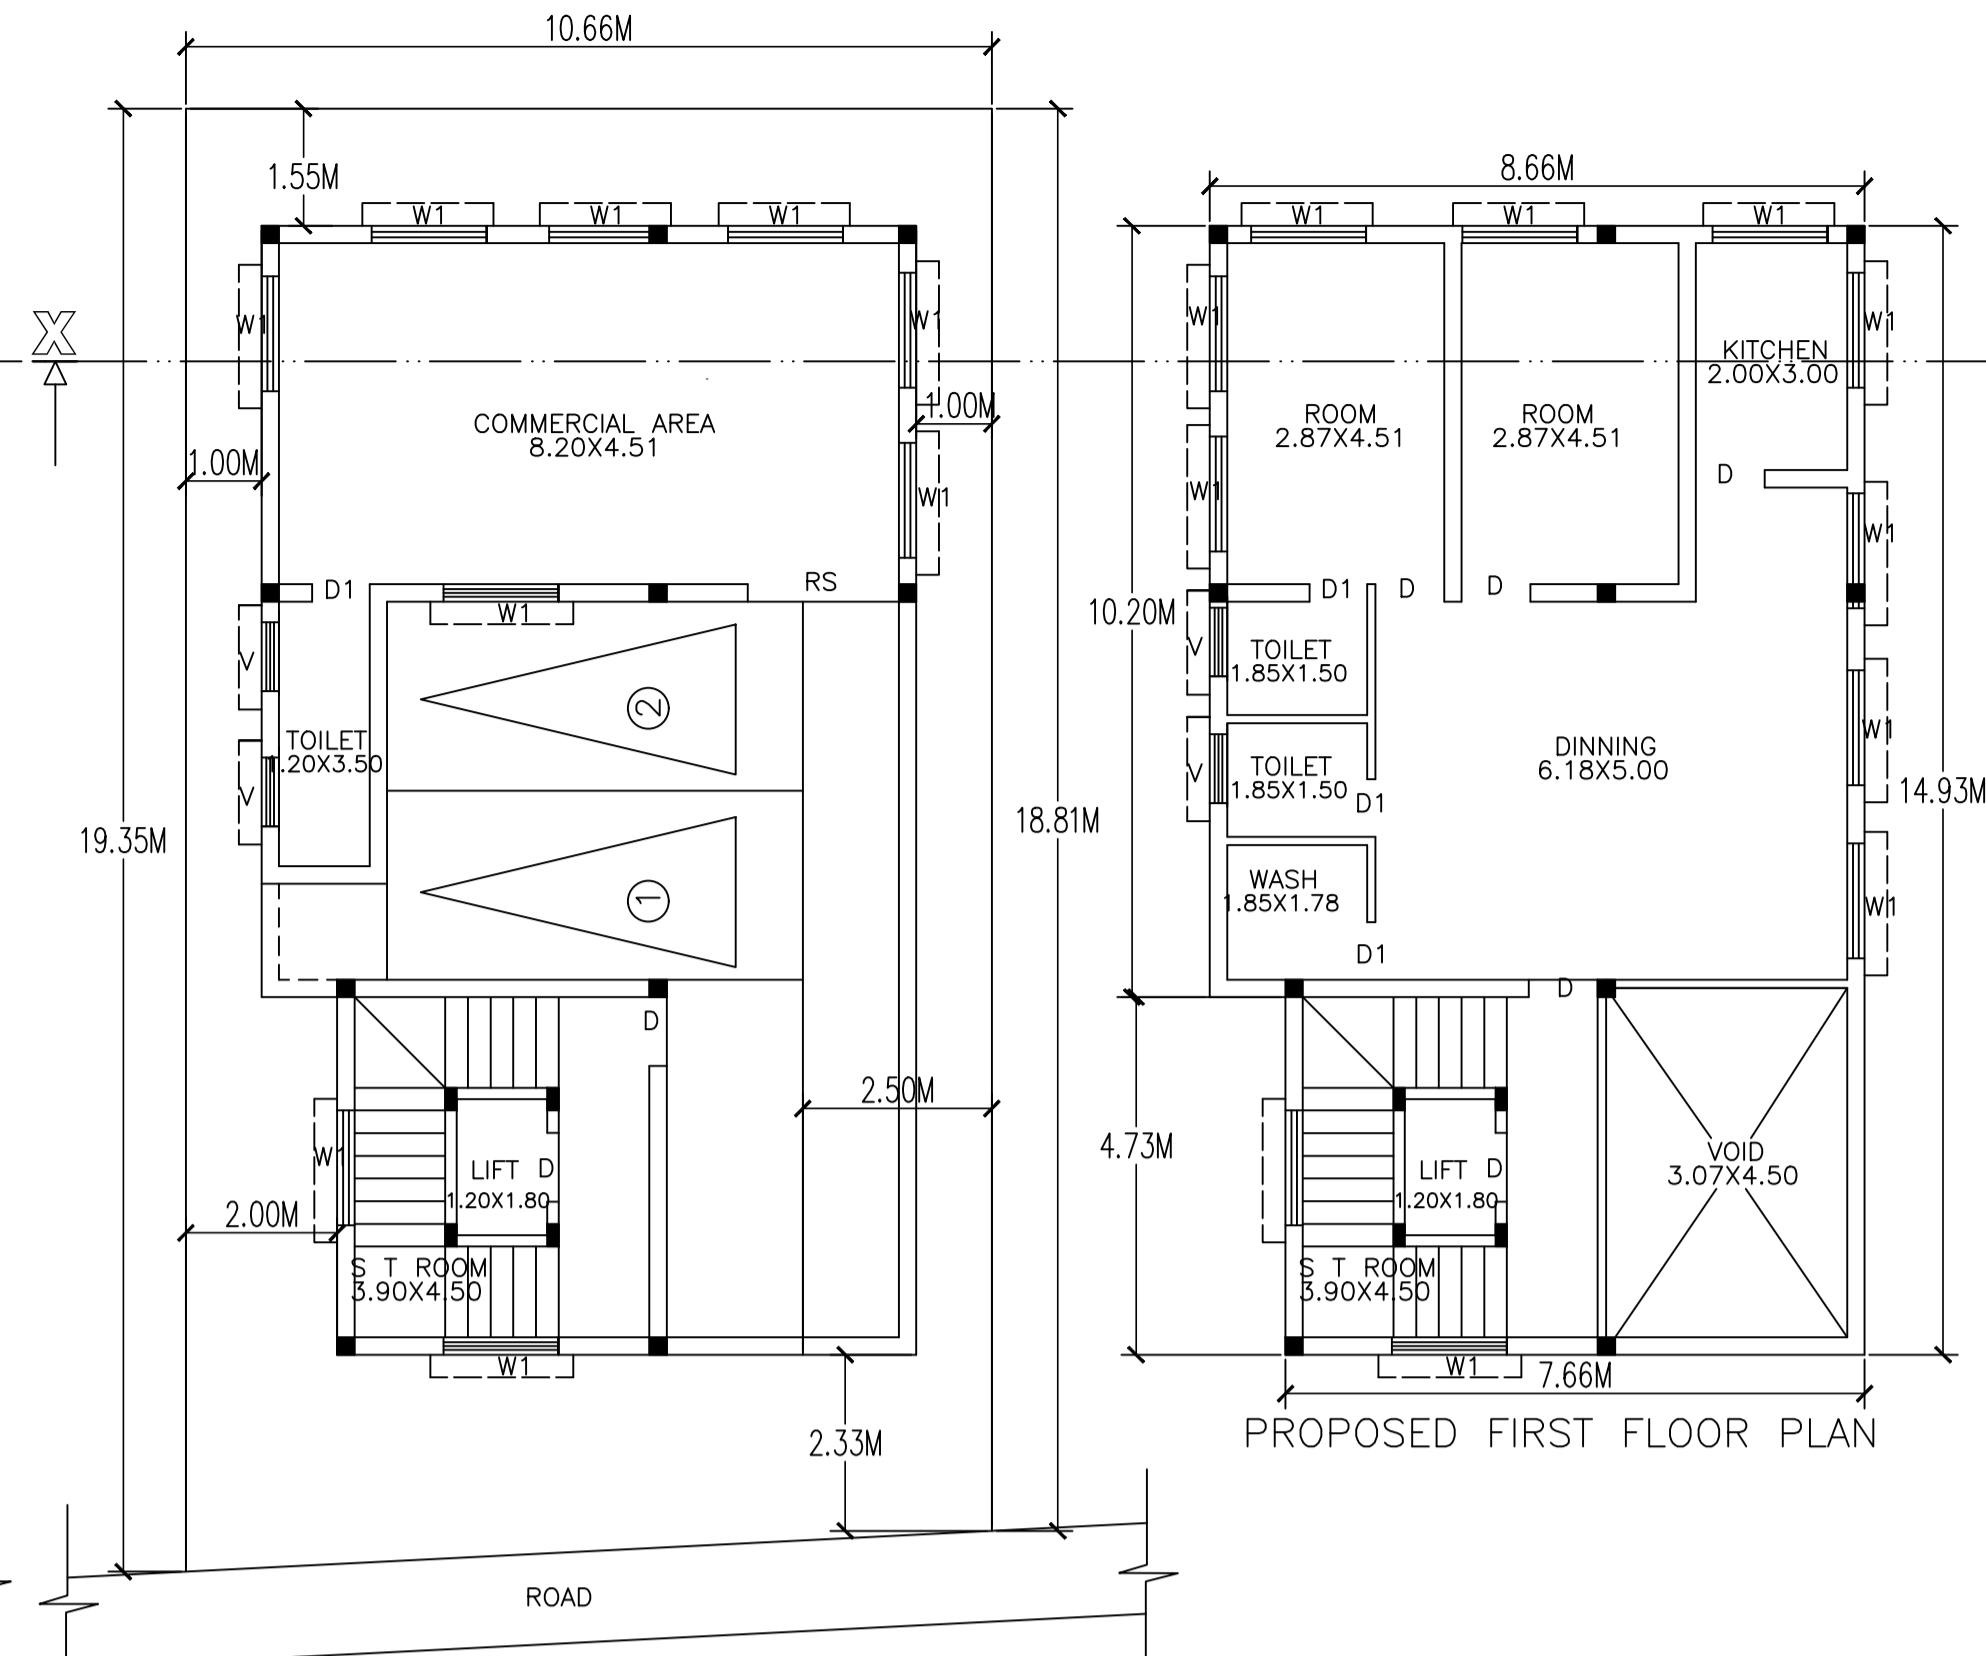



PROPOSED GROUND FLOOR PLAN

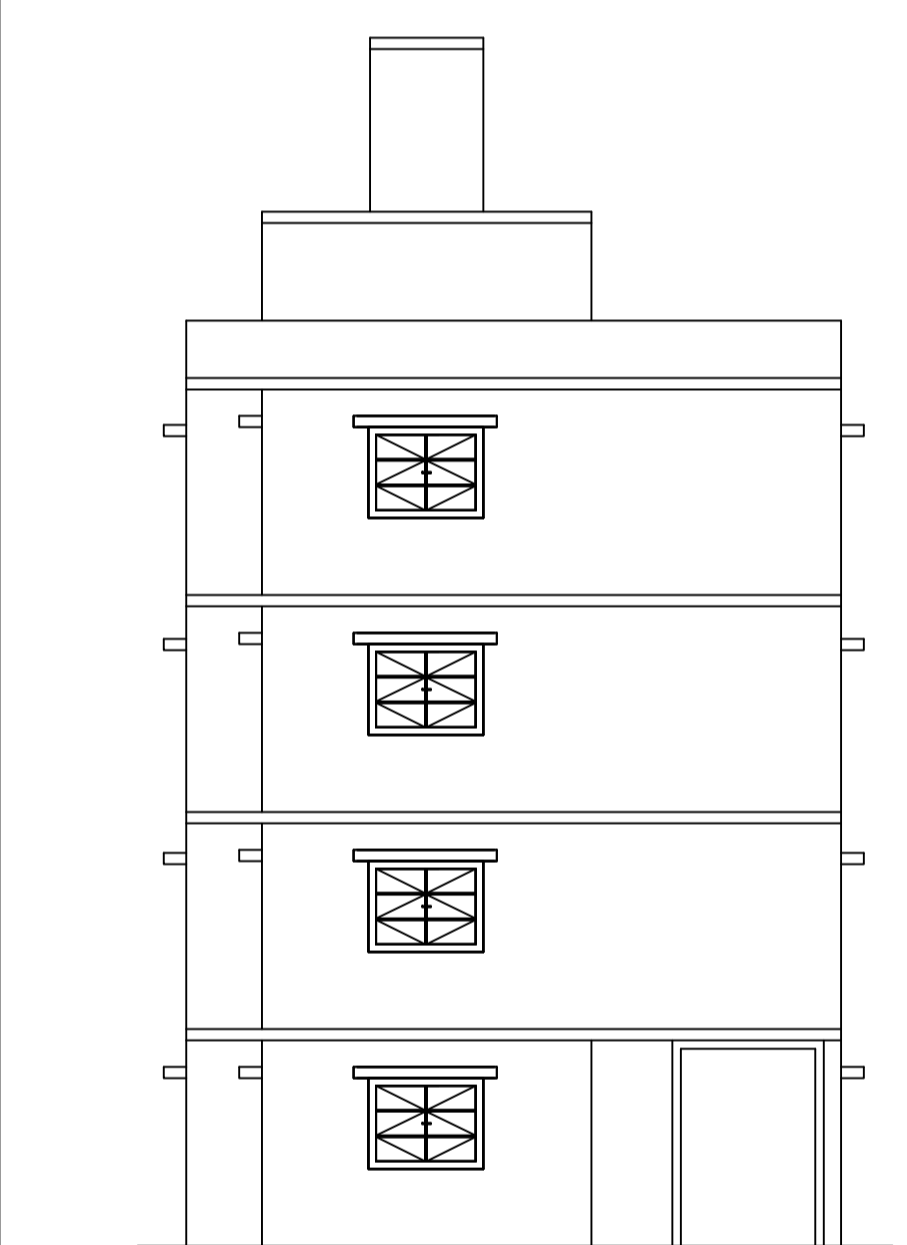


FRONT ELEVATION

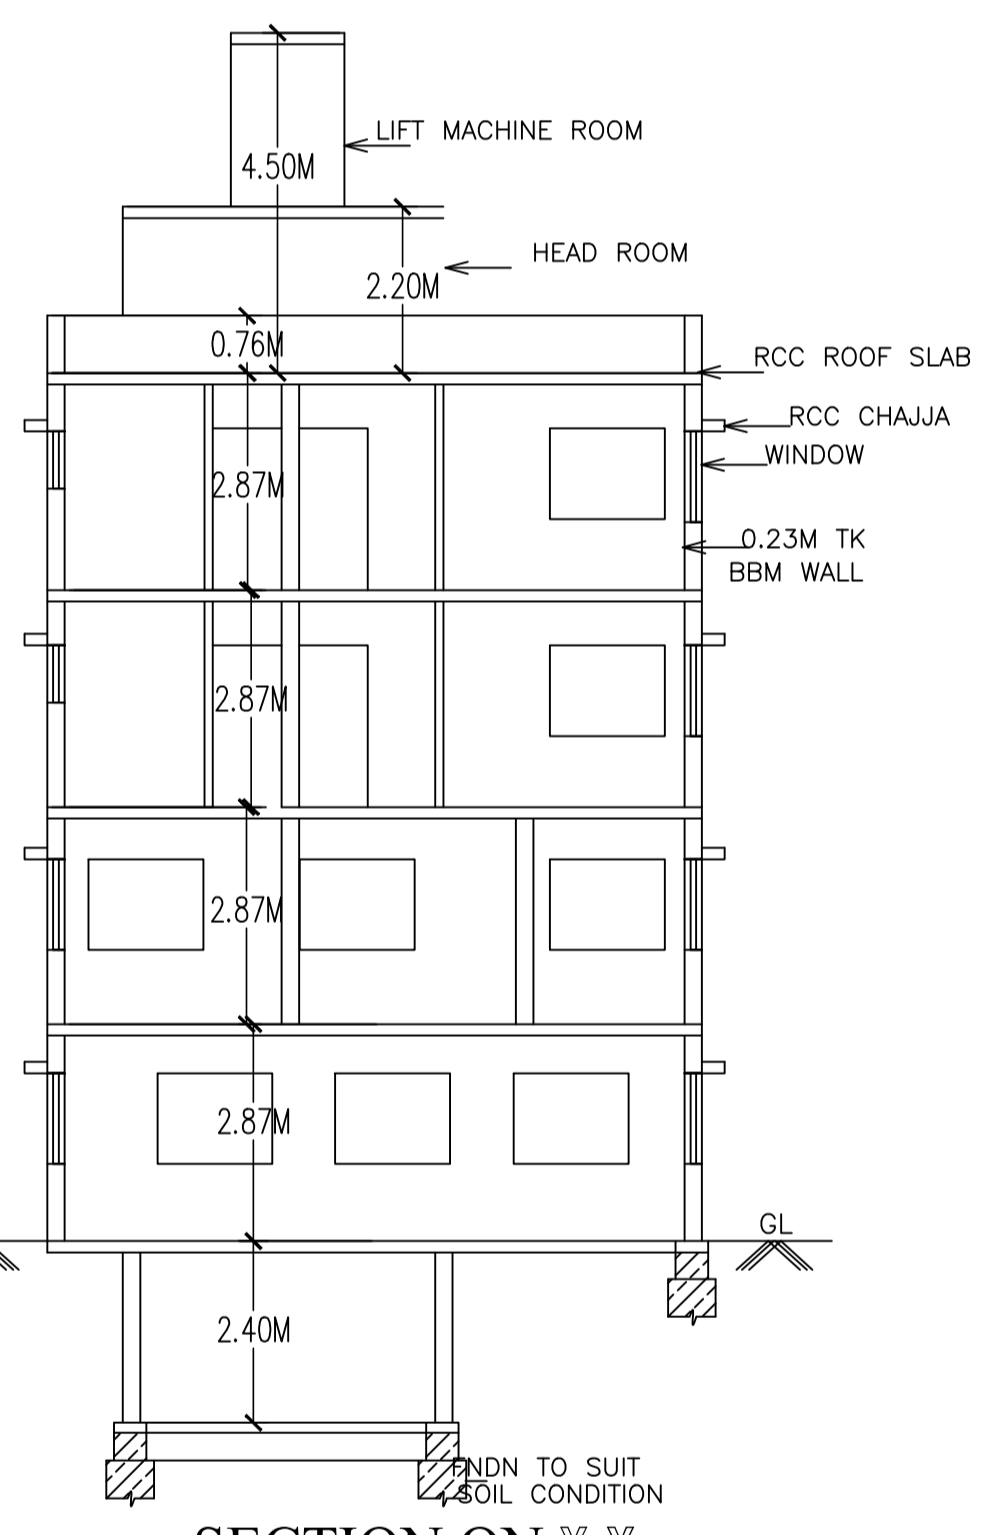


SECTION ON X-X

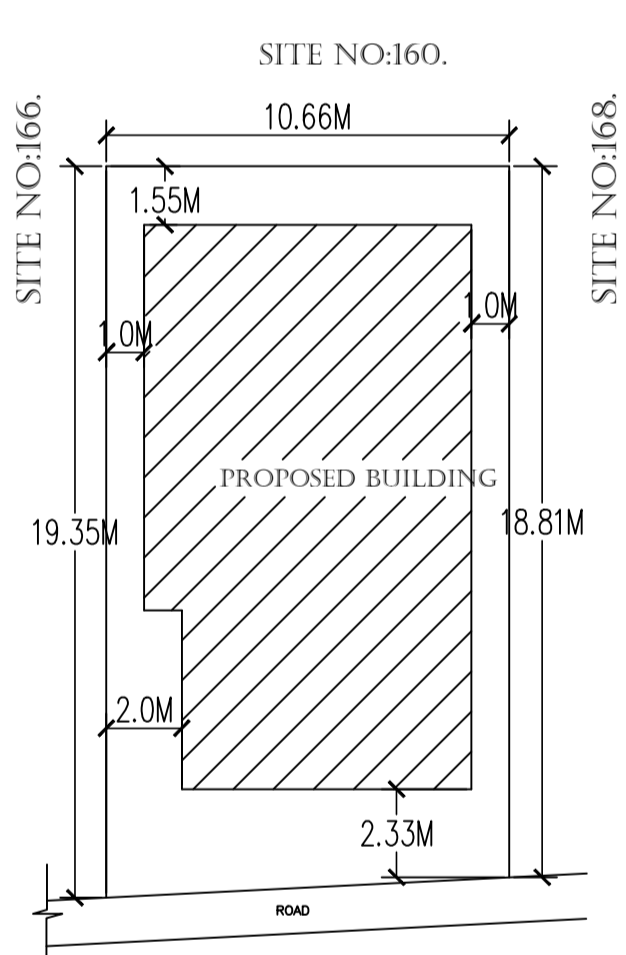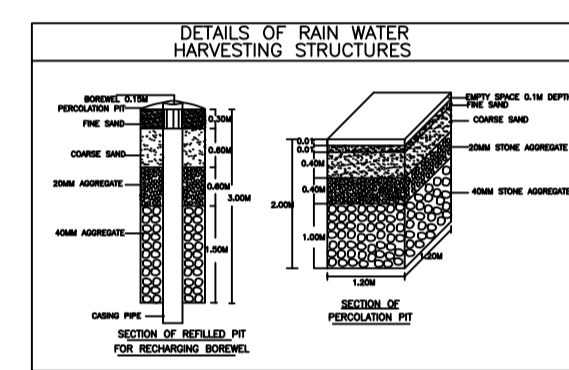

SITE PLAN SCALE 1:200

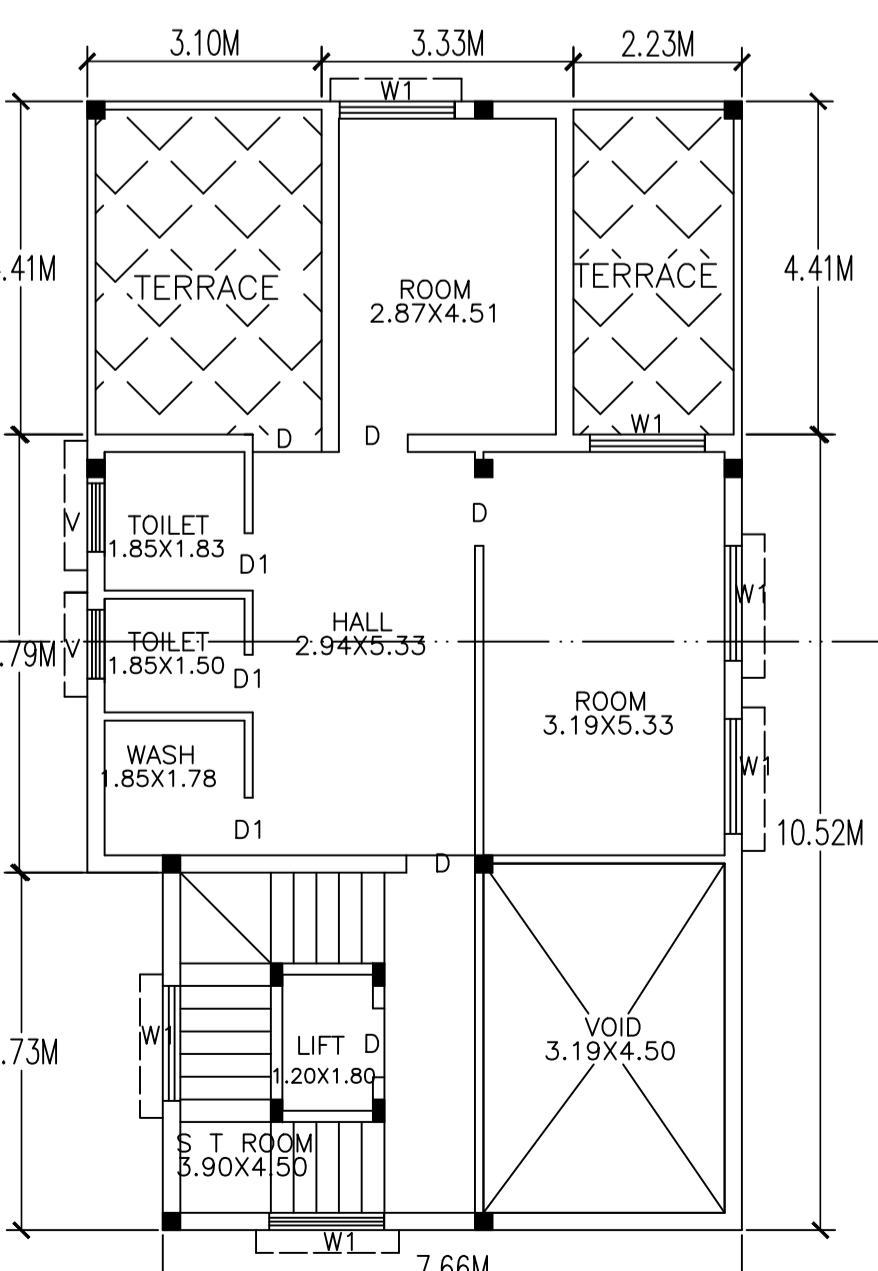

PROPOSED TYPICAL SECOND & THIRD FLOOR PLAN

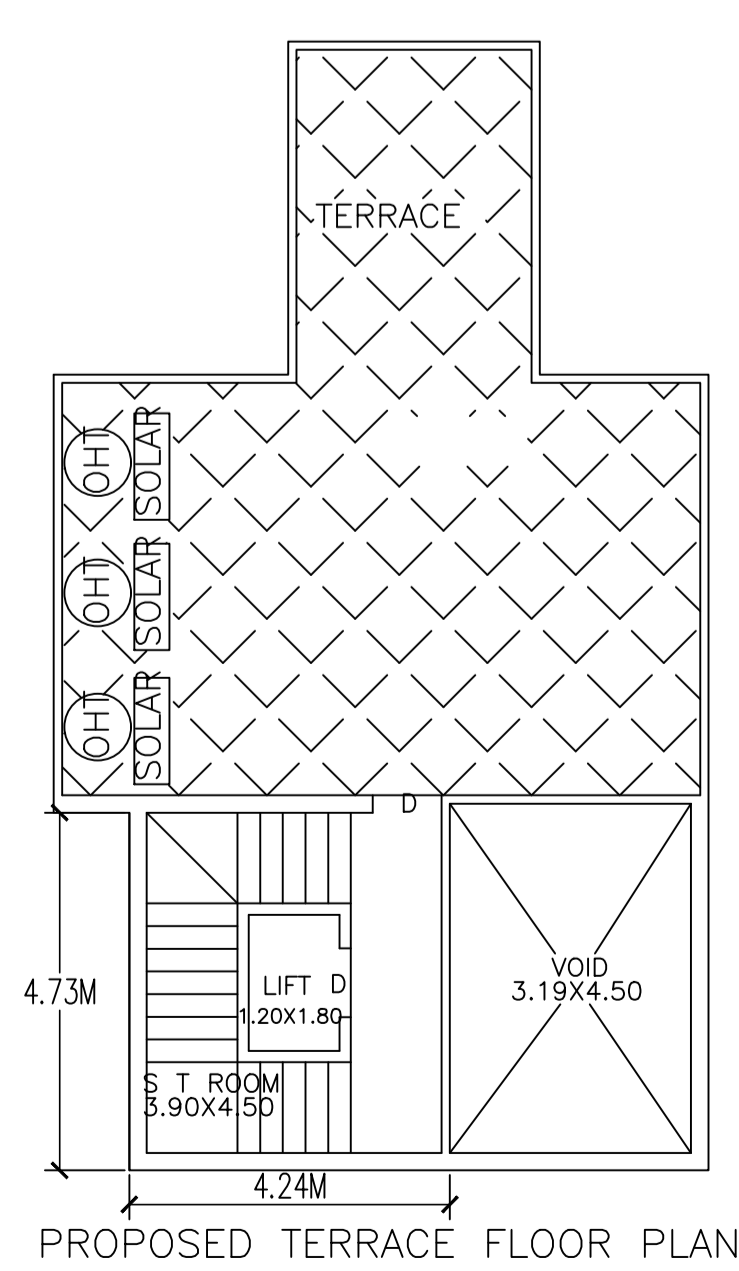

PROPOSED TERRACE FLOOR PLAN

Floor Name	Total Built Up Area (Sq.mt.)	Deductions (Area in Sq.mt.)					Proposed FAR Area (Sq.mt.)		Add Area In FAR (Sq.mt.)	Total FAR Area (Sq.mt.)	Tmtt (No.)	Carpet Area other than Tenement
		Stair/Case	Lift	Lift Machine	Void	Parking	Resi.	Commercial				
Terrace Floor	23.19	21.03	0.00	2.16	0.00	0.00	0.00	0.00	0.00	00	0.00	
Third Floor	101.08	0.00	2.16	0.00	14.74	0.00	84.18	0.00	0.00	84.18	00	
Second Floor	101.08	0.00	2.16	0.00	14.74	0.00	84.18	0.00	0.00	84.18	00	
First Floor	124.57	0.00	2.16	0.00	14.74	0.00	107.67	0.00	0.00	107.67	01	
Ground Floor	109.62	0.00	2.16	0.00	0.00	48.24	0.00	49.23	9.99	59.22	00	
Basement Floor	21.63	0.00	2.16	0.00	0.00	0.00	19.47	0.00	0.00	19.47	00	
Total:	481.17	21.03	10.80	2.16	44.22	48.24	295.50	49.23	9.99	354.72	01	
Total Number of Same Blocks	1											
Total:	481.17	21.03	10.80	2.16	44.22	48.24	295.50	49.23	9.99	354.72	01	

SCHEDULE OF JOINERY:

BLOCK NAME	NAME	LENGTH	HEIGHT	NOS
COMMERCIAL (HOSTEL)	D1	0.76	2.10	10
COMMERCIAL (HOSTEL)	D	0.91	2.10	13
COMMERCIAL (HOSTEL)	RS	2.00	2.10	01

SCHEDULE OF JOINERY:

BLOCK NAME	NAME	LENGTH	HEIGHT	NOS
COMMERCIAL (HOSTEL)	V	1.20	1.20	08
COMMERCIAL (HOSTEL)	W1	1.35	2.00	03
COMMERCIAL (HOSTEL)	W1	1.52	2.00	26
COMMERCIAL (HOSTEL)	W1	1.52	2.00	07

Approval Condition :

This Plan Sanction is issued subject to the following conditions :

- Sanction is accorded for the Residential Building at 167, #167 MYLASANDRA, Bangalore.
- Consist of Basement + 1 Ground + 3 only.
- Sanction is accorded for Residential use only. The use of the building shall not be deviated to any other use.
- 348.24 area reserved for car parking shall not be converted for any other purpose.
- Development charges towards increasing the capacity of water supply, sanitary and power main has to be paid to BWSSB and BESCOM if any.
- Necessary ducts for running telephone cables, cables at ground level for postal services & space for dumping garbage within the premises shall be provided.
- The applicant shall INSURE all workmen involved in the construction work against any accident / untoward incidents arising during the time of construction.
- The applicant shall not stock any building materials / debris on footpath or on roads or on drains. The debris shall be removed and transported to near by dumping yard.
- The applicant shall maintain during construction such barricading as considered necessary to prevent dust, debris & other materials endangering the safety of people / structures etc. in & around the site.
- The applicant shall plant at least two trees in the premises.
- Permission shall be obtained from forest department for cutting trees before the commencement of the work.
- License and approved plans shall be posted in a conspicuous place of the licensed premises. The building license and the copies of sanctioned plans with specifications shall be mounted on a frame and displayed and they shall be made available during inspections.
- If any owner / builder contravenes the provisions of Building Bye-laws and rules in force, the Architect / Engineer / Supervisor will be informed by the Authority in the first instance, warned in the second instance and cancel the registration if the same is repeated for the third time.
- Technical personnel, applicant or owner as the case may be shall strictly adhere to the duties and responsibilities specified in Schedule - IV (Bye-law No. 3.6) under sub section IV-8 (e) to (k).
- The building shall be constructed under the supervision of a registered structural engineer.
- On completion of foundation or footings before erection of walls on the foundation and in the case of columnar structure before erecting the columns "COMMENCEMENT CERTIFICATE" shall be obtained.
- The building should not be occupied without obtaining "OCCUPANCY CERTIFICATE" from the competent authority.
- Drinking water supplied by BWSSB should not be used for the construction activity of the building.
- The applicant shall ensure that the Rain Water Harvesting Structures are provided & maintained in good repair for storage of water for non potable purposes or recharge of ground water at all times having a minimum total capacity mentioned in the Bye-law 32(a).
- If any owner / builder contravenes the provisions of Building Bye-laws and rules in force, the authority will inform the same to the concerned registered Architect / Engineers / Supervisor in the first instance, warn in the second instance and cancel the registration of the professional if the same is repeated for the third time.
- The Builder / Contractor / Professional responsible for supervision of work shall not shall not materially and structurally deviate the construction from the sanctioned plan, without previous approval of the authority. They shall explain to the owner s about the risk involved in contravention of the provisions of the Act, Rules, Bye-laws, Zoning Regulations, Standing Orders and Policy Orders of the BBMP.
- In case of any false information, misrepresentation of facts, or pending court cases, the plan sanction is deemed cancelled.

Special Condition as per Labour Department of Government of Karnataka vide ADDENDUM (Hosadagahoolke) Letter No. LD/SULET/2013, dated: 01-04-2013 :

- Registration of Applicant / Builder / Owner / Contractor and the construction workers working in the construction site with the "Karnataka Building and Other Construction workers Welfare Board" should be strictly adhered to.
- The Applicant / Builder / Owner / Contractor should submit the Registration of establishment and list of construction workers engaged at the time of issue of Commencement Certificate. A copy of the same shall also be submitted to the concerned local Engineer in order to inspect the establishment and ensure the registration of establishment and workers working at construction site or work place.
- The Applicant / Builder / Owner / Contractor shall also inform the changes if any of the list of workers engaged by him.

At any point of time No Applicant / Builder / Owner / Contractor shall engage a construction worker in his site or work place who is not registered with the "Karnataka Building and Other Construction workers Welfare Board".


Note :

- Accommodation shall be provided for setting up of schools for imparting education to the children of construction workers in the labour camps / construction sites.
- List of children of workers shall be furnished by the builder / contractor to the Labour Department which is mandatory.
- Employment of child labour in the construction activities strictly prohibited.
- Obtaining NCC from the Labour Department before commencing the construction work is a must.
- BBMP will not be responsible for any dispute that may arise in respect of property in question.
- In case if the documents submitted in respect of property in question is found to be false or fabricated, the plan sanctioned stands cancelled automatically and legal action will be initiated.

The plans are approved in accordance with the acceptance for approval by the Joint Commissioner (RR NAGAR) on date: 20/11/2019 vide lp number: BBMP/Ad.Com./R/H/1451/19-20 subject to terms and conditions laid down along with this building plan approval.

Validity of this approval is two years from the date of issue.

ASSISTANT DIRECTOR OF TOWN PLANNING (RR NAGAR)
BHARUAT BENGALURU MAHANAGARA PALIKE

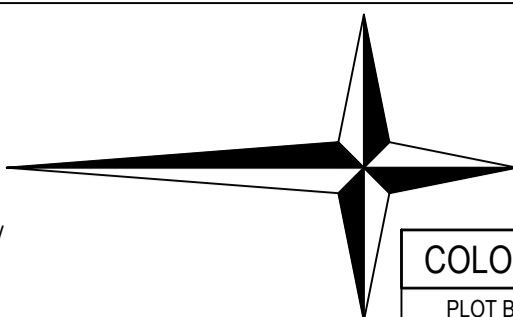

COLOR INDEX	
PLOT BOUNDARY	Black
ABUTTING ROAD	Green
PROPOSED WORK (COVERAGE AREA)	Red
EXISTING (To be retained)	Blue
EXISTING (To be demolished)	Yellow

AREA STATEMENT (BBMP)		VERSION NO. : 1.0.11
PROJECT DETAIL:		VERSION DATE: 01/11/2018
Authority: BBMP	Plot Use: Residential	
Inward No: BBMP/Ad.Com./R/H/1451/19-20	Plot SubUse: Plotted Resi development	
Application Type: General	Land Use Zone: Residential (Main)	
Proposal Type: Building Permission	Plot/Sub Plot No.: 167	
Nature of Sanction: New	Khata No. (As per Khata Extract): 2069/167/1994/2059	
Location: Ring-III	Locality / Street of the property: #167 MYLASANDRA	
Building Line Specified as per Z.R. NA		
Zone: Rajarajeshwarnagar		
Ward: Ward-198		
Planning District: 301-Kengeri		
AREA DETAILS:		SQ.MT.
AREA OF PLOT (Minimum)	(A)	203.39
NET AREA OF PLOT	(A-Deductions)	203.39
COVERAGE CHECK		
Permissible Coverage area (75.00 %)		152.54
Proposed Coverage Area (53.9 %)		109.62
Achieved Net coverage area (53.9 %)		109.62
Balance coverage area left (21.1 %)		42.92
FAR CHECK		
Permissible F.A.R. as per zoning regulation 2015 (1.75)		355.93
Additional F.A.R within Ring I and II (for amalgamated plot -)		0.00
Allowable TDR Area (60% of Perm.FAR)		0.00
Premium FAR for Plot within Impact Zone (-)		0.00
Total Perm. FAR area (1.75)		355.93
Residential FAR (83.30%)		295.50
Commercial FAR (13.88%)		49.23
Proposed FAR Area		354.72
Achieved Net FAR Area (1.74)		354.72
Balance FAR Area (0.01)		1.21
BUILT UP AREA CHECK		
Proposed BuiltUp Area		481.17
Achieved BuiltUp Area		481.17

Approval Date : 11/20/2019 12:09:37 PM

Payment Details

Sr No.	Challan Number	Receipt Number	Amount (INR)	Payment Mode	Transaction Number	Payment Date	Remark
1	BBMP/23786/CH/19-20	BBMP/23786/CH/19-20	2165	Online	9259807929	10/25/2019 1:34:15 PM	-
	No.	Head	Amount (INR)				Remark
	1	Scrutiny Fee	2165				-

Block USE/SUBUSE Details

Block Name	Block Use	Block SubUse	Block Structure	Block Land Use Category
COMMERCIAL (HOSTEL)	Commercial	Small Shop	Bldg upto 11.5 mt. Ht.	R

Required Parking (Table 7a)

Block Name	Type	SubUse	Area (Sq.mt.)	Units		Car
				Reqd./Unit	Prop.	
COMMERCIAL (HOSTEL)	Commercial	Small Shop	> 0	50	49.23	1
COMMERCIAL (HOSTEL)	Residential	Hostel	> 0	10	1	1
Total:			-	-	-	2

Parking Check (Table 7b)

Vehicle Type	Reqd.		Achieved	
	No.	Area (Sq.mt.)	No.	Area (Sq.mt.)
Car	2	27.50	2	27.50
Total Car	2	27.50	2	27.50
TwoWheeler	-	13.75	0	0.00
Other Parking	-	-	-	20.74
Total		41.25		48.24

FAR & Tenement Details

Block	No. of Same Bldg	Total Built Up Area (Sq.mt.)	Deductions (Area in Sq.mt.)					Proposed FAR Area (Sq.mt.)		Add Area In FAR (Sq.mt.)	Total FAR Area (Sq.mt.)	Tmtt (No.)	Carpet Area other than Tenement
			Stair/Case	Lift	Lift Machine	Void	Parking	Resi.	Commercial				
COMMERCIAL (HOSTEL)	1	481.17	21.03	10.80	2.16	44.22	48.24	295.50	49.23	9.99	354.72	01	19.47
Grand Total:	1	481.17	21.03	10.80	2.16	44.22	48.24	295.50	49.23	9.99	354.72	1.00	19.47

OWNER / GPA HOLDER'S SIGNATURE
OWNER'S ADDRESS WITH ID NUMBER & CONTACT NUMBER :
L.R.DAMAYANTHI P D V KANDIGA
BANGALURUPALYAM NALAGAMPALLE

L. New

ARCHITECT/ENGINEER /SUPERVISOR 'S SIGNATURE
SUSHMITHA S #307, 2nd stage 6th block nagarabhavi BCC/BL-3.6/433

Sushmitha S

PROJECT TITLE :
PROPOSED COMMERCIAL & HOSTEL BUILDING FOR L.R.DAMAYANTHI,
ON SITE NO:167, KHATHA NO:2069/167/1994/2059, MYLASANDRA,
BENGALURU WARD NO:198.

DRAWING TITLE : 552076530-22-10-2019
05-39-13\$, \$35X63
BG3 W198

SHEET NO : 1 DAMAYANTHI COMM
HSTL